Enterprise: Common

Solution Integration Guide for Communication Server 1000 Release 5.0/Business Communications Manager

NN43001-326

Document status: Standard
Document version: 01.06
Document date: 12 March 2008

Copyright © 2008, Nortel Networks
All Rights Reserved.

LEGAL NOTICE
While the information in this document is believed to be accurate and reliable, except as otherwise expressly agreed to in writing NORTEL PROVIDES THIS DOCUMENT "AS IS" WITHOUT WARRANTY OR CONDITION OF ANY KIND, EITHER EXPRESS OR IMPLIED. The information and/or products described in this document are subject to change without notice.

Nortel, the Nortel logo, and the Globemark are trademarks of Nortel Networks.
Microsoft, MS, MS-DOS, Windows, and Windows NT are trademarks of Microsoft Corporation.
All other trademarks are the property of their respective owners.

Sourced in Canada.

Contents

How to get help 7
Finding the latest updates on the Nortel Web site 7
Getting help from the Nortel Web site 7
Getting help over the phone from a Nortel Solutions Center 7
Getting help from a specialist by using an Express Routing Code 8
Getting help through a Nortel distributor or reseller 8

About this document 9
Audience 9
Related information 9

Overview 11

Prerequisites 17
Knowledge requirements 17
Training 17
Capturing integration parameters 18
Establishing the system baseline 19

CS 1000 setup and IP Peer Networking configuration 25
CS 1000/IP Peer Networking configuration procedures 25
H.323 Call Server configuration 26
Defining the customer to support ISDN 27
Creating the virtual D-channel 30
Configuring zones (LD 117) 32
Creating the virtual route (LD 16) 34
Creating the virtual trunks (LD 14) 37
Creating the ESN data block for CDP 40
Creating the Network Control Block (NCTL) for network access (LD 87) 43
Creating the RLB for the virtual trunk route (LD 86) 44
Creating the CDP steering codes (LD 87) 46
Checking CODEC and QoS settings 47
H.323 Gatekeeper configuration 50
Configuring Element Manager 50
SIP protocol configuration 52
Enabling the SIP Virtual Trunk application 53

Copyright © 2008, Nortel Networks

Configuring the SIP Gateway 55
Configuring the SIP Redirect Server and URI map 57
Configuring IP networking for SIP 59

NRS configuration 85
NRS configuration procedures 85
Launching NRS Manager 85
Verifying and adjusting system-wide settings 87
Configuring the NRS server settings (H.323 Gatekeeper or SIP) 89
Configuring the service domain 91
Configuring the L1 domain (UDP) 92
Configuring the L0 domain (CDP) 94
Configuring Gateway endpoints 97
Configuring routing entries 101
Configuring collaborative servers 103
Updating the database 105
Checking the status of registered endpoints 106
Checking the status of virtual D-channels 107
Checking the status of virtual trunks 108

BCM 200/400 configuration 111
BCM 200/400 configuration procedures 111
Configuring incoming VoIP trunks 111
Verifying system license and keycodes 112
Configuring VoIP trunk media parameters 113
Configuring local Gateway parameters 116
Configuring target lines 121
Configuring VoIP lines 124

BCM50 configuration 131
BCM50 configuration procedures 131
Configuring incoming VoIP trunks 131
Verifying system license and keycodes 132
Configuring VoIP trunk media parameters 133
Configuring local Gateway parameters 137
Configuring VoIP lines 141
Configuring target lines 145

Testing and troubleshooting 149
Testing and troubleshooting procedures 149
Testing 149
Testing the integration from the BCM system 150
Testing the integration from the CS 1000 system 152
Troubleshooting 152
BCM is unable to contact the gatekeeper at IP address 152
Unable to complete any calls 152

Copyright © 2008, Nortel Networks

Cannot make calls between the CS 1000 and BCM 153
BCM fails to register to NRS 153
H.323 Gateway service is down 154

Copyright © 2008, Nortel Networks

Copyright © 2008, Nortel Networks

How to get help

This chapter explains how to get help for Nortel products and services.

Finding the latest updates on the Nortel Web site

The content of this documentation is current at the time of product release. To check for updates to the latest documentation and software, go to the Nortel Technical Support Web site:

www.nortel.com/support

Getting help from the Nortel Web site

The best way to get technical support for Nortel products is from the Nortel Technical Support Web site:

www.nortel.com/support

This site provides quick access to software, documentation, bulletins, and tools to address issues with Nortel products. From this site, you can:

- download software, documentation, and product bulletins
- search the Technical Support Web site and the Nortel Knowledge Base for answers to technical issues
- sign up for automatic notification of new software and documentation for Nortel equipment
- open and manage technical support cases

Getting help over the phone from a Nortel Solutions Center

If you do not find the information you require on the Nortel Technical Support Web site, and you have a Nortel support contract, you can also get help over the phone from a Nortel Solutions Center.

In North America, call 1-800-4NORTEL (1-800-466-7835).

Outside North America, go to the following Web site to obtain the phone number for your region:

Copyright © 2008, Nortel Networks

www.nortel.com/callus

Getting help from a specialist by using an Express Routing Code

To access some Nortel Technical Solutions Centers, you can use an Express Routing Code (ERC) to quickly route your call to a specialist in your Nortel product or service. To locate the ERC for your product or service, go to:

www.nortel.com/erc

Getting help through a Nortel distributor or reseller

If you purchase a service contract for your Nortel product from a distributor or authorized reseller, you can contact the technical support staff for that distributor or reseller.

Copyright © 2008, Nortel Networks

About this document

This document describes the planning, configuration, and troubleshooting of the integration of the Business Communications Manager (BCM) with a Communication Server 1000 system. Integrate the CS 1000 and BCM systems when both systems have been installed and a baseline of operation has been achieved and tested.

The following systems and software releases are covered in this guide:

- Communication Server 1000 (CS 1000) Release 5.0
- Business Communications Manager 200 (BCM 200) Release 4.0
- Business Communications Manager 400 (BCM 400) Release 4.0
- Business Communications Manager 50 (BCM50) Release 2.0

This document is intended to be a stand-alone guide, covering the prerequisites to and implementation of a successful CS 1000/BCM integration. A minimum skill set and level of understanding are assumed. References to other NTPs, engineering guides, or troubleshooting guides are made for informational purposes.

Audience

The intended audience for this document includes installation, planning, and maintenance personnel.

Related information

The following NTPs are referenced in this guide:

- *BCM 4.0 Device Configuration Guide* (N0060600)
- *BCM 4.0 Telephony Device Installation Guide* (N0060609)
- *BCM50 Networking Configuration Guide* (NN40020-603)
- *Communication Server 1000E: Installation and Configuration* (553-3041-210)
- *Communication Server 1000M and Meridian 1: Large System Installation and Configuration* (553-3021-210)

Copyright © 2008, Nortel Networks

- *Communication Server 1000M and Meridian 1: Small System Installation and Configuration* (553-3011-210)
- *Communication Server 1000S: Installation and Configuration* (553-3031-210)
- *Dialing Plans: Description* (553-3001-183)
- *IP Line Description, Installation, and Maintenance* (553-3001-365)
- *IP Peer Networking Installation and Configuration Guide* (553-3001-213)
- *Keycode Installation Guide* (NN40010-301)
- *Signaling Server: Installation and Configuration* (553-3001-212)

Copyright © 2008, Nortel Networks

Overview

An example of a Communication Server 1000/Business Communications Manager (BCM) systems integration is shown in Figure 1 "CS 1000/BCM architecture" (page 12).

Copyright © 2008, Nortel Networks

Figure 1
CS 1000/BCM architecture

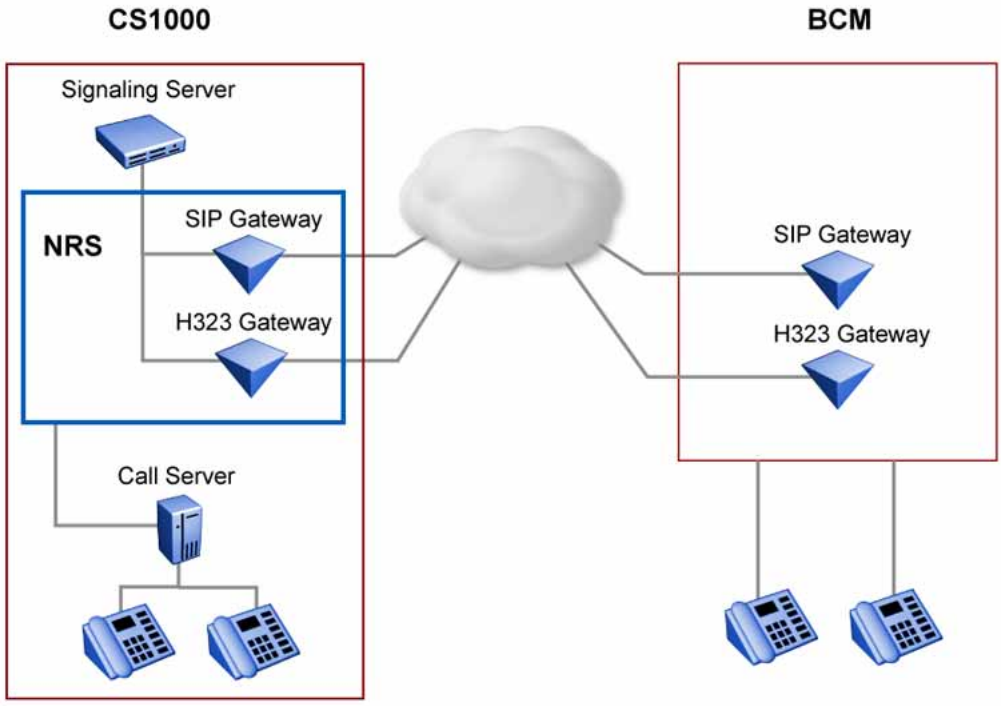

CS 1000 Gateway IP address	192.167.102.1	
CS 1000 Endpoint IP address	192.167.103.2	
BCM 400 Endpoint IP address	192.168.249.27	BCM Gateway Alias name BCM40
Signaling Server T-LAN IP Address	192.167.103.3	
Signaling Server E-LAN IP address	192.167.102.4	
Call Server E-LAN IP Address	192.167.102.3	
NRS IP Address	192.167.103.2	NRS Host name CS1000E_PIV
NCS IP Address	192.167.103.3	
BCM IP Address	192.168.249.27	

Figure 2 "CS 1000/BCM integration process" (page 13) shows the sequence of procedures you perform to integrate the CS 1000 and BCM systems.

Copyright © 2008, Nortel Networks

Figure 2
CS 1000/BCM integration process

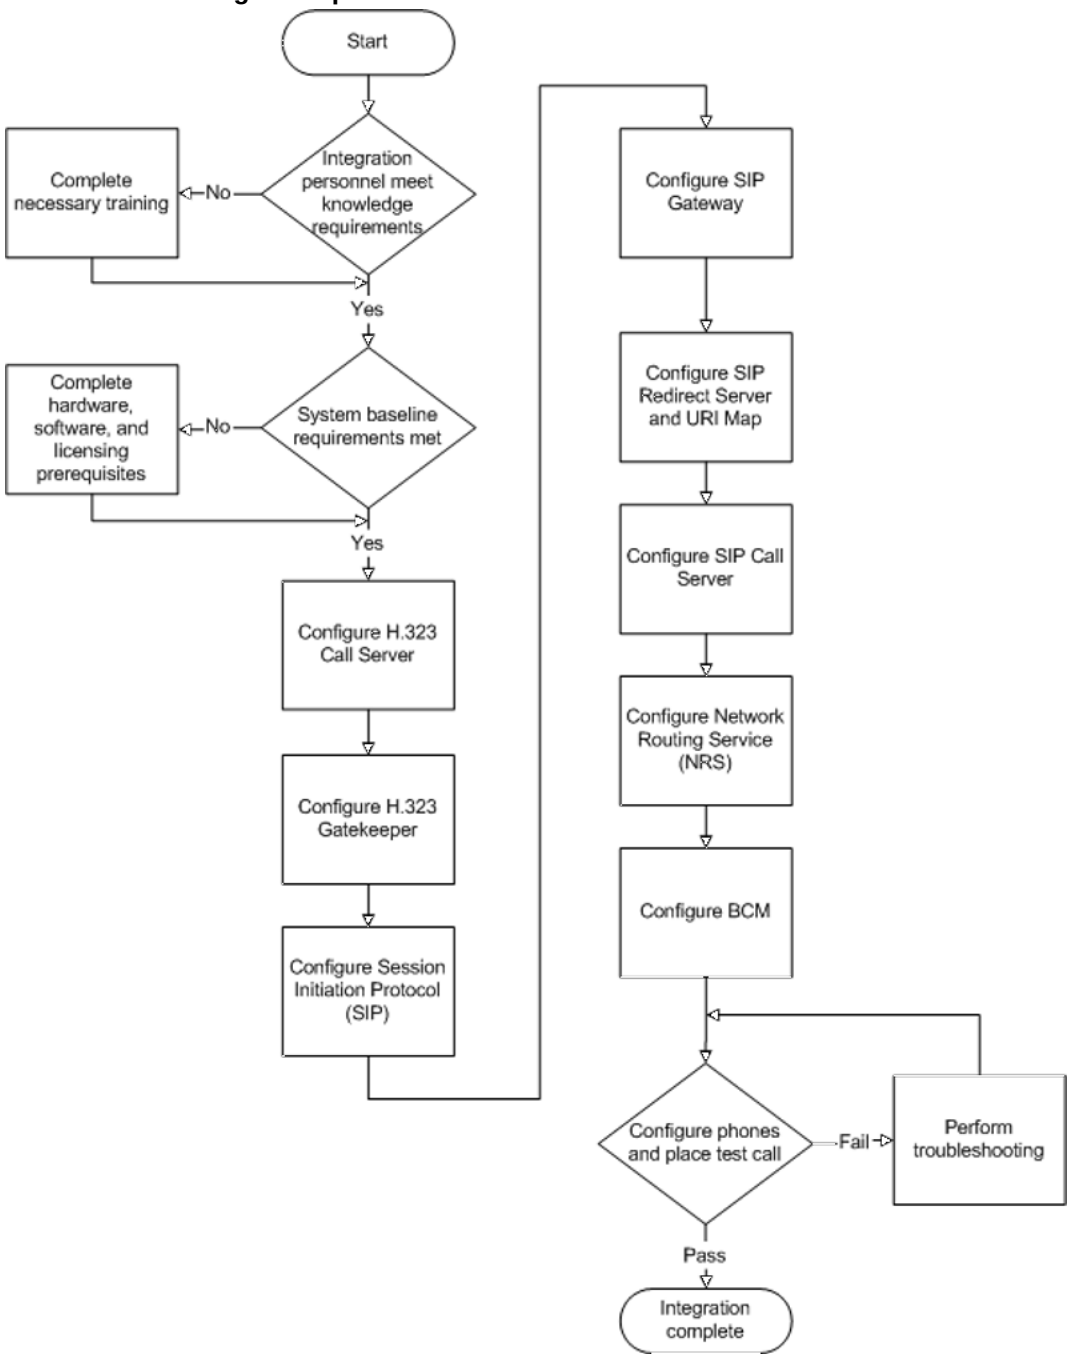

The tasks in the CS 1000/BCM systems integration process are listed in Table 1 "Task Completion Checklist" (page 14). Use this checklist to implement the integration.

Copyright © 2008, Nortel Networks

Table 1
Task Completion Checklist

	Task	Reference
	Configure the H.323 Call Server	1. "Defining the customer to support ISDN" (page 27) 2. "Creating the virtual D-channel" (page 30) 3. "Configuring zones (LD 117)" (page 32) 4. "Creating the virtual route (LD 16)" (page 34) 5. "Creating the virtual trunks (LD 14)" (page 37) 6. "Creating the ESN data block for CDP" (page 40) 7. "Creating the Network Control Block (NCTL) for network access (LD 87)" (page 43) 8. "Creating the RLB for the virtual trunk route (LD 86)" (page 44) 9. "Creating the CDP steering codes (LD 87)" (page 46) 10. "Checking CODEC and QoS settings" (page 47)
	Configure the H.323 Gatekeeper	"Configuring Element Manager" (page 50)
	Configure the SIP protocol	"Enabling the SIP Virtual Trunk application" (page 53)
	Configure the SIP Gateway	"Configuring the SIP Gateway" (page 55)
	Configure the SIP Redirect Server and URI Map	"Configuring the SIP Redirect Server and URI map" (page 57)
	Configure the SIP Call Server	1. "Defining the customer to support ISDN" (page 59) 2. "Creating the virtual D-channel" (page 62) 3. "Configuring zones (LD 117)" (page 65) 4. "Creating the virtual route (LD 16)" (page 67) 5. "Creating the virtual trunks (LD 14)" (page 70) 6. "Creating the ESN data block for CDP" (page 73) 7. "Creating the Network Control Block (NCTL) for network access (LD 87)" (page 76) 8. "Creating the RLB for the virtual trunk route (LD 86)" (page 77) 9. "Creating the CDP steering codes (LD 87)" (page 79) 10. "Checking CODEC and QoS settings" (page 81)

Copyright © 2008, Nortel Networks

	Task	Reference
	Configure NRS	1. "Launching NRS Manager" (page 85) 2. "Verifying and adjusting system-wide settings" (page 87) 3. "Configuring the NRS server settings (H.323 Gatekeeper or SIP)" (page 89) 4. "Configuring the service domain" (page 91) 5. "Configuring the L1 domain (UDP)" (page 92) 6. "Configuring the L0 domain (CDP)" (page 94) 7. "Configuring Gateway endpoints" (page 97) 8. "Configuring routing entries" (page 101) 9. "Configuring collaborative servers" (page 103) 10. "Updating the database" (page 105) 11. "Checking the status of registered endpoints" (page 106) 12. "Checking the status of virtual D-channels" (page 107) 13. "Checking the status of virtual trunks" (page 108)
	Configure BCM	BCM 200/400 1. "Configuring incoming VoIP trunks" (page 111) 2. "Verifying system license and keycodes" (page 112) 3. "Configuring VoIP trunk media parameters" (page 113) 4. "Configuring local Gateway parameters" (page 116) 5. "Configuring target lines" (page 121) 6. "Configuring VoIP lines" (page 124) BCM50 1. "Configuring incoming VoIP trunks" (page 131) 2. "Verifying system license and keycodes" (page 132) 3. "Configuring VoIP trunk media parameters" (page 133) 4. "Configuring local Gateway parameters" (page 137) 5. "Configuring VoIP lines" (page 141) 6. "Configuring target lines" (page 145)

Copyright © 2008, Nortel Networks

Copyright © 2008, Nortel Networks

Prerequisites

Before you begin to integrate the Communication Server 1000 (CS 1000) and Business Communications Manager (BCM) systems, ensure that you complete the following prerequisites:

- "Knowledge requirements" (page 17)
- "Capturing integration parameters" (page 18)
- "Establishing the system baseline" (page 19)

Knowledge requirements

The following knowledge and skills are required to implement a CS 1000/BCM systems integration:

- basic programming and provisioning skills for the CS 1000 system
- basic programming and provisioning skills for Network Routing Service (NRS)
- basic programming and provisioning skills for BCM systems
- working knowledge of various operating systems, including VxWorks, Unix, Linux, and Windows
- principles of Voice over IP (VoIP) protocols
- networking principles
- knowledge of core data components

Training

Nortel recommends that you complete product-specific training before you begin integrating the CS 1000 and BCM systems. Training includes course 6034C, “CS 1000 BCM Multi-site Integration”, which deals specifically with the CS 1000/BCM integration and multi-site BCM integration processes. A complete list of courses is available at www.nortel.com

Copyright © 2008, Nortel Networks

Capturing integration parameters

Table 2 "Integration parameters" (page 18) provides a list of parameters required to successfully complete the integration. Record these parameters during the initial planning phase of the integration.

Table 2
Integration parameters

Parameter	Value
User IDs and passwords	
SIP Gateway endpoint authentication password (must match the NRS password)	
IP addresses and URLs	
Gatekeeper IP address	
Alternate Gatekeeper IP address (optional)	
T-LAN IP address of the Signaling Server	
T-LAN IP address of the alternate Signaling Server	
Primary SIP proxy address	
Alternate SIP proxy address	
Primary NCS IP address	
Alternate NCS IP address)	
Static endpoint IP address (same as the Node IP address)	
Collaborative server IP address	
Names	
Service domain name in NRS	
SIP domain name (must be the same as the service domain name)	
SIP Gateway endpoint name (must match the NRS user ID)	
L0 domain name	
L1 domain name	
H.323 ID (preferable if it is the same as the one in the Primary Signaling Server)	
H.323 Gatekeeper alias name (default is the H.323 ID)	
Endpoint alias for BCM	
Read and write community names	
Miscellaneous	

Copyright © 2008, Nortel Networks

Parameter	Value
Coordinated Dialing Plan steering codes	
SIP access port to use (port 5060 is recommended)	

Establishing the system baseline

To successfully integrate voice services, you must first establish the system baseline for the Call Server, Signaling Server, and Business Communications Manager (BCM) so that the systems are configured and working in a stand-alone environment.

Use Table 3 "Pre-integration checklist" (page 19) to complete system baselines prior to integration.

Table 3
Pre-integration checklist

	Task	Reference	Comments
	The Enterprise software package is purchased and installed, with appropriate licenses for virtual trunks, lines, and IP Phones as required.		
	The Network Numbering Plan is implemented.	*Dialing Plans: Description* (553- 3001-183)	Are you using a Uniform Dialing Plan (UDP) or a Coordinated Dialing Plan (CDP), or both? Are you also using a Group Dialing Plan (GDP), a North American Numbering Plan (NANP), or a Flexible Numbering Plan (FNP)?
	CS 1000 software is Release 5.0.		To check the CS 1000 software release: Log on, enter **LD 22**, and type **PRT ISS**. OR **1** Log on to Element Manager. **2** On the left navigation pane, select **Home**. The System Overview page appears.

Copyright © 2008, Nortel Networks

	Task	Reference	Comments
			3 The software release is referred to as Release.
	Signaling Server software is Release 5.0.		The Signaling Server software should be the most recent GA release compatible with your Call Server software version. To check the software release of the Signaling Server: **1** Log on to Element Manager. **2** On the left navigation pane, select **Home**. The System Overview page appears. **3** Refer to the Signaling Server Details section for the Software Version.
	Basic installation, setup, and configuration of the Call Server components and the Signaling Server are complete.	*Communication Server 1000M and Meridian 1: Small System Installation and Configuration* (553-3011-210) *Communication Server 1000M and Meridian 1: Large System Installation and Configuration* (553-3021-210) *Communication Server 1000S: Installation and Configuration* (553-3031-210) *Communication Server 1000E: Installation and Configuration* (553-3041-210) *Signaling Server: Installation and Configuration* (553-3001-212)	

Copyright © 2008, Nortel Networks

	Task	Reference	Comments
	Primary, alternate, and fail-safe Network Routing Service (NRS) are configured at installation and initial setup of the Signaling Server.	*Signaling Server: Installation and Configuration* (553-3001-212)	The NRS requires IP telephony node configuration files. These files are installed and configured during the Signaling Server software installation as a basic configuration step.
	Digital Data Block configuration is complete in LD 73.	*IP Peer Networking Installation and Configuration Guide* (553-3001-213)	To configure a Digital Data Block: **1** Connect to the Call Server. **2** Enter **LD 73**. **3** Enter **NEW**. **4** Enter **DDB**. **5** Press Enter to accept all defaults. **6** Perform a data dump.
	PTI or DTI trunks (DLOP) configuration is complete in LD 17.	*IP Peer Networking Installation and Configuration Guide* (553-3001-213)	To check PTI or DTI trunks: **1** Log on to Element Manager. **2** Select **Routes and Trunks > Digital Trunk Interface**. **3** Select **Digital Trunk Interface Data Block (DDB)**. **4** Check that the configuration is complete.
	A basic node is configured in Element Manager.	*IP Line Description, Installation, and Maintenance* (553- 3001-365)	This node information is updated through the integration process.
	Voice Gateway Media Card configuration is complete if IP to PSTN translation is required.		To check that Media Gateway Cards are installed: **1** Log on to Element Manager. **2** On the left side navigation pane, expand the **System** tab. **3** Expand the **Software** tab. **4** Select **Voice Gateway Media Card**.

Copyright © 2008, Nortel Networks

	Task	Reference	Comments
			The Voice Gateway Media Card (VGMC) Loadware Upgrade page appears. **5** Select **Open all nodes**. **Attention:** The servers and Media Cards installed and configured are listed under each node. Any installed Voice Gateway Media Card is listed under Type.
	H.323 Virtual Trunk package 399 is installed.		To check that the package is loaded: **1** Connect to the Call Server. **2** Log on to the Signaling Server. **3** Enter **LD 22**. **4** Enter **PRT**. **5** Enter **PKG 399**. **6** The package is loaded if you do not receive a "package is restricted" message.
	IPT is Release 3.0 or newer if you are using IP Trunk cards.		To check that IPT Trunk cards are installed: **1** Log on to Element Manager. **2** On the left navigation pane, expand the **IP Network** tab. **3** Select **Nodes: Servers, Media Cards**. **4** Expand the appropriate Node. **Attention:** The servers and Media Cards installed and configured are listed under each node. Any installed IPT Trunk cards are listed under Type.
	BCM configuration is complete and passing data traffic.		

Copyright © 2008, Nortel Networks

	Task	Reference	Comments
	BCM networking hardware is installed for integration.		To check the installed hardware: **1** Log on to Element Manager. **2** Select the **Administration** tab. **3** Expand the **General** folder. **4** Select **Hardware Inventory**. **5** Select the **PCI cards** tab. The cards installed in BCM are listed.
	PEC III Media Service Cards (MSC) are later.		PECIII MSCs are required for T.38 Fax and IP telephony. To check the PEC hardware: **1** Log on to Element Manager. **2** Select the **Administration** tab. **3** Expand the **General** folder. **4** Select **Hardware Inventory**. **5** Select the **PCI cards** tab. **6** Select the **MSC PCI card** and scroll down to the Details for Card section.
	BCM 200/400 is Release 4.0. BCM50 is Release 2.0.		To check the software version: **1** Log on to Element Manager. **2** Select the **Configuration** tab. **3** Expand the **System** folder. **4** Select **Identification**.

Copyright © 2008, Nortel Networks

	Task	Reference	Comments
	VoIP Gateway Trunk licensing is purchased and loaded on BCM.	*Keycode Installation Guide* (NN40010-301)	To check Feature Licenses: **1** Log on to Element Manager. **2** Select the **Configuration** tab. **3** Expand the **System** folder. **4** Select **Keycodes**.
	IP Client licensing is purchased and loaded on BCM.	*Keycode Installation Guide* (NN40010-30	To check Feature Licenses: **1** Log on to Element Manager. **2** Select the **Configuration** tab. **3** Expand the **System** folder. **4** Select **Keycodes**.
	MCDN feature licensing is purchased and loaded on BCM.	*Keycode Installation Guide* (NN40010-30	To check Feature Licenses: **1** Log on to Element Manager. **2** Select the **Configuration** tab. **3** Expand the **System** folder. **4** Select **Keycodes**.

Copyright © 2008, Nortel Networks

CS 1000 setup and IP Peer Networking configuration

Although you can configure the Communication Server 1000 and IP Peer Networking through overlays, the use of Element Manager and Network Routing Services (NRS) Manager are recommended. The Element Manager Web server resides on the Signaling Server and you can access it directly through a Web browser or by using Optivity Telephony Manager (OTM). You must configure NRS through Network Routing Service Manager (NRS Manager), which you can access only through the Element Manager.

Configure the Call Server through Element Manager in the following order:

- H.323 Call Server
- H.323 Gate Keeper
- Session Initiation Protocol (SIP)
  - SIP Protocol
  - SIP Gateway
  - SIP Redirect Server and URI Map
  - SIP Call Server
  - Network Routing Service in the NRS Manager
  - SIP addressing
  - SIP virtual trunking

CS 1000/IP Peer Networking configuration procedures

The sequence of CS 1000/IP Peer Networking configuration procedures is as follows:

- "H.323 Call Server configuration" (page 26)
  - "Defining the customer to support ISDN" (page 27)
  - "Creating the virtual D-channel" (page 30)
  - "Configuring zones (LD 117)" (page 32)

Copyright © 2008, Nortel Networks

— "Creating the virtual route (LD 16)" (page 34)
— "Creating the virtual trunks (LD 14)" (page 37)
— "Creating the ESN data block for CDP" (page 40)
— "Creating the Network Control Block (NCTL) for network access (LD 87)" (page 43)
— "Creating the RLB for the virtual trunk route (LD 86)" (page 44)
— "Creating the CDP steering codes (LD 87)" (page 46)
— "Checking CODEC and QoS settings" (page 47)

- "H.323 Gatekeeper configuration" (page 50)
  — "Configuring Element Manager" (page 50)

- "SIP protocol configuration" (page 52)
  — "Enabling the SIP Virtual Trunk application" (page 53)
  — "Configuring the SIP Gateway" (page 55)
  — "Configuring the SIP Redirect Server and URI map" (page 57)
  — "Defining the customer to support ISDN" (page 27)
  — "Creating the virtual D-channel" (page 30)
  — "Configuring zones (LD 117)" (page 32)
  — "Creating the virtual route (LD 16)" (page 34)
  — "Creating the virtual trunks (LD 14)" (page 37)
  — "Creating the ESN data block for CDP" (page 40)
  — "Creating the Network Control Block (NCTL) for network access (LD 87)" (page 43)
  — "Creating the RLB for the virtual trunk route (LD 86)" (page 44)
  — "Creating the CDP steering codes (LD 87)" (page 46)
  — "Checking CODEC and QoS settings" (page 47)

H.323 Call Server configuration

The procedures in this section are as follows:

- "Defining the customer to support ISDN" (page 27)
- "Creating the virtual D-channel" (page 30)
- "Configuring zones (LD 117)" (page 32)
- "Creating the virtual route (LD 16)" (page 34)
- "Creating the virtual trunks (LD 14)" (page 37)

Copyright © 2008, Nortel Networks

- "Creating the ESN data block for CDP" (page 40)
- "Configuring the L0 domain (CDP)" (page 94)
- "Creating the RLB for the virtual trunk route (LD 86)" (page 44)
- "Creating the CDP steering codes (LD 87)" (page 46)
- "Checking CODEC and QoS settings" (page 47)

Defining the customer to support ISDN

Complete the following procedure to define the customer to support ISDN.

Step	Action
1	Log on to Element Manager.
2	Select **Customers**.
3	Select the **Customer Number** you wish to edit. The Customer Edit page appears. See Figure 3 "Customer Edit" (page 28).

Copyright © 2008, Nortel Networks

Figure 3
Customer Edit

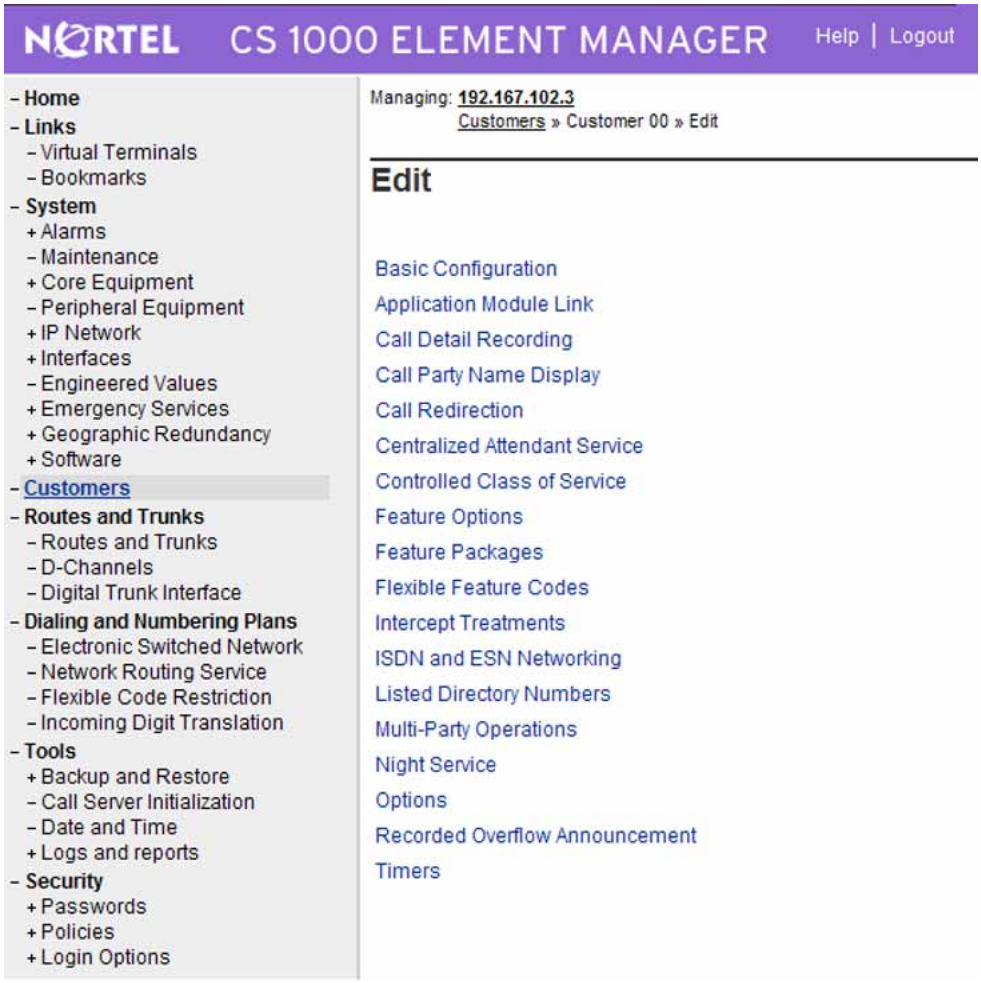

4 Select the **Feature Packages** heading.
The Feature Packages page appears. See Figure 4 "Feature Packages" (page 29).

Copyright © 2008, Nortel Networks

Figure 4
Feature Packages

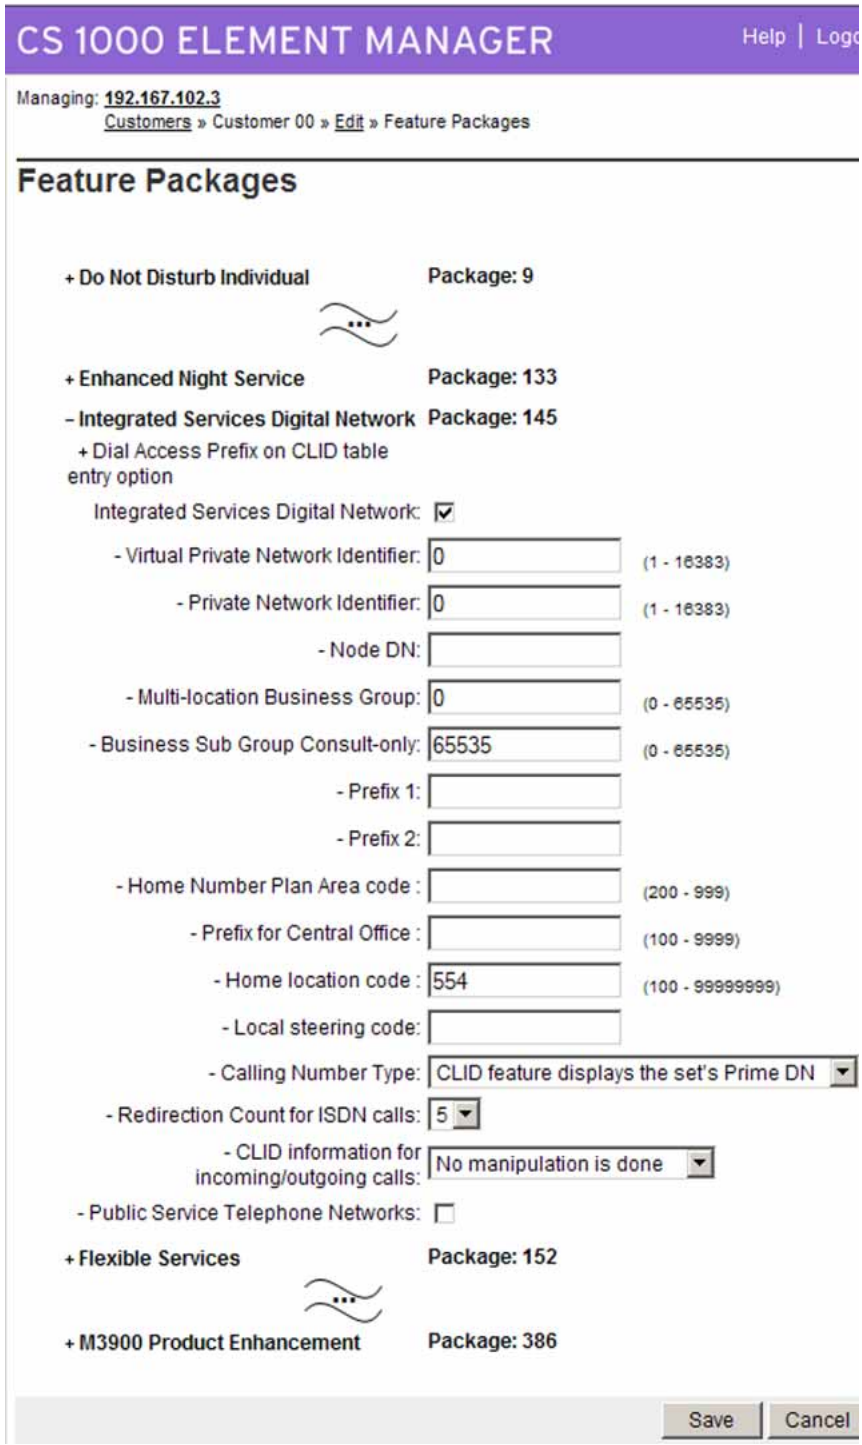
CS 1000 ELEMENT MANAGER
Help | Logo
Managing: 192.167.102.3
Customers » Customer 00 » Edit » Feature Packages
Feature Packages
+ Do Not Disturb Individual
Package: 9
+ Enhanced Night Service
Package: 133
– Integrated Services Digital Network
Package: 145
+ Dial Access Prefix on CLID table entry option
Integrated Services Digital Network:
- Virtual Private Network Identifier: 0 (1 - 16383)
- Private Network Identifier: 0 (1 - 16383)
- Node DN:
- Multi-location Business Group: 0 (0 - 65535)
- Business Sub Group Consult-only: 65535 (0 - 65535)
- Prefix 1:
- Prefix 2:
- Home Number Plan Area code : (200 - 999)
- Prefix for Central Office : (100 - 9999)
- Home location code : 554 (100 - 99999999)
- Local steering code:
- Calling Number Type: CLID feature displays the set's Prime DN
- Redirection Count for ISDN calls: 5
- CLID information for incoming/outgoing calls: No manipulation is done
- Public Service Telephone Networks:
+ Flexible Services
Package: 152
+ M3900 Product Enhancement
Package: 386
Save
Cancel

Copyright © 2008, Nortel Networks

5 Expand the **Integrated Services Digital Network Package 145** heading.

6 Ensure that the **Integrated Services Digital Network** check box is selected.

7 Click **Save**.

—End—

Creating the virtual D-channel

Perform the following procedure to create the virtual D-channel.

Step	Action
1	Log on to Element Manager.
2	Select **Routes and Trunks > D-Channels**. A message appears if a D-channel is not configured. Click **OK**. The D-Channels page appears. See Figure 5 "D-Channels" (page 30).

Figure 5
D-Channels

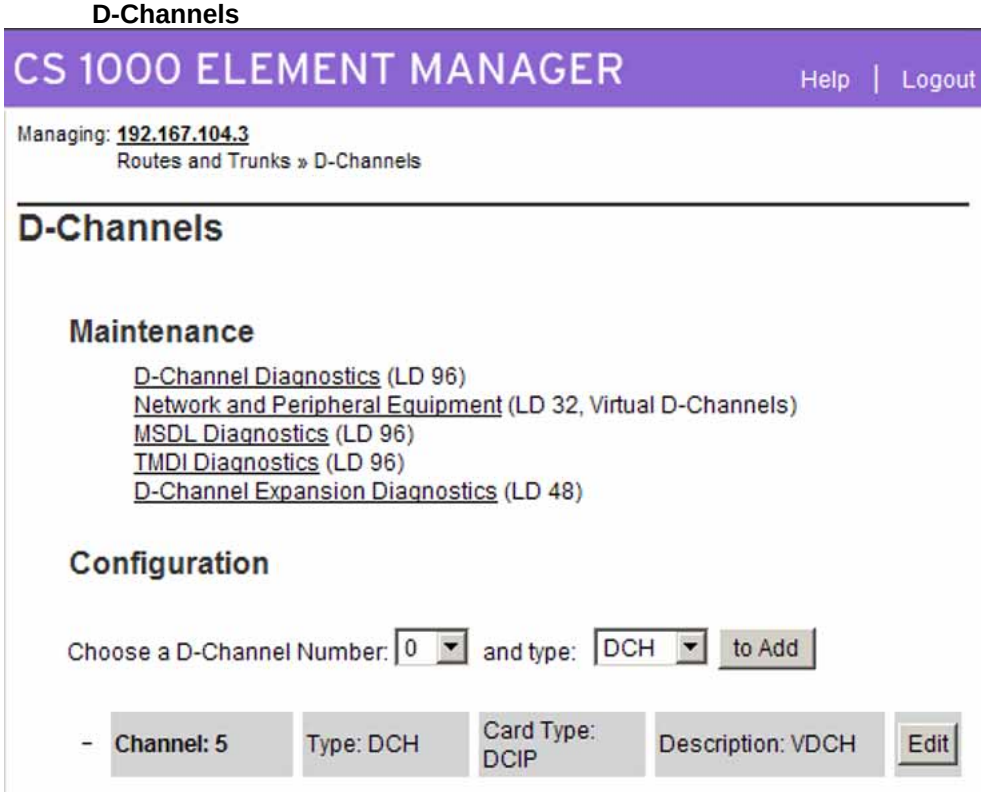

Copyright © 2008, Nortel Networks

3 From the **Choose a D-Channel Number** menu, select the D-Channel number.
D-channels 0,1, and 2 are usually used or shared with other applications. It is recommended that you begin configuring virtual D-channels on channel 3.

4 From the **Type** menu, select the D-Channel type.

5 Click **to Add**.
The D-Channels Property Configuration page appears. See Figure 6 "D-Channels Property Configuration" (page 31).

Figure 6
D-Channels Property Configuration

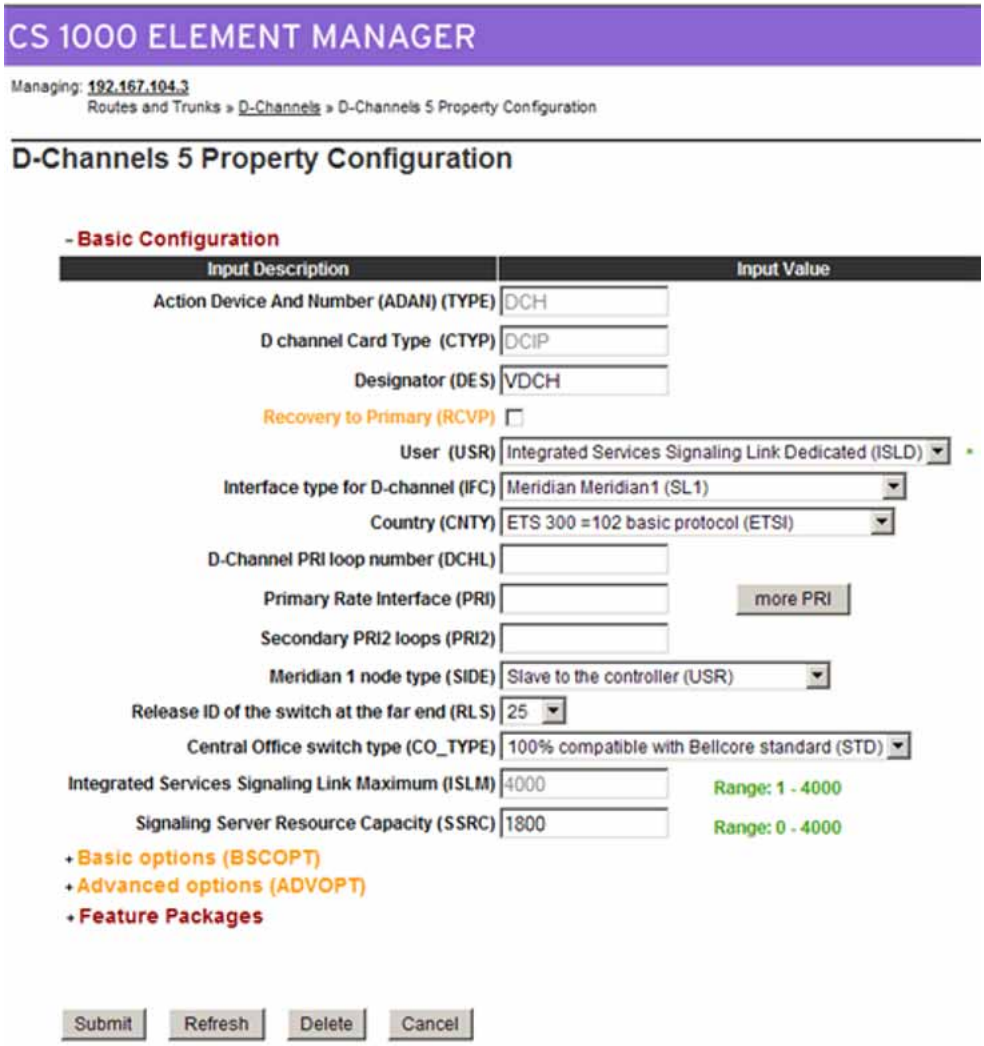

Copyright © 2008, Nortel Networks

6 For the **D channel Card Type (CTYP)**, select **D-Channel is over IP (DCIP)**.

7 For the **Designator (DES)**, type a meaningful name.
The Designator must not contain spaces; use underscores instead.
Make a note of the Designator in your records for future reference.

8 For **User (USR)**, select **Integrated Services Signaling Link Dedicated (ISLD)**.

9 For **Interface type for D-channel (IFC)**, select **Meridian Meridian1 (SL1)**.

10 Leave all other parameters as is and click **Submit**.
The new channel appears.

—End—

Configuring zones (LD 117)

Before you can configure the virtual routes and trunks, the following zones must be configured, in any order:

- Zone 1 = IP Phones zone (ZBRN = MO)
- Zone 2 = Voice Gateway Channels zone, which should be different from the IP Phones zone (ZBRN = VTRK)

Ensure that enough bandwidth is allocated for the zones with the heaviest traffic.

Never use or configure zone 0.

Step	Action
1	Log on to Element Manager.
2	Select **System > IP Network > Zones**. See Figure 7 "Zones" (page 33).

Copyright © 2008, Nortel Networks

Figure 7
Zones

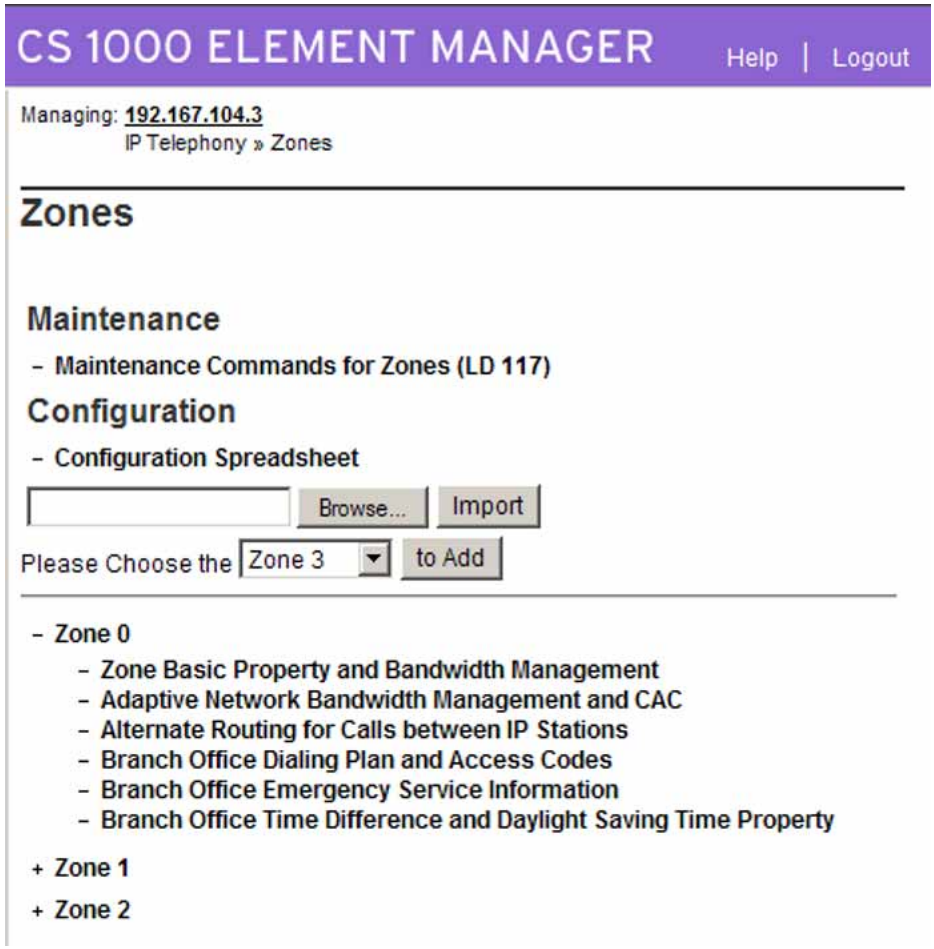
CS 1000 ELEMENT MANAGER
Help | Logout
Managing: 192.167.104.3
IP Telephony » Zones
Zones
Maintenance
- Maintenance Commands for Zones (LD 117)
Configuration
- Configuration Spreadsheet
Browse...
Import
Please Choose the Zone 3
to Add
- Zone 0
- Zone Basic Property and Bandwidth Management
- Adaptive Network Bandwidth Management and CAC
- Alternate Routing for Calls between IP Stations
- Branch Office Dialing Plan and Access Codes
- Branch Office Emergency Service Information
- Branch Office Time Difference and Daylight Saving Time Property
+ Zone 1
+ Zone 2

3 Select the **Zone** you wish to configure.
Configured zones appear in the list at the bottom of the page.

4 Click **to Add**.

5 After you click **to Add**, a message may appear prompting you to use the Zone Basic Property and Bandwidth Management Spreadsheet. Click **OK**.

6 Leave the default values for bandwidth and resource type as is.

7 Set the **Zone Intent (ZBRN)** as follows:

- Zone 1 is for the IP Phones at the Main Office. Set Zone Intent (ZBRN) for Zone 1 to **MO (MO)**.
- Zone 2 is for the Voice Gateway Channels. Set Zone Intent (ZBRN) for Zone 2 to **VTRK (VTRK)**.

Copyright © 2008, Nortel Networks

See Figure 8 "Zone Basic Property and Bandwidth Management" (page 34).

Figure 8
Zone Basic Property and Bandwidth Management

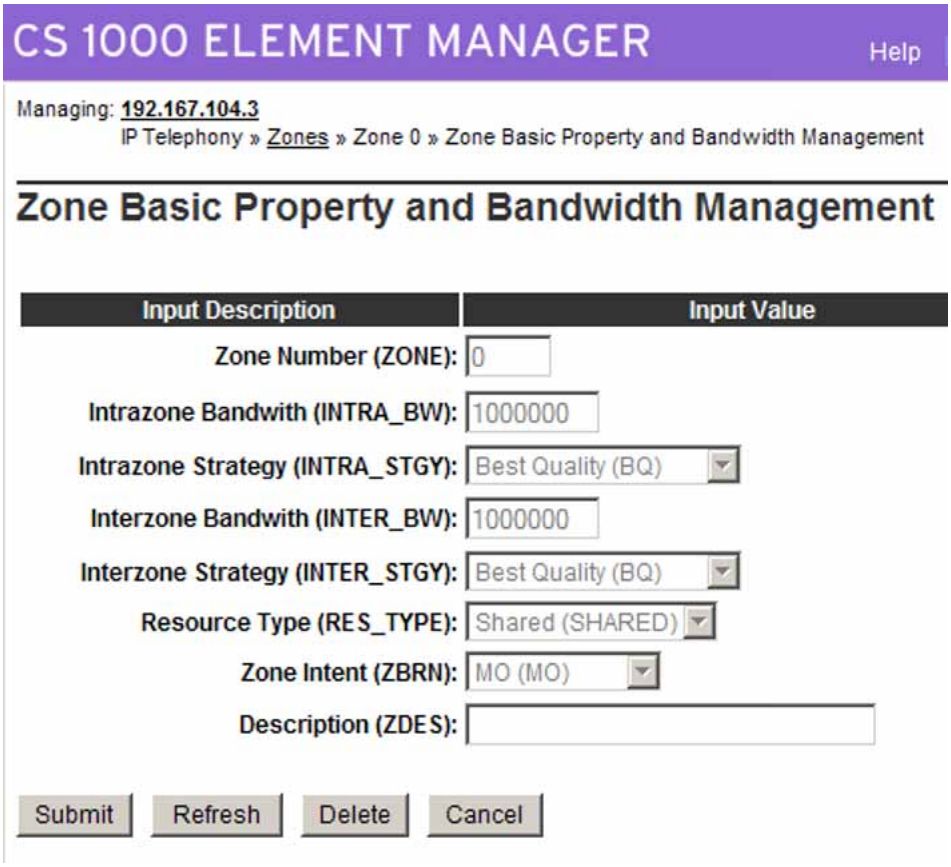

8 For **Description (ZDES)**, type a meaningful description.

9 Click **Submit**.

10 Repeat this procedure for all additional zones you wish to create.

—End—

Creating the virtual route (LD 16)

Perform the following procedure to create the virtual route.

Step	Action
1	Log on to Element Manager.

Copyright © 2008, Nortel Networks

2 Select **Routes and Trunks > Routes and Trunks**.

3 Click the **Add route** button.
The Route Property Configuration page appears. The trunk type (TKTP) you choose determines the parameters available on this page. See Figure 9 "Route Property Configuration" (page 36) for one possible view of the Route Property Configuration page.

Copyright © 2008, Nortel Networks

Figure 9
Route Property Configuration

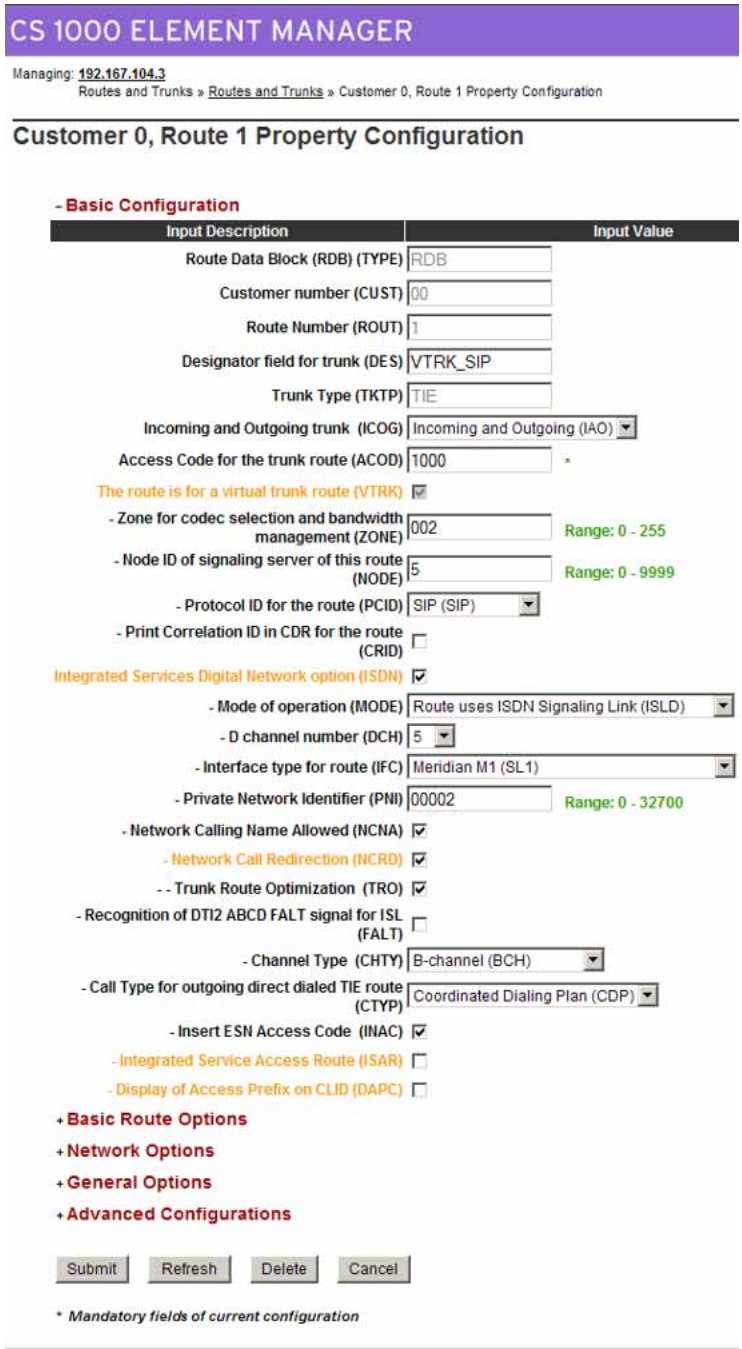
CS 1000 ELEMENT MANAGER
Managing: 192.167.104.3
Routes and Trunks » Routes and Trunks » Customer 0, Route 1 Property Configuration
Customer 0, Route 1 Property Configuration
- Basic Configuration
Input Description
Input Value
Route Data Block (RDB) (TYPE) RDB
Customer number (CUST) 00
Route Number (ROUT) 1
Designator field for trunk (DES) VTRK_SIP
Trunk Type (TKTP) TIE
Incoming and Outgoing trunk (ICOG) Incoming and Outgoing (IAO)
Access Code for the trunk route (ACOD) 1000 *
The route is for a virtual trunk route (VTRK)
- Zone for codec selection and bandwidth management (ZONE) 002 Range: 0 - 255
- Node ID of signaling server of this route (NODE) 5 Range: 0 - 9999
- Protocol ID for the route (PCID) SIP (SIP)
- Print Correlation ID in CDR for the route (CRID)
Integrated Services Digital Network option (ISDN)
- Mode of operation (MODE) Route uses ISDN Signaling Link (ISLD)
- D channel number (DCH) 5
- Interface type for route (IFC) Meridian M1 (SL1)
- Private Network Identifier (PNI) 00002 Range: 0 - 32700
- Network Calling Name Allowed (NCNA)
- Network Call Redirection (NCRD)
- - Trunk Route Optimization (TRO)
- Recognition of DTI2 ABCD FALT signal for ISL (FALT)
- Channel Type (CHTY) B-channel (BCH)
- Call Type for outgoing direct dialed TIE route (CTYP) Coordinated Dialing Plan (CDP)
- Insert ESN Access Code (INAC)
- Integrated Service Access Route (ISAR)
- Display of Access Prefix on CLID (DAPC)
+ Basic Route Options
+ Network Options
+ General Options
+ Advanced Configurations
Submit
Refresh
Delete
Cancel
* Mandatory fields of current configuration

4 Select the **Route Number (ROUT)**.

5 For **Designator field for trunk (DES)**, type a meaningful name.

Copyright © 2008, Nortel Networks

6 For **Trunk Type (TKTP)**, select **TIE trunk data block (TIE)**.

7 For **Incoming and Outgoing trunk (ICOG)**, select **Incoming and Outgoing (IAO)**.

8 Set the **Access Code for the trunk route (ACOD)**.

9 Select the **The route is for a virtual trunk route (VTRK)** check box.

10 Type the **Zone** number of the zone with the ZBRN set to Vtrk for the new route.
This value must match the values you configure in the Signaling Server.

11 Type the **Node ID of signaling server of this route (NODE)**.
This value must match the values you configure in the Signaling Server.

12 For **Protocol ID for the route (PCID)**, select **H323 (H323)**.

13 Select the **Integrated Services Digital Network option (ISDN)** check box.

14 For **Mode of operation (MODE)**, select **Route uses ISDN Signaling Link (ISLD)**.

15 Select the virtual **D channel number (DCH)**.

16 For **Interface type for route (IFC)**, select **Meridian M1 (SL1)**.

17 Leave the **Call Type for outgoing direct dialed TIE route (CTYP)** at the default value.
It is best to let NARS/BARS entries determine the NPI/TON for a number so that the route can be used for multiple call types.

18 Select the **Insert ESN Access Code (INAC)** check box.

19 Leave the other default values as is and click **Submit**.
The Routes and Trunks page appears showing the created routes.

—End—

Creating the virtual trunks (LD 14)

The Virtual Trunk TNs that you configure in this procedure cannot overlap with the ones that you configure for IP Phones.

Create separate virtual routes for SIP and H.323. The SIP route is configured in the procedure "Configuring IP networking for SIP" (page 59).

Copyright © 2008, Nortel Networks

Step	Action
1	Log on to Element Manager.
2	Select **Routes and Trunks > Routes and Trunks**.
3	Expand the **Customer** heading.
4	Click **Add trunk** next to the route to which you wish to add the trunk. The New Trunk Configuration page appears. See Figure 10 "New Trunk Configuration" (page 39). Your configuration determines the parameters available on this page.

Copyright © 2008, Nortel Networks

Figure 10
New Trunk Configuration

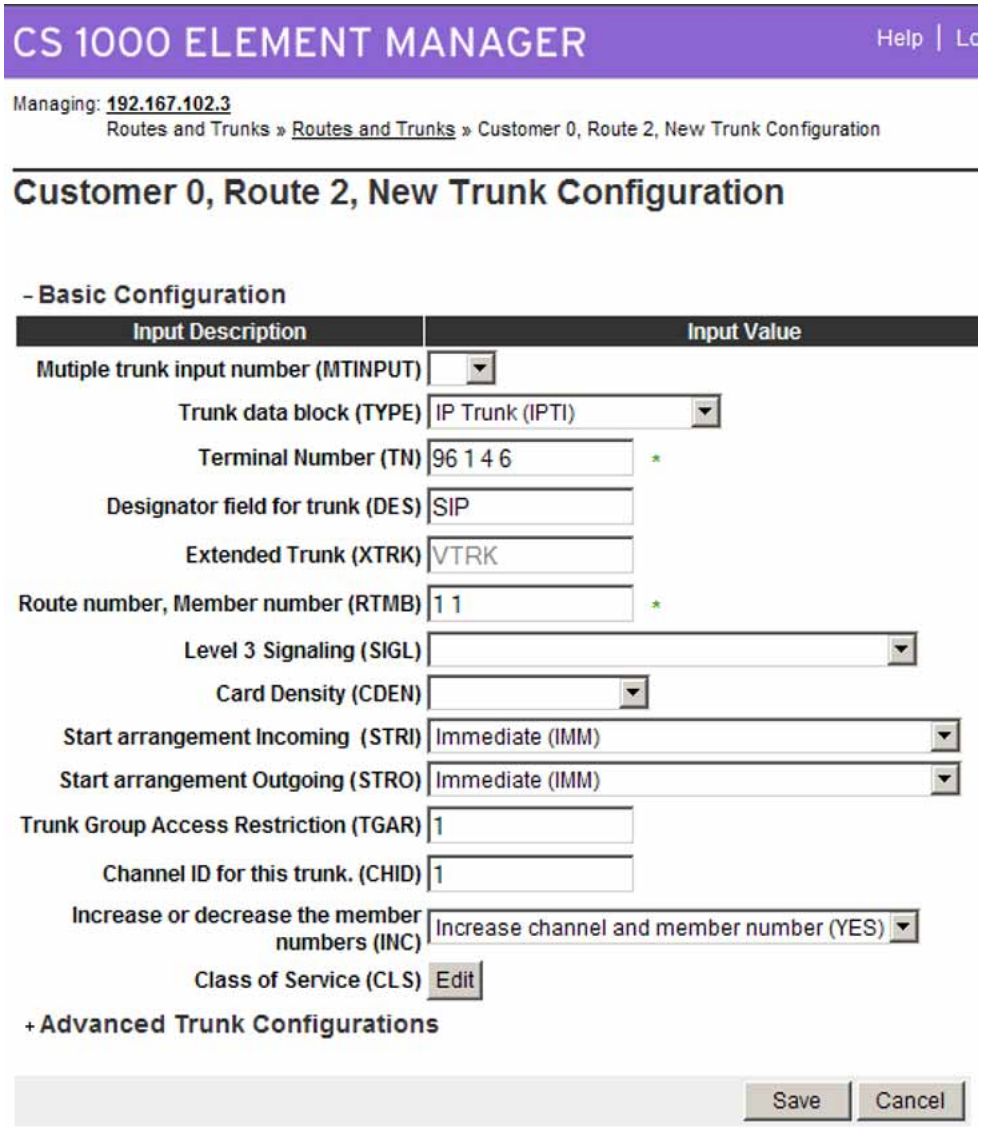

5 If you are configuring several trunks the same way, select the **Multiple trunk input number (MTINPUT)** (optional).

6 For **Trunk data block (TYPE)**, select **IP Trunk (IPTI)**.

7 Type the **Terminal Number (TN)** for the trunk.

8 For **Designator field for trunk (DES)**, type a meaningful value.

9 Type the **Route number, Member number (RTMB)** for the trunk.

Copyright © 2008, Nortel Networks

10 Set the values of **Start arrangement Incoming (STRI)** and **Start arrangement Outgoing (STRO)**.
Immediate (IMM) is recommended for both fields.

11 Type the **Channel ID for this trunk (CHID)**.

12 You can add a Class of Service (CLS) for all features that you wish. In a basic configuration, you can leave the CLS as is.

13 Select **Advanced Trunk Configurations** to display a list of advanced features.

14 Edit the necessary fields or accept the default values.

15 Click **Submit**.

—End—

Creating the ESN data block for CDP

Perform the following procedure to create the ESN data block for CDP.

Step	Action
1	Log on to Element Manager.
2	Select **Dialing and Numbering Plans > Electronic Switched Network**. The Electronic Switched Network page appears. See Figure 11 "Electronic Switched Network" (page 41).

Copyright © 2008, Nortel Networks

Figure 11
Electronic Switched Network

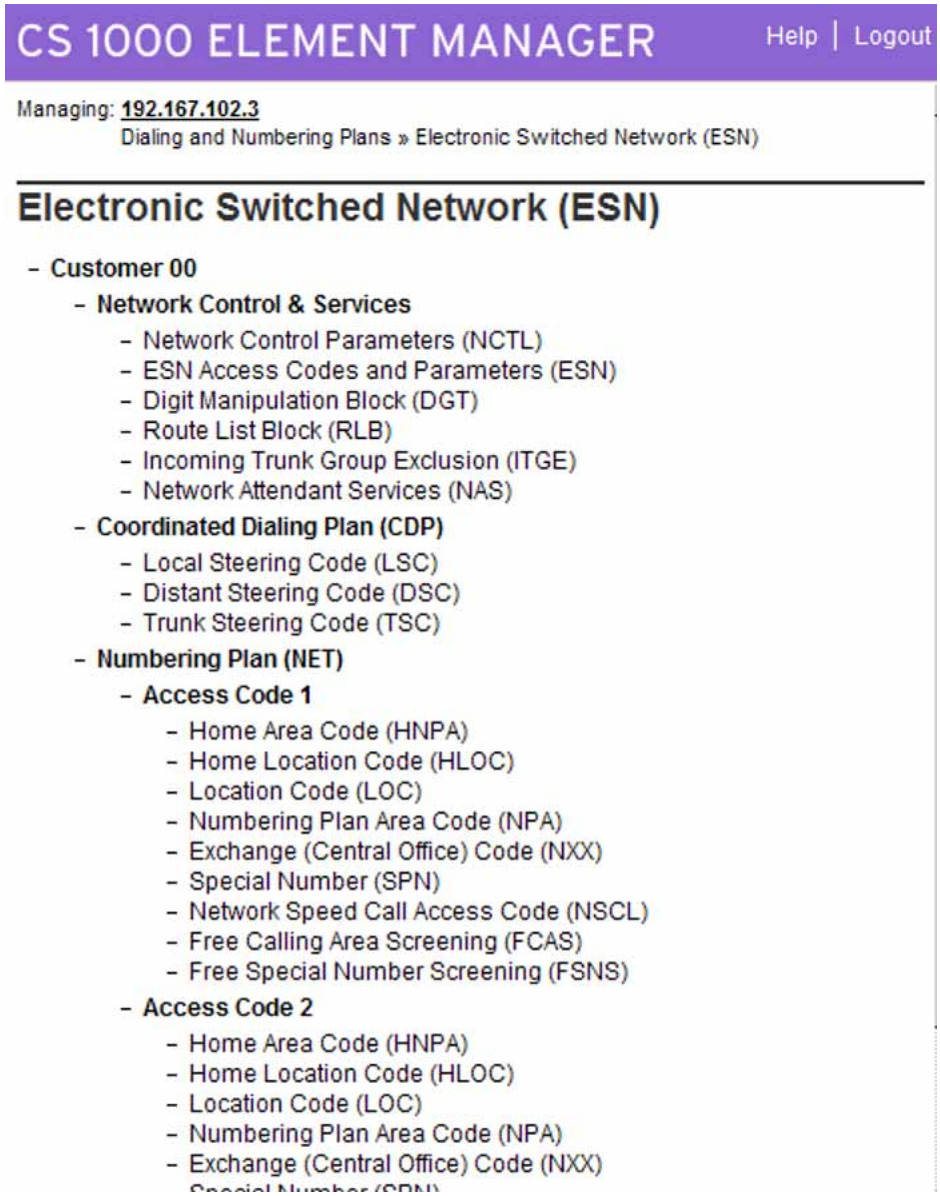
CS 1000 ELEMENT MANAGER
Help | Logout
Managing: 192.167.102.3
Dialing and Numbering Plans » Electronic Switched Network (ESN)
Electronic Switched Network (ESN)
- Customer 00
- Network Control & Services
- Network Control Parameters (NCTL)
- ESN Access Codes and Parameters (ESN)
- Digit Manipulation Block (DGT)
- Route List Block (RLB)
- Incoming Trunk Group Exclusion (ITGE)
- Network Attendant Services (NAS)
- Coordinated Dialing Plan (CDP)
- Local Steering Code (LSC)
- Distant Steering Code (DSC)
- Trunk Steering Code (TSC)
- Numbering Plan (NET)
- Access Code 1
- Home Area Code (HNPA)
- Home Location Code (HLOC)
- Location Code (LOC)
- Numbering Plan Area Code (NPA)
- Exchange (Central Office) Code (NXX)
- Special Number (SPN)
- Network Speed Call Access Code (NSCL)
- Free Calling Area Screening (FCAS)
- Free Special Number Screening (FSNS)
- Access Code 2
- Home Area Code (HNPA)
- Home Location Code (HLOC)
- Location Code (LOC)
- Numbering Plan Area Code (NPA)
- Exchange (Central Office) Code (NXX)

3 Select **Customer > Network Control & Services > ESN Access Codes and Parameters (ESN)**.

4 A message appears if ESN data is not configured. Click **OK**. The ESN Access Codes and Basic Parameters page appears. See Figure 12 "ESN Access Codes and Basic Parameters" (page 42). If ESN data is configured on your switch, the fields on this page appear populated.

Copyright © 2008, Nortel Networks

Figure 12
ESN Access Codes and Basic Parameters

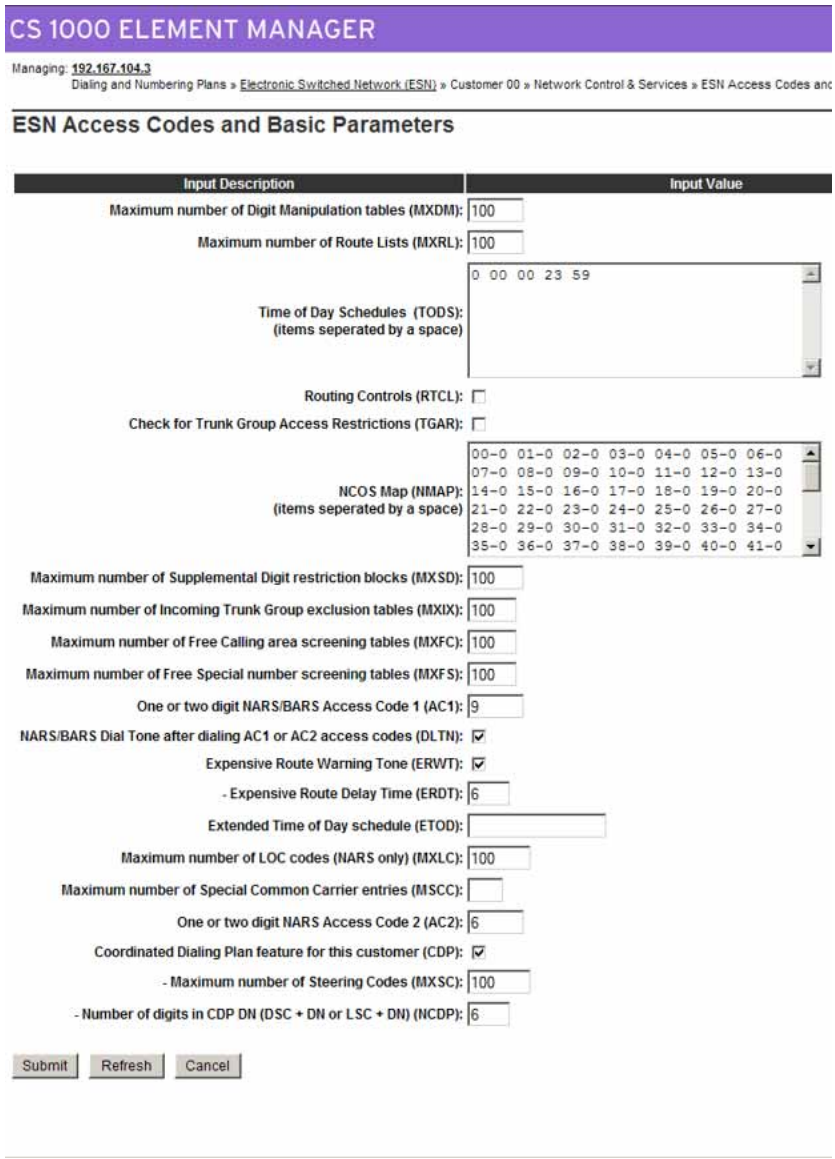
CS 1000 ELEMENT MANAGER
Managing: 192.167.104.3
Dialing and Numbering Plans » Electronic Switched Network (ESN) » Customer 00 » Network Control & Services » ESN Access Codes and
ESN Access Codes and Basic Parameters
Input Description
Input Value
Maximum number of Digit Manipulation tables (MXDM): 100
Maximum number of Route Lists (MXRL): 100
Time of Day Schedules (TODS): (items seperated by a space)
0 00 00 23 59
Routing Controls (RTCL):
Check for Trunk Group Access Restrictions (TGAR):
NCOS Map (NMAP): (items seperated by a space)
00-0 01-0 02-0 03-0 04-0 05-0 06-0
07-0 08-0 09-0 10-0 11-0 12-0 13-0
14-0 15-0 16-0 17-0 18-0 19-0 20-0
21-0 22-0 23-0 24-0 25-0 26-0 27-0
28-0 29-0 30-0 31-0 32-0 33-0 34-0
35-0 36-0 37-0 38-0 39-0 40-0 41-0
Maximum number of Supplemental Digit restriction blocks (MXSD): 100
Maximum number of Incoming Trunk Group exclusion tables (MXIX): 100
Maximum number of Free Calling area screening tables (MXFC): 100
Maximum number of Free Special number screening tables (MXFS): 100
One or two digit NARS/BARS Access Code 1 (AC1): 9
NARS/BARS Dial Tone after dialing AC1 or AC2 access codes (DLTN):
Expensive Route Warning Tone (ERWT):
- Expensive Route Delay Time (ERDT): 6
Extended Time of Day schedule (ETOD):
Maximum number of LOC codes (NARS only) (MXLC): 100
Maximum number of Special Common Carrier entries (MSCC):
One or two digit NARS Access Code 2 (AC2): 6
Coordinated Dialing Plan feature for this customer (CDP):
- Maximum number of Steering Codes (MXSC): 100
- Number of digits in CDP DN (DSC + DN or LSC + DN) (NCDP): 6
Submit
Refresh
Cancel

5 Edit the main parameters (**MXDM**, **MXRL**, **MXSD**, **MXIX**, **MXFC**, **MXFS** and **MXLC**) if required, or leave the default values as is.

6 Select the **Coordinated Dialing Plan feature for this customer (CDP)** check box.

7 Set the value of the **Maximum number of Steering Codes (MXSC)**.

8 Set the value of the **Number of digits in CDP DN (DSC+DN or LSC+DN) (NCDP)**.

Copyright © 2008, Nortel Networks

9 Click **Submit**.

—End—

Creating the Network Control Block (NCTL) for network access (LD 87)

Perform the following procedure to create the Network Control Block.

Step	Action
1	Log onto Element Manager.
2	Select **Dialing and Numbering Plans > Electronic Switched Network**.
3	Select **Customer > Network Control & Services > Network Control Parameters (NCTL)**. See Figure 11 "Electronic Switched Network" (page 41).
4	A message appears if no network control data is configured. Click **OK** to configure new data. The Network Control Parameters page appears. See Figure 13 "Network Control Parameters" (page 43).

Figure 13
Network Control Parameters

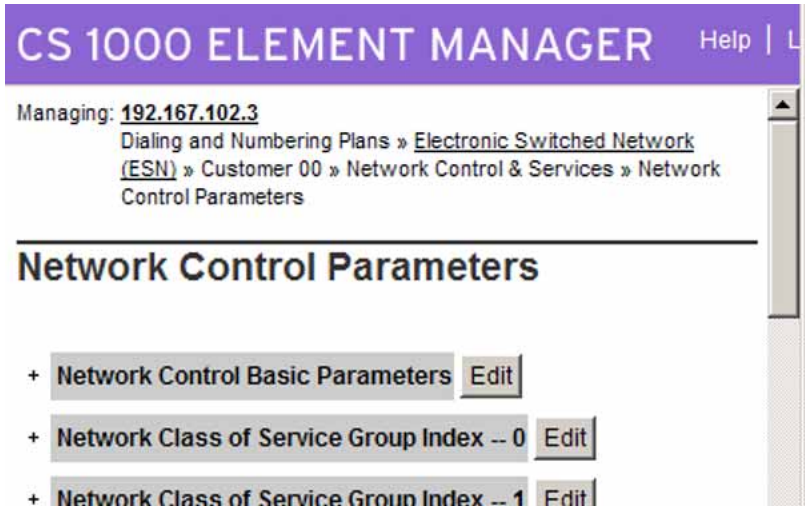
CS 1000 ELEMENT MANAGER
Help
Managing: 192.167.102.3
Dialing and Numbering Plans » Electronic Switched Network (ESN) » Customer 00 » Network Control & Services » Network Control Parameters
Network Control Parameters
+ Network Control Basic Parameters Edit
+ Network Class of Service Group Index -- 0 Edit
+ Network Class of Service Group Index -- 1 Edit

5 Click the **Edit** button next to Network Control Basic Parameters.
The Network Control Basic Parameters page appears. See Figure 14 "Network Control Basic Parameters" (page 44).

Copyright © 2008, Nortel Networks

Figure 14
Network Control Basic Parameters

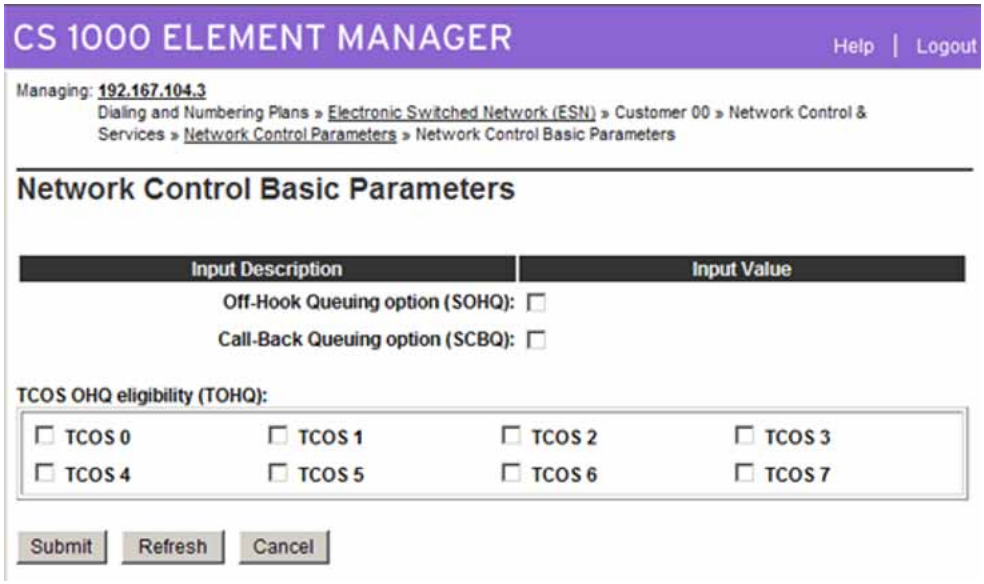

6 Choose the basic control parameters for your network.

7 Click **Submit**.

—End—

Creating the RLB for the virtual trunk route (LD 86)

Perform the following procedure to create the RLB for the virtual trunk route.

Step	Action
1	Log on to Element Manager.
2	Select **Dialing and Numbering Plans > Electronic Switched Network**.
3	Select **Customer > Network Control & Services > Route List Block (RLB)**. If route list blocks are not configured, the error message “Route List does not exist” appears. Click **OK**.
4	Type the **Route List Index number**.
5	Click **to Add**. The Route List Block Configuration page appears. See Figure 15 "Route List Block" (page 45).

Copyright © 2008, Nortel Networks

Figure 15
Route List Block

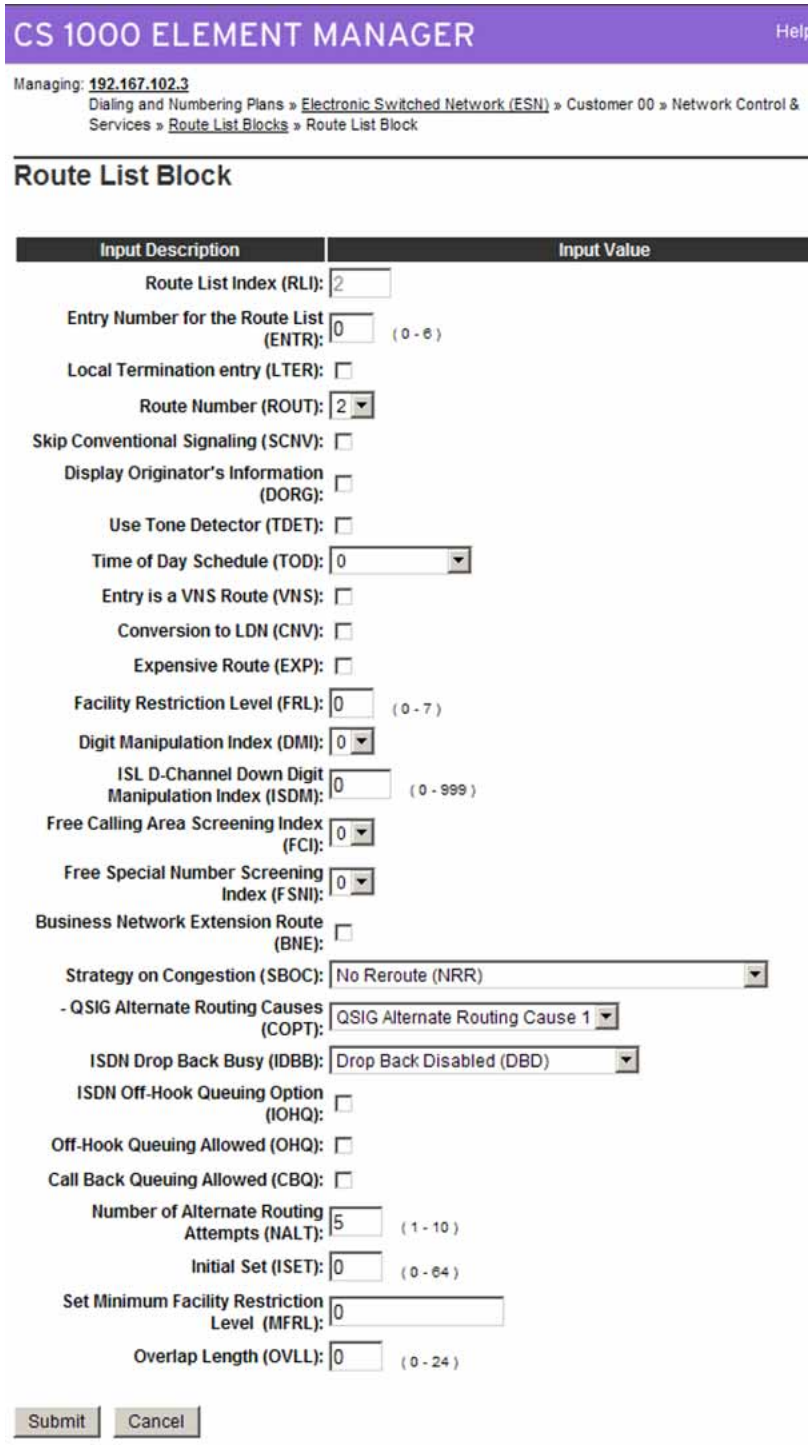
CS 1000 ELEMENT MANAGER
Help
Managing: 192.167.102.3
Dialing and Numbering Plans » Electronic Switched Network (ESN) » Customer 00 » Network Control & Services » Route List Blocks » Route List Block
Route List Block
Input Description
Input Value
Route List Index (RLI): 2
Entry Number for the Route List (ENTR): 0 (0 - 6)
Local Termination entry (LTER):
Route Number (ROUT): 2
Skip Conventional Signaling (SCNV):
Display Originator's Information (DORG):
Use Tone Detector (TDET):
Time of Day Schedule (TOD): 0
Entry is a VNS Route (VNS):
Conversion to LDN (CNV):
Expensive Route (EXP):
Facility Restriction Level (FRL): 0 (0 - 7)
Digit Manipulation Index (DMI): 0
ISL D-Channel Down Digit Manipulation Index (ISDM): 0 (0 - 999)
Free Calling Area Screening Index (FCI): 0
Free Special Number Screening Index (FSNI): 0
Business Network Extension Route (BNE):
Strategy on Congestion (SBOC): No Reroute (NRR)
- QSIG Alternate Routing Causes (COPT): QSIG Alternate Routing Cause 1
ISDN Drop Back Busy (IDBB): Drop Back Disabled (DBD)
ISDN Off-Hook Queuing Option (IOHQ):
Off-Hook Queuing Allowed (OHQ):
Call Back Queuing Allowed (CBQ):
Number of Alternate Routing Attempts (NALT): 5 (1 - 10)
Initial Set (ISET): 0 (0 - 64)
Set Minimum Facility Restriction Level (MFRL): 0
Overlap Length (OVLL): 0 (0 - 24)
Submit
Cancel

6 Select the **Route Number (ROUT)** you previously defined.

Copyright © 2008, Nortel Networks

7 For **Strategy on Congestion (SBOC)**, select **Reroute All (RRA)**.

8 Accept the other defaults and click **Submit**.
The new Route List Block is generated. You can check the configuration by selecting Route List Block Index and Data Entry Index.

—End—

Creating the CDP steering codes (LD 87)

Perform the following procedure to create the CDP steering codes.

Step	Action
1	Log on to Element Manager.
2	Select **Dialing and Numbering Plans > Electronic Switched Network**. The Electronic Switched Network page appears. See Figure 11 "Electronic Switched Network" (page 41).
3	Select **Customer > Coordinated Dialing Plan (CDP) > Distant Steering Code (DSC)**. The Distant Steering Code List page appears. See Figure 16 "Distant Steering Code List" (page 46).

Figure 16
Distant Steering Code List

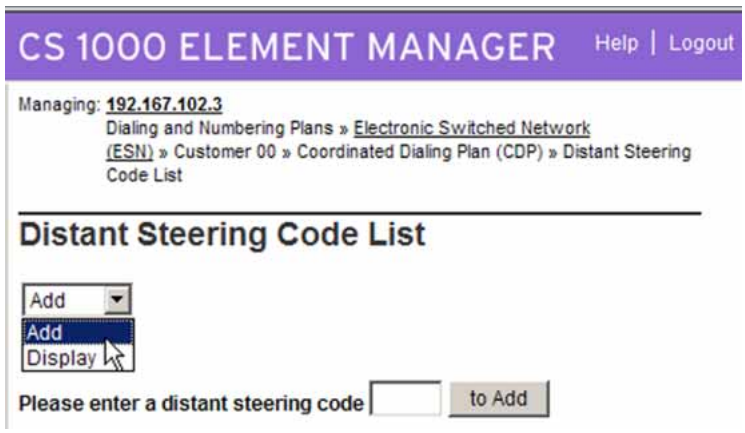
CS 1000 ELEMENT MANAGER
Help | Logout
Managing: 192.167.102.3
Dialing and Numbering Plans » Electronic Switched Network (ESN) » Customer 00 » Coordinated Dialing Plan (CDP) » Distant Steering Code List
Distant Steering Code List
Add
Add
Display
Please enter a distant steering code
to Add

4 Select **Add** to add a new Distant Steering Code.

5 Enter a **Distant Steering Code (DSC)**.
The Distant Steering Code is a unique identifier for remote switches or locations. Add a Distant Steering Code for all remote locations.

Copyright © 2008, Nortel Networks

6 Click **to Add**.
The Distant Steering Code page appears. See Figure 17 "Distant Steering Code" (page 47).

Figure 17
Distant Steering Code

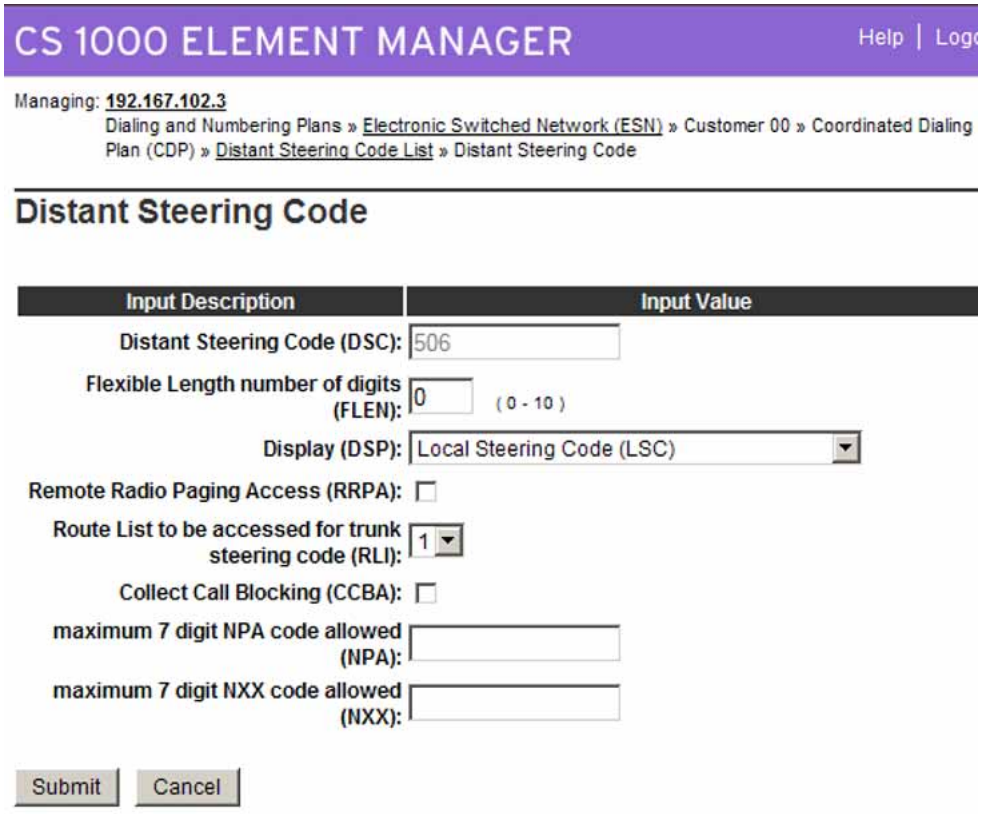
CS 1000 ELEMENT MANAGER
Help | Logo
Managing: 192.167.102.3
Dialing and Numbering Plans » Electronic Switched Network (ESN) » Customer 00 » Coordinated Dialing Plan (CDP) » Distant Steering Code List » Distant Steering Code
Distant Steering Code
Input Description
Input Value
Distant Steering Code (DSC): 506
Flexible Length number of digits (FLEN): 0 (0 - 10)
Display (DSP): Local Steering Code (LSC)
Remote Radio Paging Access (RRPA):
Route List to be accessed for trunk steering code (RLI): 1
Collect Call Blocking (CCBA):
maximum 7 digit NPA code allowed (NPA):
maximum 7 digit NXX code allowed (NXX):
Submit
Cancel

7 Check that the parameters are configured appropriately for your system.

8 Select a **Route list to be accessed for trunk steering code (RLI)**.

9 Click **Submit**.

10 Repeat this procedure for all other DSCs on your network.

—End—

Checking CODEC and QoS settings

At this point, the Call Server configuration is complete. It is recommended that you check the CODEC and QoS settings.

Copyright © 2008, Nortel Networks

Step	Action
1	Log on to Element Manager.
2	Select **System > IP Network > Nodes: Servers, Media Cards**. See Figure 18 "Node Configuration" (page 48).

Figure 18
Node Configuration

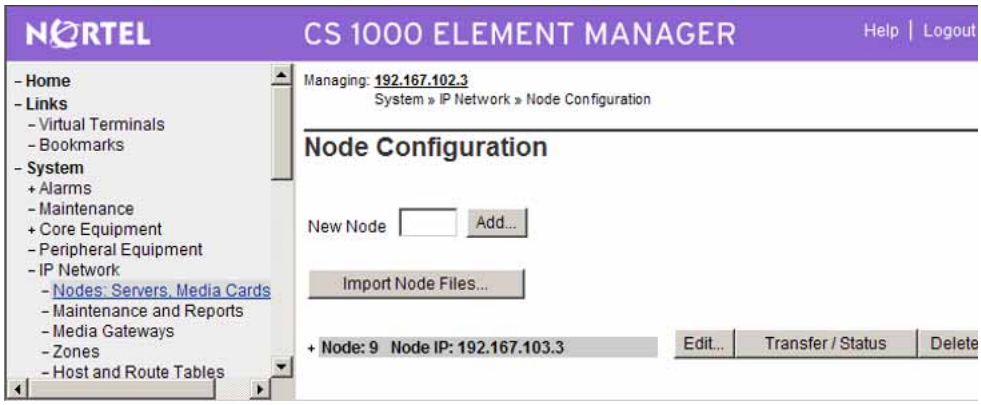

3	Click **Edit**.
4	Expand the **VGW and IP phone codec profile** heading and edit the fields as necessary. See Figure 19 "VGW and IP phone codec profile" (page 49).

Copyright © 2008, Nortel Networks

Figure 19
VGW and IP phone codec profile

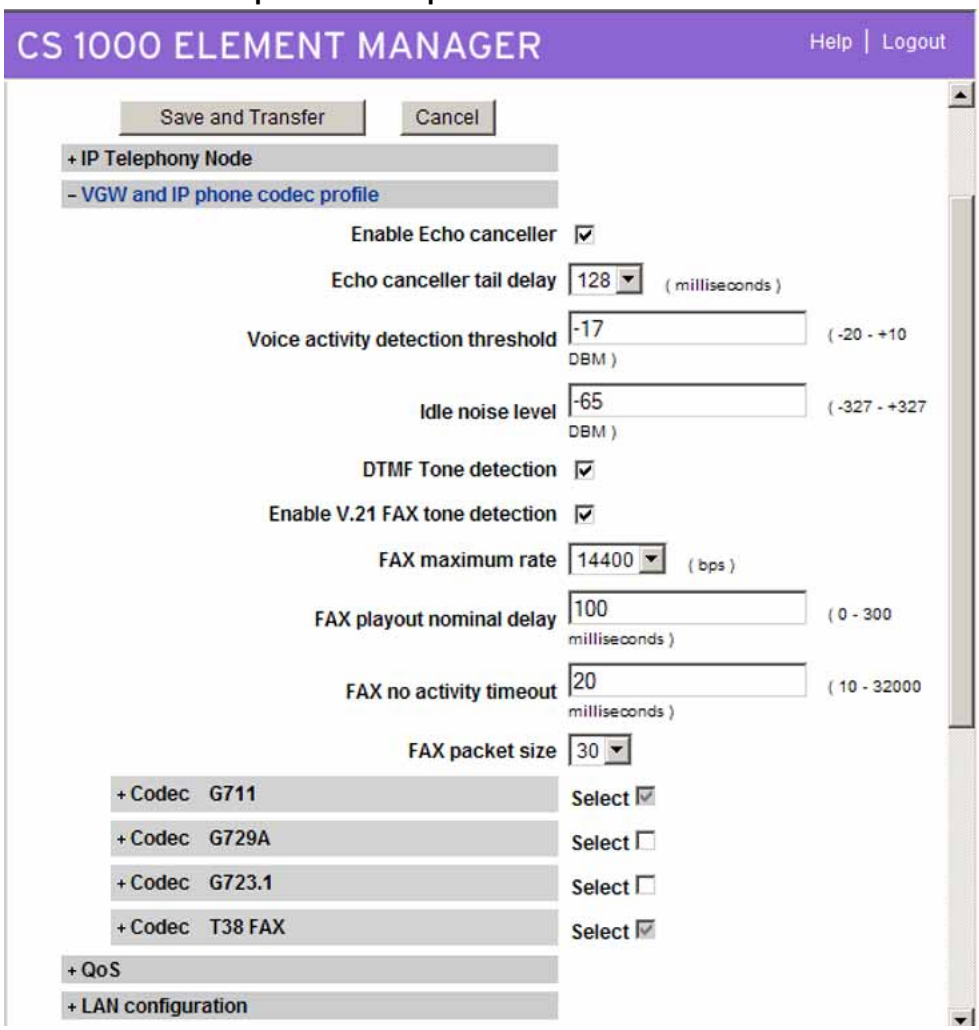

5 Expand the **QoS** heading and edit the fields as necessary. See Figure 20 "QoS" (page 50).

Copyright © 2008, Nortel Networks

Figure 20
QoS

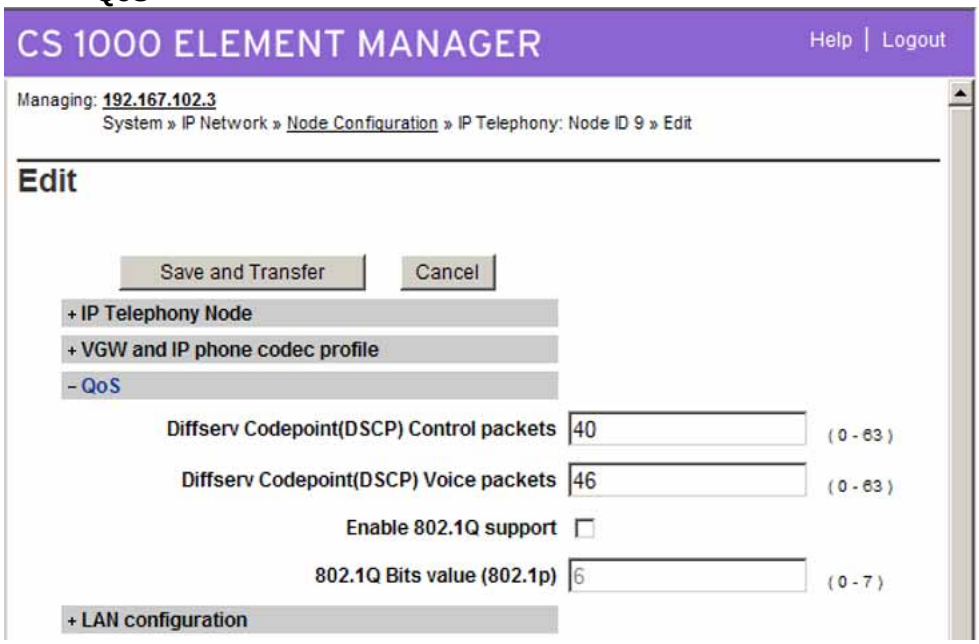

6 If you make configuration changes, click **Save and Transfer**. When the successful transfer notification message appears, click **OK**.
If you do not make configuration changes, click **Cancel**.

—End—

H.323 Gatekeeper configuration

Configure the H.323 Gatekeeper in both Element Manager and the NRS. Configure the Element Manager before the NRS.

The sequence of H.323 Gatekeeper configuration procedures is as follows:

- "Configuring Element Manager" (page 50)

Configuring Element Manager

Set the Primary and Alternate Gatekeeper IP addresses. This IP address is configured at each H.323 Gateway (Signaling Server).

Step	Action
1	Log on to Element Manager.
2	Select **System > IP Network > Nodes:Servers, Media Cards**. See Figure 18 "Node Configuration" (page 48).

Copyright © 2008, Nortel Networks

3 Click **Edit** next to the node you are configuring.

4 Expand the **H.323 GW Settings** heading.
See Figure 21 "H323 Gateway and Signaling Server" (page 51).

Figure 21
H323 Gateway and Signaling Server

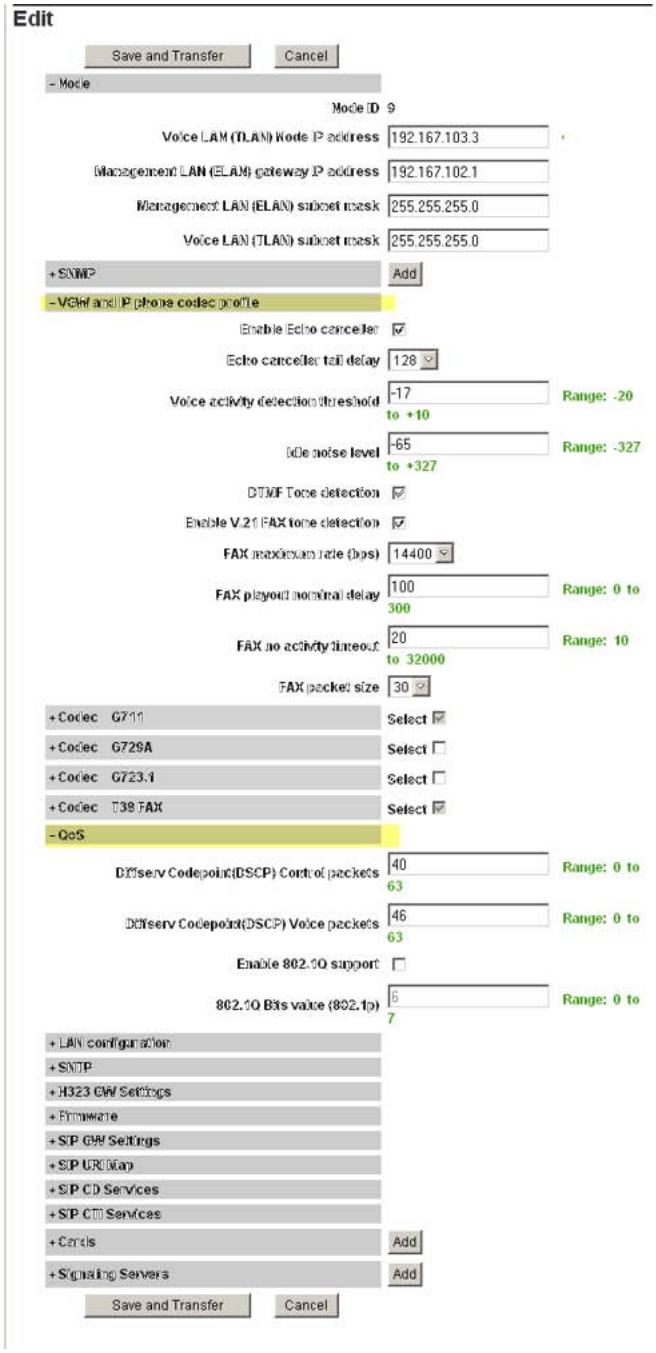

Copyright © 2008, Nortel Networks

5 Enter the **Primary Gatekeeper (TLAN) IP address**.
This is the T-LAN IP address of the Signaling Server that runs the Gatekeeper application. This is not the same as the Node IP.

6 Enter the **Alternate Gatekeeper (TLAN) IP address** if you have an alternate on your system (optional).

7 Expand the **Signaling Servers** heading.

8 Expand the **Signaling Server Properties** heading at the bottom of the page.

9 Enter the **H323 ID**.
This should be the same as the Signaling Server that hosts the Primary H.323 Gatekeeper. Make a note of the H323 ID for the NRS configuration.
The host name does not need to be the same as the H323 ID, but it is recommended that both names are the same.

10 Select the **Enable Gatekeeper** check box.

11 If you make configuration changes, click **Save and Transfer**. When the successful transfer notification message appears, click **OK**.
If you do not make configuration changes, click **Cancel**.

—End—

SIP protocol configuration

The procedures in this section are as follows:

- "Enabling the SIP Virtual Trunk application" (page 53)
- "Configuring the SIP Gateway" (page 55)
- "Configuring the SIP Redirect Server and URI map" (page 57)
- "Configuring IP networking for SIP" (page 59)
  - "Defining the customer to support ISDN" (page 59)
  - "Creating the virtual D-channel" (page 62)
  - "Configuring zones (LD 117)" (page 65)"Creating the virtual route (LD 16)" (page 67)
  - "Creating the virtual trunks (LD 14)" (page 70)
  - "Creating the ESN data block for CDP" (page 73)
  - "Creating the Network Control Block (NCTL) for network access (LD 87)" (page 76)

Copyright © 2008, Nortel Networks

— "Creating the RLB for the virtual trunk route (LD 86)" (page 77)"Creating the CDP steering codes (LD 87)" (page 79)

— "Checking CODEC and QoS settings" (page 81)

Configuration for the SIP protocol is very similar to that of the Call Server.

If you select YES at the CRID prompt, a new line (SIP message) is added to the end of the Call Detail Record. This message shows the SIP addressing scheme.

The SIP Gateway also supports H.323 Gateway functionality so that both Gateways can interoperate. Also, you can point the virtual trunks, whether they are H.323 or SIP, to the same node ID on the signaling server. Then, the signaling server can perform the signaling for both protocols.

Enabling the SIP Virtual Trunk application

Perform the following procedure to enable SIP functionality in Element Manager. You must reboot the system during this procedure.

Step	Action
1	Log on to Element Manager.
2	Select **System > IP Network > Nodes: Servers, Media Cards**. See Figure 18 "Node Configuration" (page 48).
3	Click **Edit** next to the node you are editing.
4	Expand the **Signaling Servers** heading.
5	Expand the **Signaling Server Properties** heading. SeeFigure 22 "Signaling Server Properties" (page 54) .

Copyright © 2008, Nortel Networks

Figure 22
Signaling Server Properties

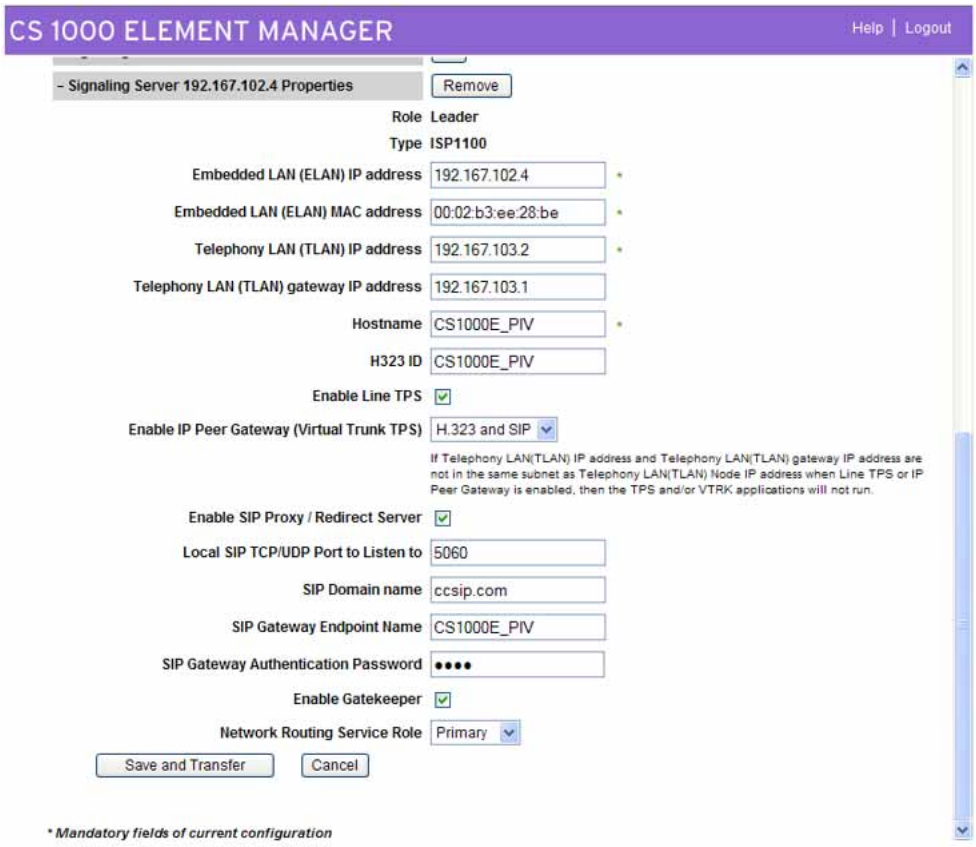
CS 1000 ELEMENT MANAGER
Help | Logout
- Signaling Server 192.167.102.4 Properties
Remove
Role Leader
Type ISP1100
Embedded LAN (ELAN) IP address 192.167.102.4
Embedded LAN (ELAN) MAC address 00:02:b3:ee:28:be
Telephony LAN (TLAN) IP address 192.167.103.2
Telephony LAN (TLAN) gateway IP address 192.167.103.1
Hostname CS1000E_PIV
H323 ID CS1000E_PIV
Enable Line TPS
Enable IP Peer Gateway (Virtual Trunk TPS) H.323 and SIP
If Telephony LAN(TLAN) IP address and Telephony LAN(TLAN) gateway IP address are not in the same subnet as Telephony LAN(TLAN) Node IP address when Line TPS or IP Peer Gateway is enabled, then the TPS and/or VTRK applications will not run.
Enable SIP Proxy / Redirect Server
Local SIP TCP/UDP Port to Listen to 5060
SIP Domain name ccsip.com
SIP Gateway Endpoint Name CS1000E_PIV
SIP Gateway Authentication Password ••••
Enable Gatekeeper
Network Routing Service Role Primary
Save and Transfer
Cancel
* Mandatory fields of current configuration

6 For **Enable IP Peer Gateway (Virtual Trunk TPS)**, select a SIP option (**SIP only** or **H.323 and SIP**).

7 Select the **Enable SIP Proxy/Redirect Server** check box.

8 Check that **Local SIP TCP/UDP Port to Listen to** is set appropriately.
The default is 5060.

9 Enter the **SIP Domain name**.
The SIP Domain Name must be less than 128 characters in length. Valid characters are a-z, 0-9, period, hyphen, comma, and underscore.
This string builds all SIP messages and appears in the URI phone context. If you enable the SIP Gateway application, specify this field. This name must match the Service Domain name configured in NRS.

10 Enter the **SIP Gateway Endpoint Name** and **SIP Gateway Authentication Password**.

Copyright © 2008, Nortel Networks

These values must match the data in NRS. The SIP Gateway Endpoint Name becomes the Gateway's user ID.

11 If you make configuration changes, click **Save and Transfer**. When the successful transfer notification message appears, click **OK**.
If you do not make configuration changes, click **Cancel**.

—End—

Configuring the SIP Gateway

Before you configure the SIP Gateway, check which route is configured as a SIP route in LD 16. You must configure this route later.

Step	Action
1	Log on to Element Manager.
2	Select **System > IP Network > Nodes: Servers, Media Cards**. See Figure 18 "Node Configuration" (page 48).
3	Click the **Edit** button next to the node you are configuring.
4	Expand the **SIP GW Settings** heading. See Figure 23 "SIP GW settings" (page 56).

Copyright © 2008, Nortel Networks

Figure 23
SIP GW settings

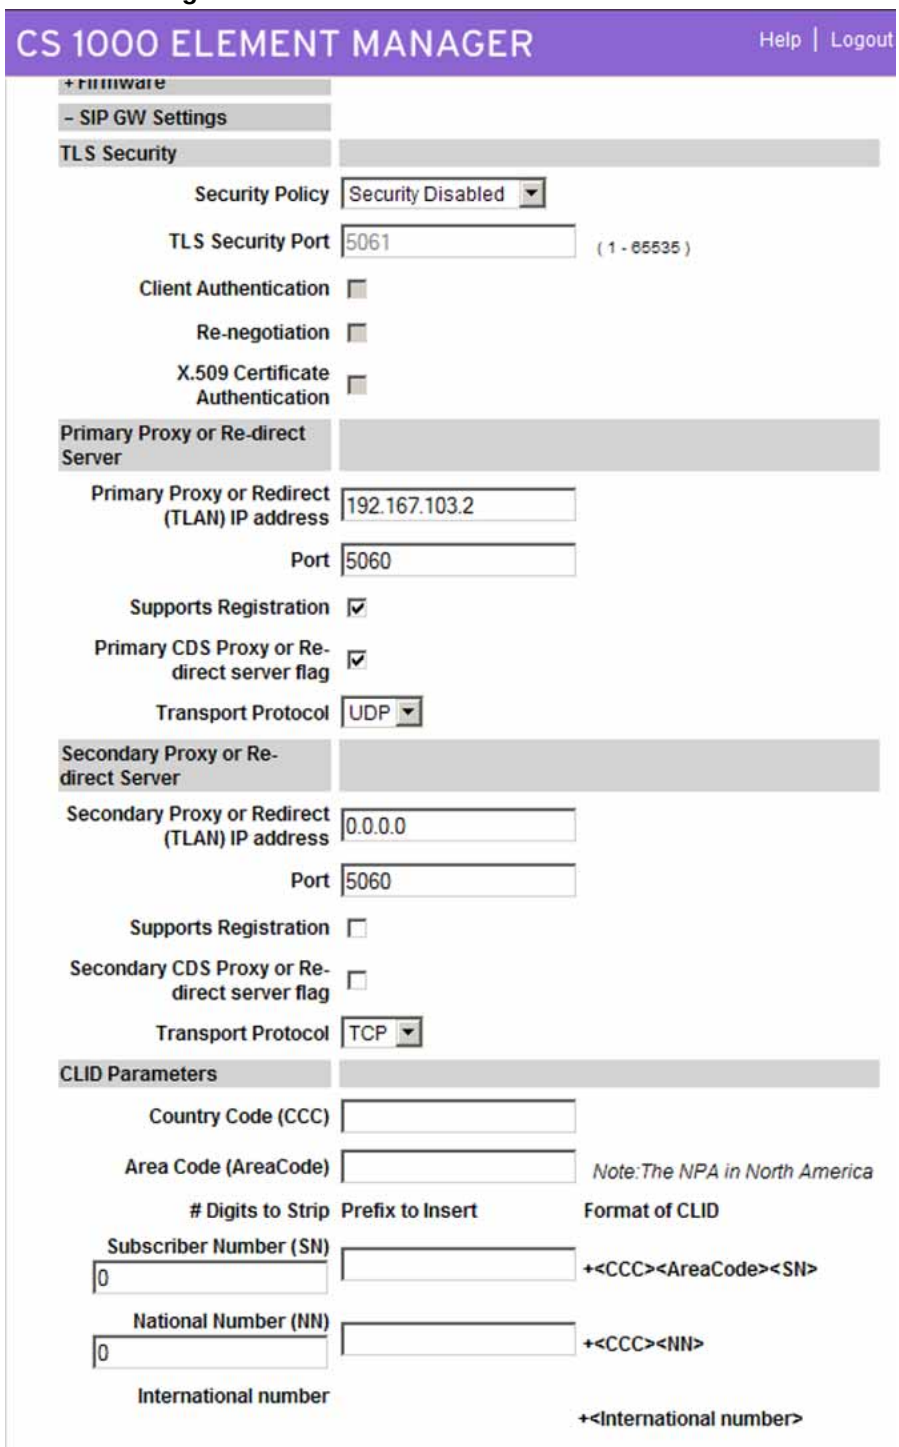

Copyright © 2008, Nortel Networks

5 In the Primary Proxy or Redirect Server section, type the **Primary Proxy or Re-direct (TLAN) IP address**.

6 In the Primary Proxy or Redirect Server section, type the **Port** number. The default port value is 5060.

7 Select the **Supports Registration** check box.

8 Select the **Transport Protocol**.

9 If you plan to configure a secondary or redundant proxy server, repeat steps 6 through 9 for the Secondary Proxy or Re-direct Server section.

10 If you make configuration changes, click **Save and Transfer**. When the successful transfer notification message appears, click **OK**.
If you do not make configuration changes, click **Cancel**.

—End—

Configuring the SIP Redirect Server and URI map

Use this procedure to configure your SIP numbering plan mapping. You can use this mapping to interpret TON/NPI numbers and map them to the associated context (to or from SIP). The TON/NPI field explicitly maps to the SIP phone-context attribute in the URI address.

Step	Action
1	Log on to Element Manager.
2	Select **System > IP Network > Nodes:Servers, Media Cards**.
3	Click the **Edit** button beside the node to be edited.
4	Expand the **SIP URI Map** heading. See Figure 24 "Edit SIP URI Map" (page 58).

Copyright © 2008, Nortel Networks

Figure 24
Edit SIP URI Map

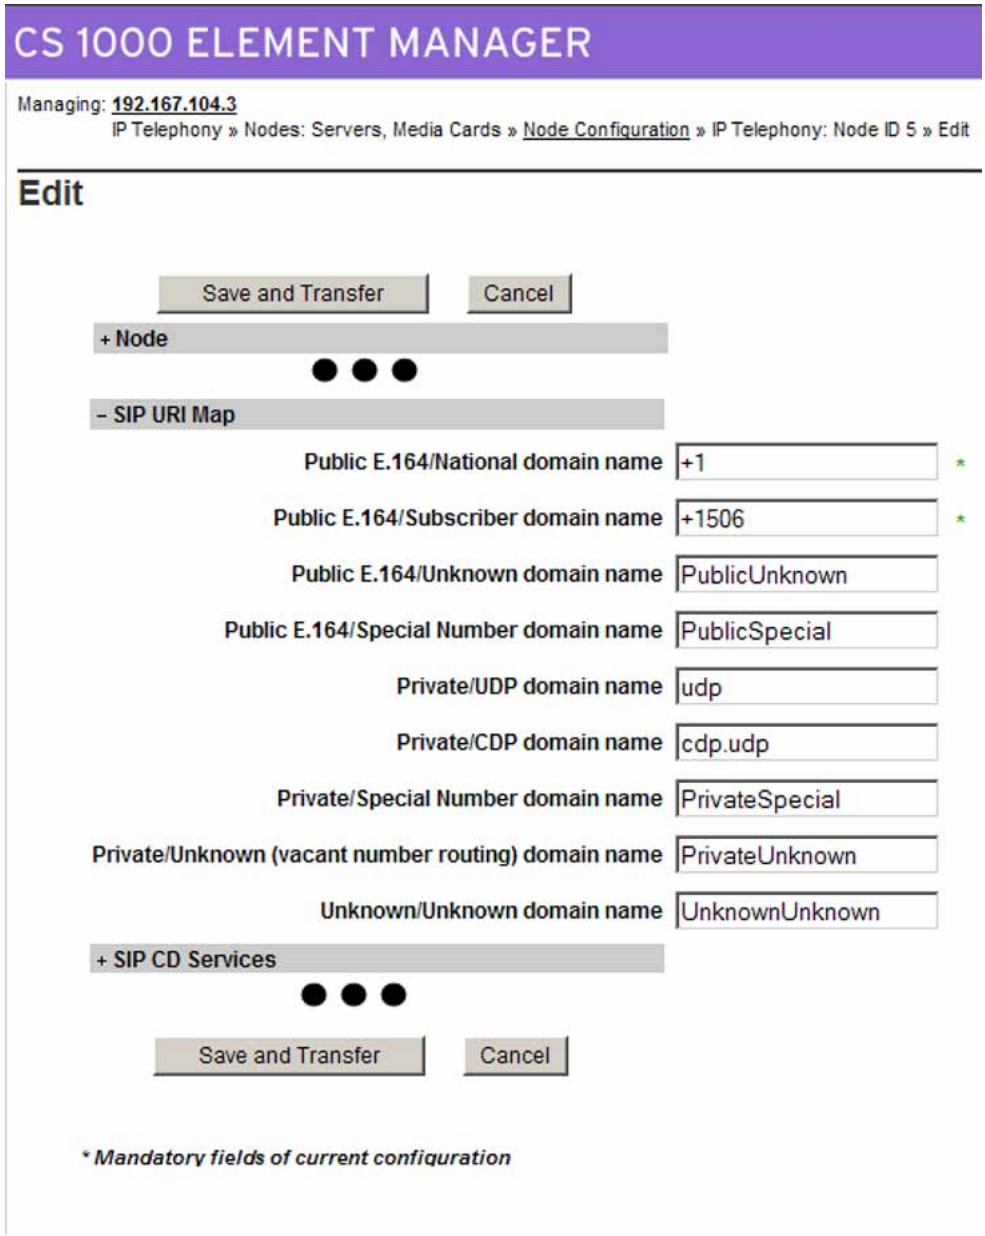

5 For **Private/UDP domain name**, type the L1 domain.

6 For **Private/CDP domain name**, type the L0 and L1 domains in the format <L0 domain.L1 domain>.

7 Enter the values for your SIP numbering plan in the appropriate fields.

Copyright © 2008, Nortel Networks

8 Click **Save and Transfer**.

9 Click **OK** when the system is done transferring data and the successful transfer message appears.

—End—

Configuring IP networking for SIP

The IP Peer Networking configuration for SIP in the Call Server is similar to the H.323 configuration. For each Call Server in the IP Peer Network, perform the following tasks:

1. Define the customer to support ISDN (LD 15).
2. Create the virtual D-channel (LD 17).
3. Configure the zones (LD 117).
4. Create the virtual route (LD 16).
   Enter **SIP** in the VTRK page.
5. Create the virtual trunk.
6. Create the ESN data block for CDP (LD 86).
7. Create the Network Control (NCTL) block for network access (LD 87).
8. Create the RLB that uses the virtual trunk route (LD 86).
9. Create the CDP steering codes (LD 87).

If the system is already configured for H.323, you do not need to perform steps 1, 2, 3, 6, and 7 again.

Defining the customer to support ISDN

Complete the following procedure to define the customer to support ISDN.

Step	Action
1	Log on to Element Manager.
2	Select **Customers**.
3	Select the **Customer Number** you wish to edit. The Customer Edit page appears. See Figure 3 "Customer Edit" (page 28).

Copyright © 2008, Nortel Networks

Figure 25
Customer Edit

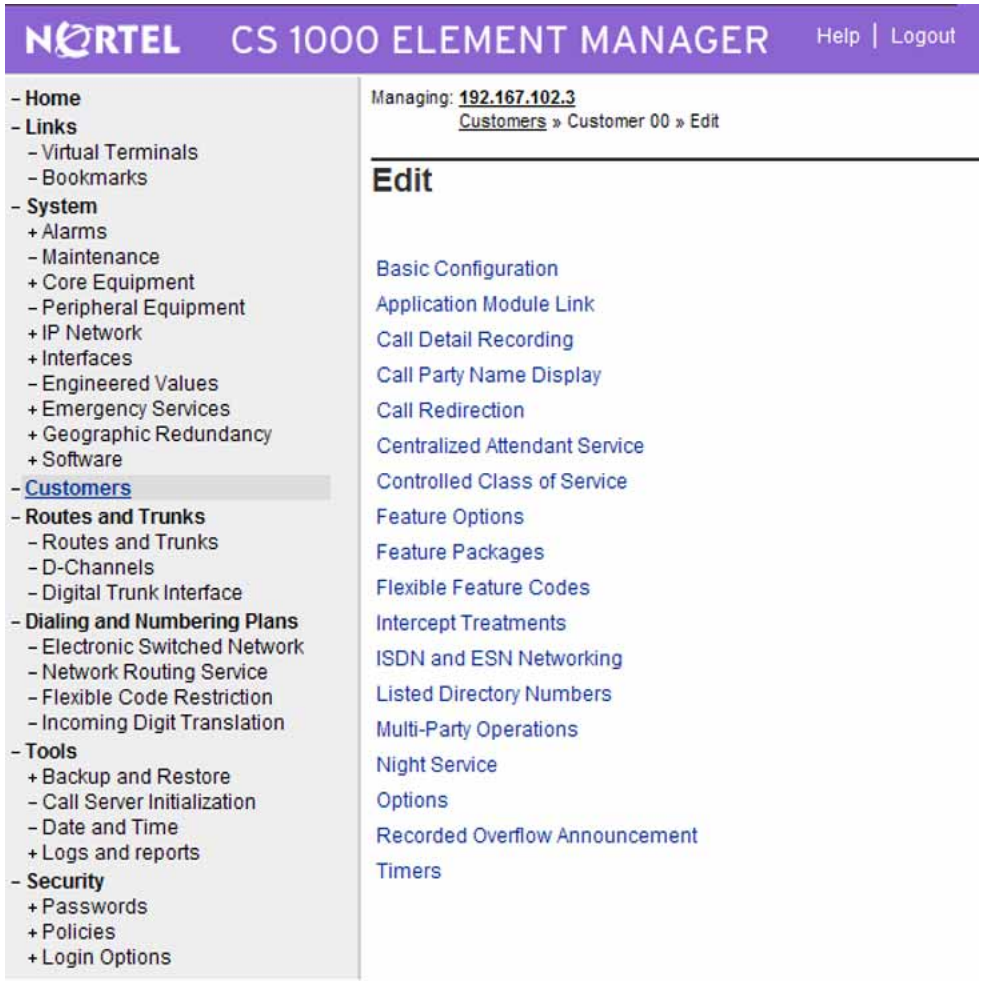

4 Select the **Feature Packages** heading.
The Feature Packages page appears. See Figure 26 "Feature Packages" (page 61).

Copyright © 2008, Nortel Networks

Figure 26
Feature Packages

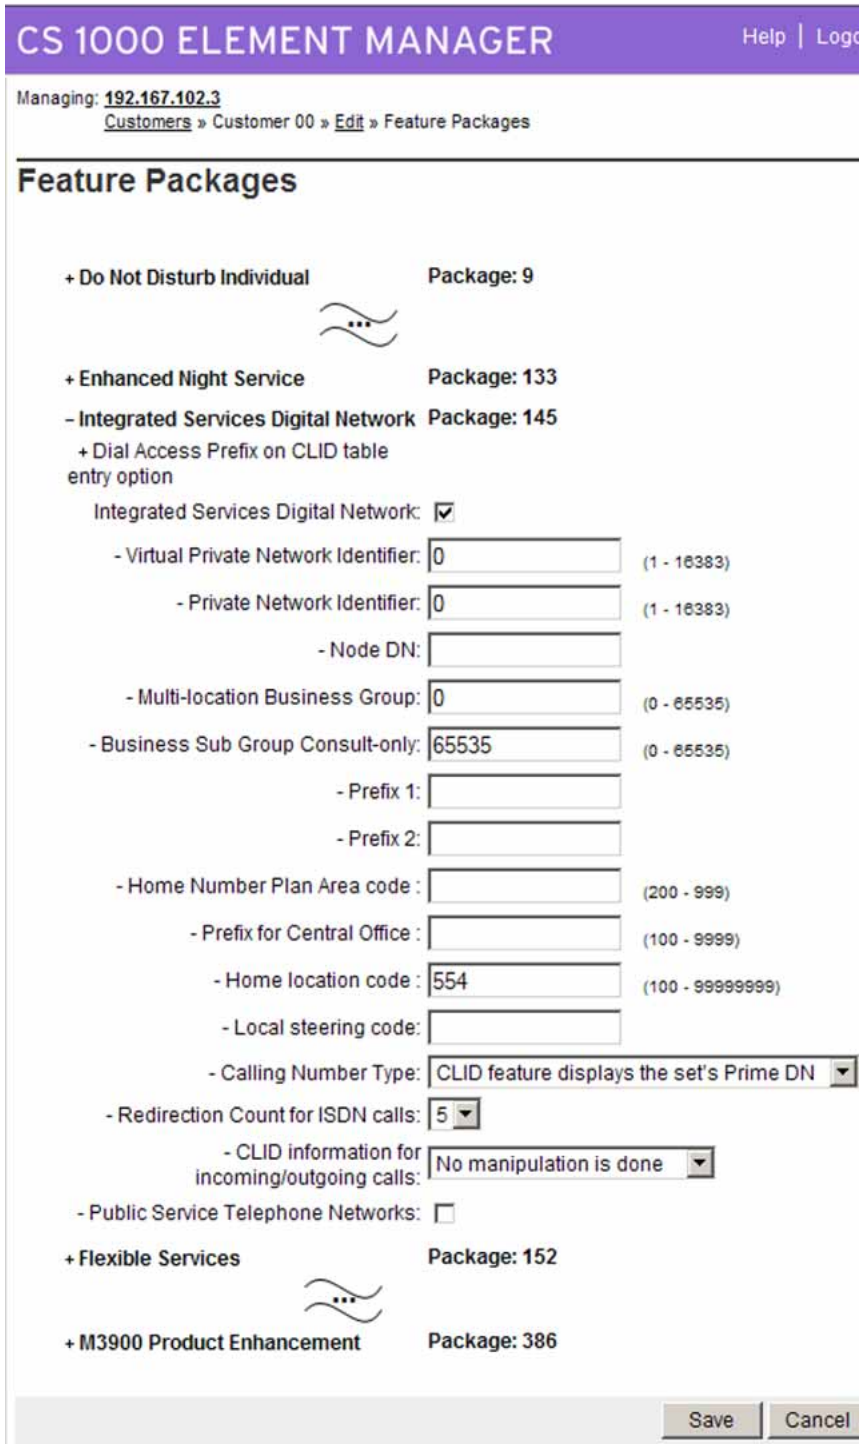
CS 1000 ELEMENT MANAGER
Help | Logo
Managing: 192.167.102.3
Customers » Customer 00 » Edit » Feature Packages
Feature Packages
+ Do Not Disturb Individual
Package: 9
+ Enhanced Night Service
Package: 133
– Integrated Services Digital Network
Package: 145
+ Dial Access Prefix on CLID table entry option
Integrated Services Digital Network:
- Virtual Private Network Identifier: 0 (1 - 16383)
- Private Network Identifier: 0 (1 - 16383)
- Node DN:
- Multi-location Business Group: 0 (0 - 65535)
- Business Sub Group Consult-only: 65535 (0 - 65535)
- Prefix 1:
- Prefix 2:
- Home Number Plan Area code : (200 - 999)
- Prefix for Central Office : (100 - 9999)
- Home location code : 554 (100 - 99999999)
- Local steering code:
- Calling Number Type: CLID feature displays the set's Prime DN
- Redirection Count for ISDN calls: 5
- CLID information for incoming/outgoing calls: No manipulation is done
- Public Service Telephone Networks:
+ Flexible Services
Package: 152
+ M3900 Product Enhancement
Package: 386
Save
Cancel

Copyright © 2008, Nortel Networks

5 Expand the **Integrated Services Digital Network Package 145** heading.

6 Ensure that the **Integrated Services Digital Network** check box is selected.

7 Click **Save**.

—End—

Creating the virtual D-channel

Perform the following procedure to create the virtual D-channel.

Step	Action
1	Log on to Element Manager.
2	Select **Routes and Trunks > D-Channels**. The D-Channels page appears. See Figure 5 "D-Channels" (page 30). A message appears if a D-channel is not configured. Click **OK**.

Copyright © 2008, Nortel Networks

Figure 27
D-Channels

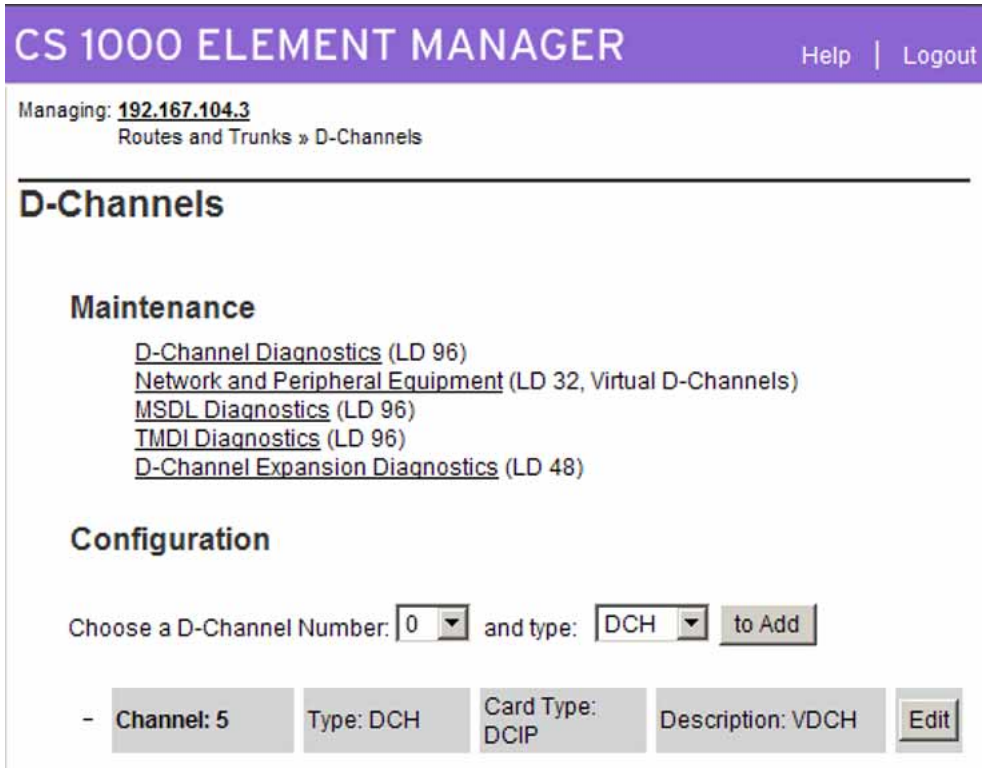
CS 1000 ELEMENT MANAGER
Help | Logout
Managing: 192.167.104.3
Routes and Trunks » D-Channels
D-Channels
Maintenance
D-Channel Diagnostics (LD 96)
Network and Peripheral Equipment (LD 32, Virtual D-Channels)
MSDL Diagnostics (LD 96)
TMDI Diagnostics (LD 96)
D-Channel Expansion Diagnostics (LD 48)
Configuration
Choose a D-Channel Number: 0 and type: DCH to Add
- Channel: 5 Type: DCH Card Type: DCIP Description: VDCH Edit

3 From the **Choose a D-Channel Number** menu, select the D-Channel number.
D-channels 0,1, and 2 are usually used or shared with other applications. It is recommended that you begin configuring virtual D-channels on channel 3.

4 From the **Type** menu, select the D-Channel type.

5 Click **to Add**.
The D-Channels Property Configuration page appears. See Figure 6 "D-Channels Property Configuration" (page 31).

Copyright © 2008, Nortel Networks

Figure 28
D-Channels Property Configuration

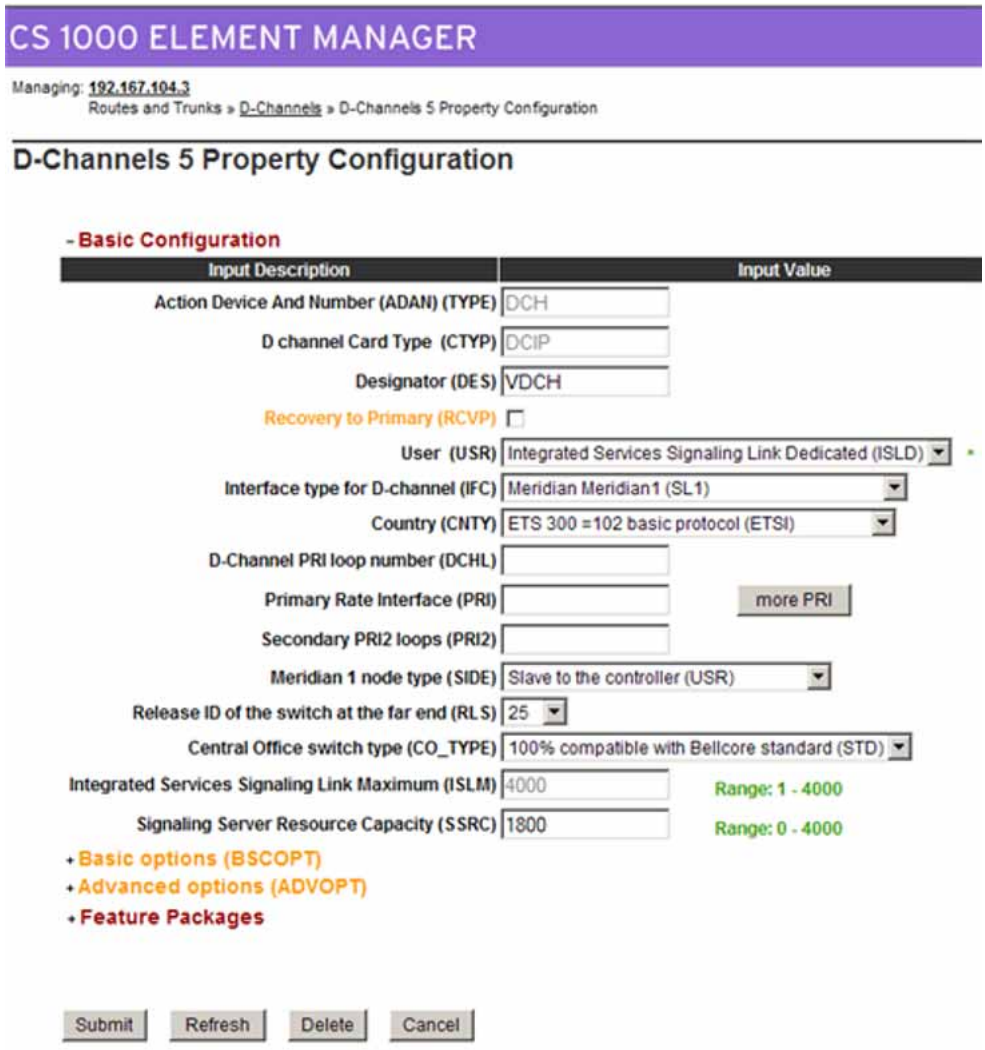

6 For the **D channel Card Type (CTYP)**, select **D-channel is over IP (DCIP)**.

7 For the **Designator (DES)**, type a meaningful name.
The Designator must not contain spaces; use underscores instead. Make a note of the Designator in your records for future reference.

8 For **User (USR)**, select **Integrated Services Signaling Link Dedicated (ISLD)**.

9 For **Interface type for D-channel (IFC)**, select **Meridian Meridian1 (SL1)**.

Copyright © 2008, Nortel Networks

10 Leave all other parameters as is and click **Submit**.
The new channel appears.

—End—

Configuring zones (LD 117)

Before you can configure the virtual routes and trunks, the following zones must be configured, in any order:

- Zone 1 = IP Phones zone (ZBRN = MO)
- Zone 2 = Voice Gateway Channels zone, which should be different from the IP Phones zone (ZBRN = VTRK)

Ensure that enough bandwidth is allocated for the zones with the heaviest traffic.

Never use or configure zone 0.

Step	Action
1	Log on to Element Manager.
2	Select **System > IP Network > Zones**. See Figure 7 "Zones" (page 33).

Copyright © 2008, Nortel Networks

Figure 29
Zones

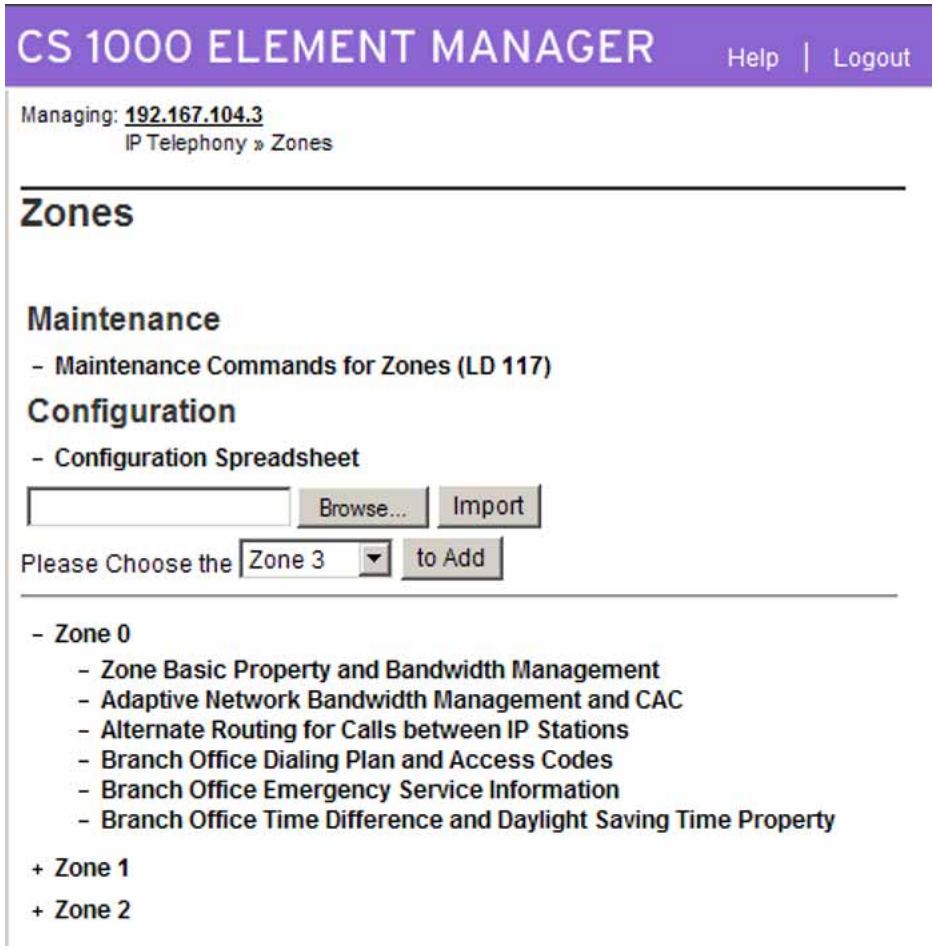
CS 1000 ELEMENT MANAGER
Help | Logout
Managing: 192.167.104.3
IP Telephony » Zones
Zones
Maintenance
- Maintenance Commands for Zones (LD 117)
Configuration
- Configuration Spreadsheet
Browse...
Import
Please Choose the Zone 3
to Add
- Zone 0
- Zone Basic Property and Bandwidth Management
- Adaptive Network Bandwidth Management and CAC
- Alternate Routing for Calls between IP Stations
- Branch Office Dialing Plan and Access Codes
- Branch Office Emergency Service Information
- Branch Office Time Difference and Daylight Saving Time Property
+ Zone 1
+ Zone 2

3 Select the **Zone** you wish to configure.
Configured zones appear in the list at the bottom of the page.

4 Click **to Add**.

5 After you click **to Add**, a message may appear prompting you to use the Zone Basic Property and Bandwidth Management Spreadsheet. Click **OK**.

6 Leave the default values for bandwidth and resource type as is.

7 Set the **Zone Intent (ZBRN)** as follows:

- Zone 1 is for the IP Phones at the Main Office. Set Zone Intent (ZBRN) for Zone 1 to **MO (MO)**.
- Zone 2 is for the Voice Gateway Channels. Set Zone Intent (ZBRN) for Zone 2 to **VTRK (VTRK)**.

Copyright © 2008, Nortel Networks

See Figure 8 "Zone Basic Property and Bandwidth Management" (page 34).

Figure 30
Zone Basic Property and Bandwidth Management

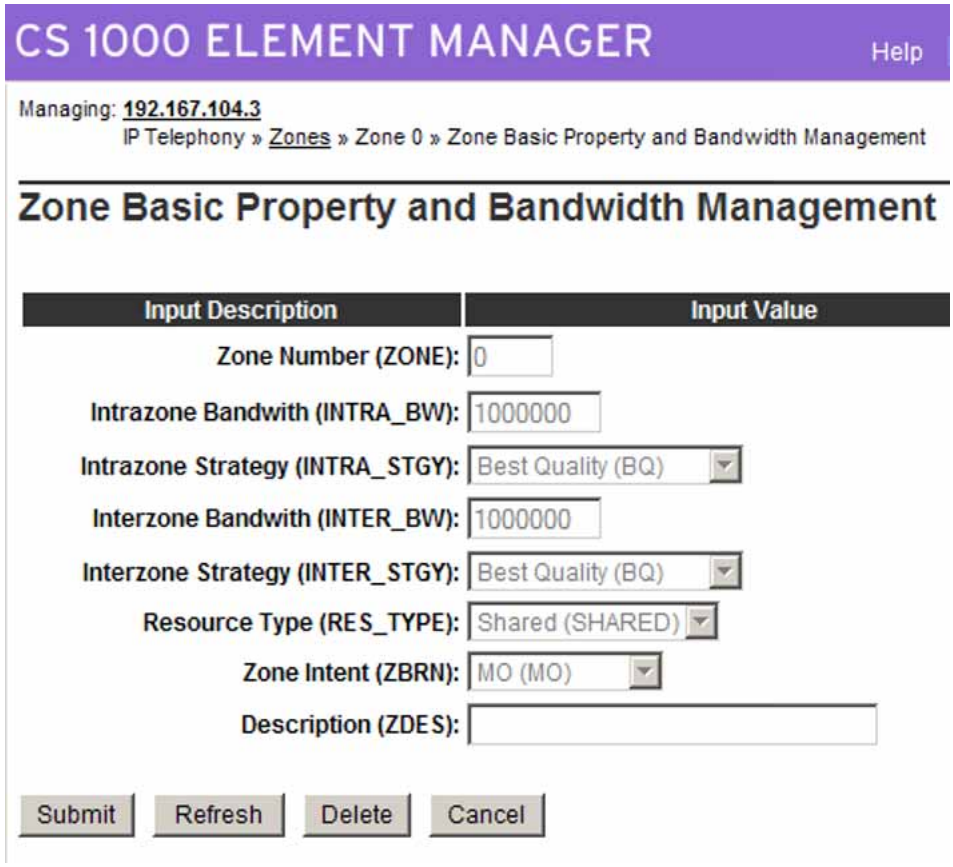

8 For **Description (ZDES)**, type a meaningful description.

9 Click **Submit**.

10 Repeat this procedure for all additional zones you wish to create.

—End—

Creating the virtual route (LD 16)

Perform the following procedure to create the virtual route.

Copyright © 2008, Nortel Networks

Step	Action
1	Log on to Element Manager.
2	Select **Routes and Trunks > Routes and Trunks**.
3	Click the **Add route** button. The Route Property Configuration page appears. The trunk type (TKTP) you choose determines the parameters available on this page. See Figure 9 "Route Property Configuration" (page 36) for one possible view of the Route Property Configuration page.

Copyright © 2008, Nortel Networks

Figure 31
Route Property Configuration

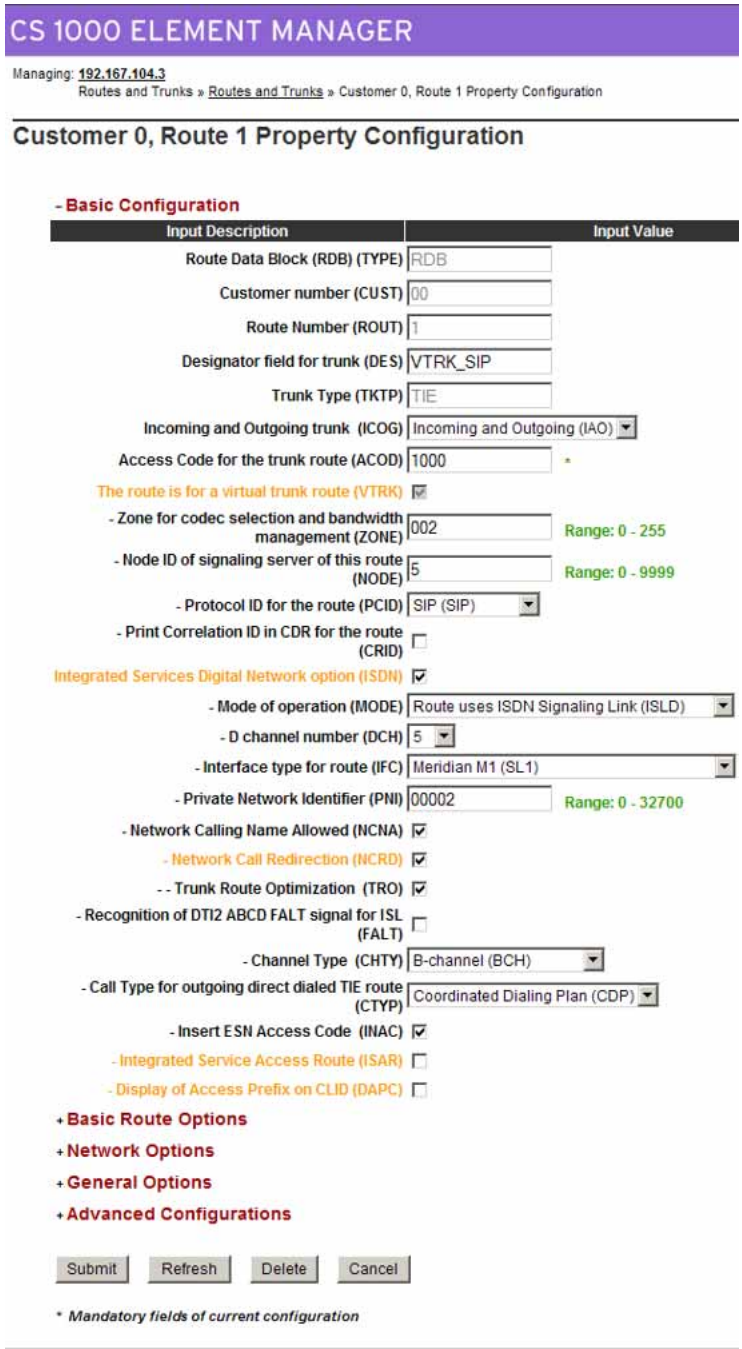
CS 1000 ELEMENT MANAGER
Managing: 192.167.104.3
Routes and Trunks » Routes and Trunks » Customer 0, Route 1 Property Configuration
Customer 0, Route 1 Property Configuration
- Basic Configuration
Input Description
Input Value
Route Data Block (RDB) (TYPE) RDB
Customer number (CUST) 00
Route Number (ROUT) 1
Designator field for trunk (DES) VTRK_SIP
Trunk Type (TKTP) TIE
Incoming and Outgoing trunk (ICOG) Incoming and Outgoing (IAO)
Access Code for the trunk route (ACOD) 1000 *
The route is for a virtual trunk route (VTRK)
- Zone for codec selection and bandwidth management (ZONE) 002 Range: 0 - 255
- Node ID of signaling server of this route (NODE) 5 Range: 0 - 9999
- Protocol ID for the route (PCID) SIP (SIP)
- Print Correlation ID in CDR for the route (CRID)
Integrated Services Digital Network option (ISDN)
- Mode of operation (MODE) Route uses ISDN Signaling Link (ISLD)
- D channel number (DCH) 5
- Interface type for route (IFC) Meridian M1 (SL1)
- Private Network Identifier (PNI) 00002 Range: 0 - 32700
- Network Calling Name Allowed (NCNA)
- Network Call Redirection (NCRD)
- - Trunk Route Optimization (TRO)
- Recognition of DTI2 ABCD FALT signal for ISL (FALT)
- Channel Type (CHTY) B-channel (BCH)
- Call Type for outgoing direct dialed TIE route (CTYP) Coordinated Dialing Plan (CDP)
- Insert ESN Access Code (INAC)
- Integrated Service Access Route (ISAR)
- Display of Access Prefix on CLID (DAPC)
+ Basic Route Options
+ Network Options
+ General Options
+ Advanced Configurations
Submit
Refresh
Delete
Cancel
* Mandatory fields of current configuration

4 Select the **Route Number (ROUT)**.

5 For **Designator field for trunk (DES)**, type a meaningful name.

Copyright © 2008, Nortel Networks

6 For **Trunk Type (TKTP)**, select **TIE trunk data block (TIE)**.

7 For **Incoming and Outgoing trunk (ICOG)**, select **Incoming and Outgoing (IAO)**.

8 Set the **Access Code for the trunk route (ACOD)**.

9 Select the **The route is for a virtual trunk route (VTRK)** check box.

10 Type the **Zone** number of the zone with the ZBRN set to Vtrk for the new route.
This value must match the values you configure in the Signaling Server.

11 Type the **Node ID of signaling server of this route (NODE)**.
This value must match the values you configure in the Signaling Server.

12 For **Protocol ID for the route (PCID)**, select **H323 (H323)**.

13 Select the **Integrated Services Digital Network option (ISDN)** check box.

14 For **Mode of operation (MODE)**, select **Route uses ISDN Signaling Link (ISLD)**.

15 Select the virtual **D channel number (DCH)**.

16 For **Interface type for route (IFC)**, select **Meridian M1 (SL1)**.

17 Leave the **Call Type for outgoing direct dialed TIE route (CTYP)** at the default value.
It is best to let NARS/BARS entries determine the NPI/TON for a number so that the route can be used for multiple call types.

18 Select the **Insert ESN Access Code (INAC)** check box.

19 Leave the other default values as is and click **Submit**.
The Routes and Trunks page appears showing the created routes.

—End—

Creating the virtual trunks (LD 14)

The Virtual Trunk TNs that you configure in this procedure cannot overlap with the ones that you configure for IP Phones.

Create separate virtual routes for SIP and H.323. The SIP route is configured in the procedure "Configuring IP networking for SIP" (page 59).

Copyright © 2008, Nortel Networks

Step	Action
1	Log on to Element Manager.
2	Select **Routes and Trunks > Routes and Trunks**. See .
3	Expand the **Customer** heading.
4	Click **Add trunk** next to the route to which you wish to add the trunk. The New Trunk Configuration page appears. See Figure 10 "New Trunk Configuration" (page 39). Your configuration determines the parameters available on this page.

Copyright © 2008, Nortel Networks

Figure 32
New Trunk Configuration

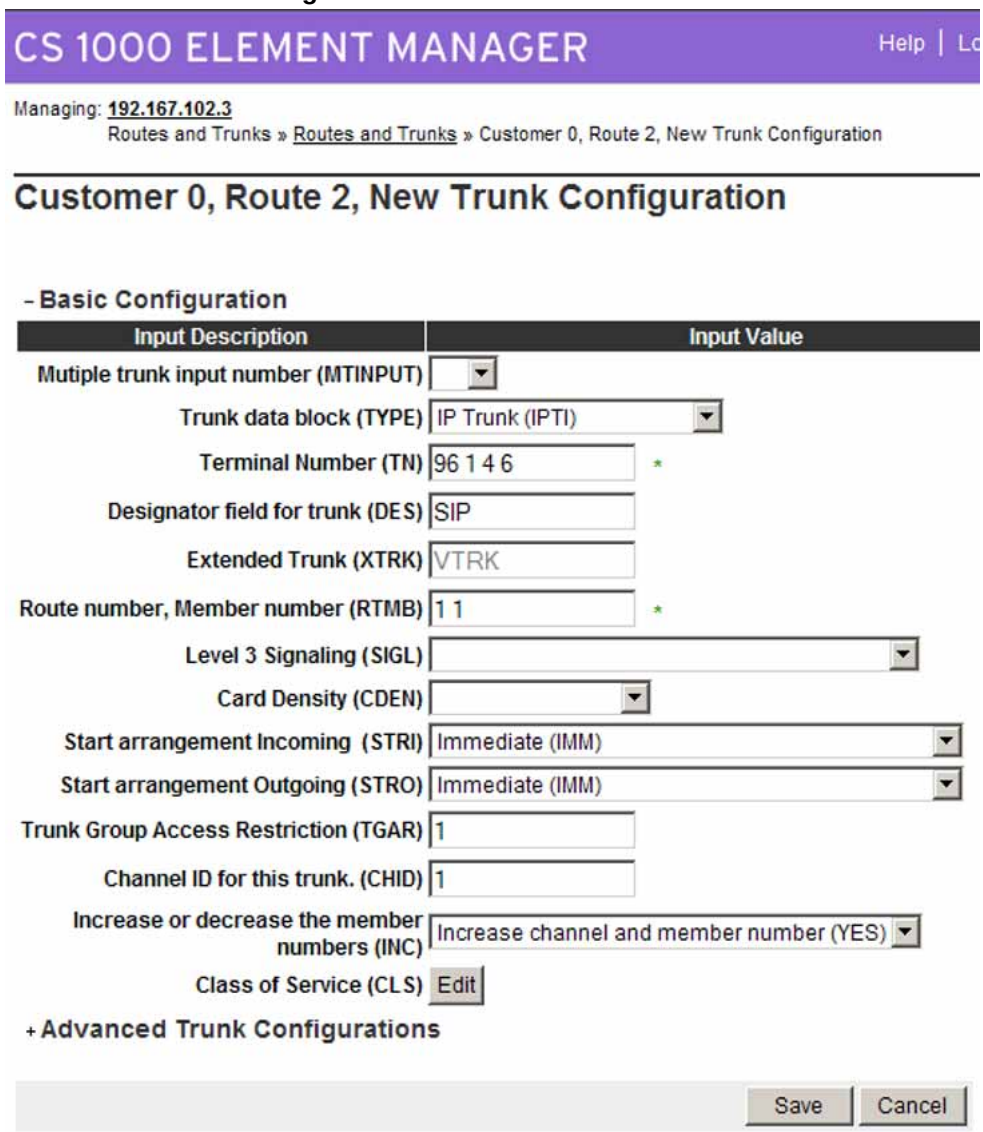

5 If you are configuring several trunks the same way, select the **Multiple trunk input number (MTINPUT)** (optional).

6 For **Trunk data block (TYPE)**, select **IP Trunk (IPTI)**.

7 Type the **Terminal Number (TN)** for the trunk.

8 For **Designator field for trunk (DES)**, type a meaningful value.

9 Type the **Route number, Member number (RTMB)** for the trunk.

Copyright © 2008, Nortel Networks

10 Set the values of **Start arrangement Incoming (STRI)** and **Start arrangement Outgoing (STRO)**.
Immediate (IMM) is recommended for both fields.

11 Type the **Channel ID for this trunk (CHID)**.

12 You can add a Class of Service (CLS) for all features that you wish. In a basic configuration, you can leave the CLS as is.

13 Select **Advanced Trunk Configurations** to display a list of advanced features.

14 Edit the necessary fields or accept the default values.

15 Click **Submit**.

—End—

Creating the ESN data block for CDP

Perform the following procedure to create the ESN data block for CDP.

Step	Action
1	Log on to Element Manager.
2	Select **Dialing and Numbering Plans > Electronic Switched Network**. The Electronic Switched Network page appears. See Figure 11 "Electronic Switched Network" (page 41).

Copyright © 2008, Nortel Networks

Figure 33
Electronic Switched Network

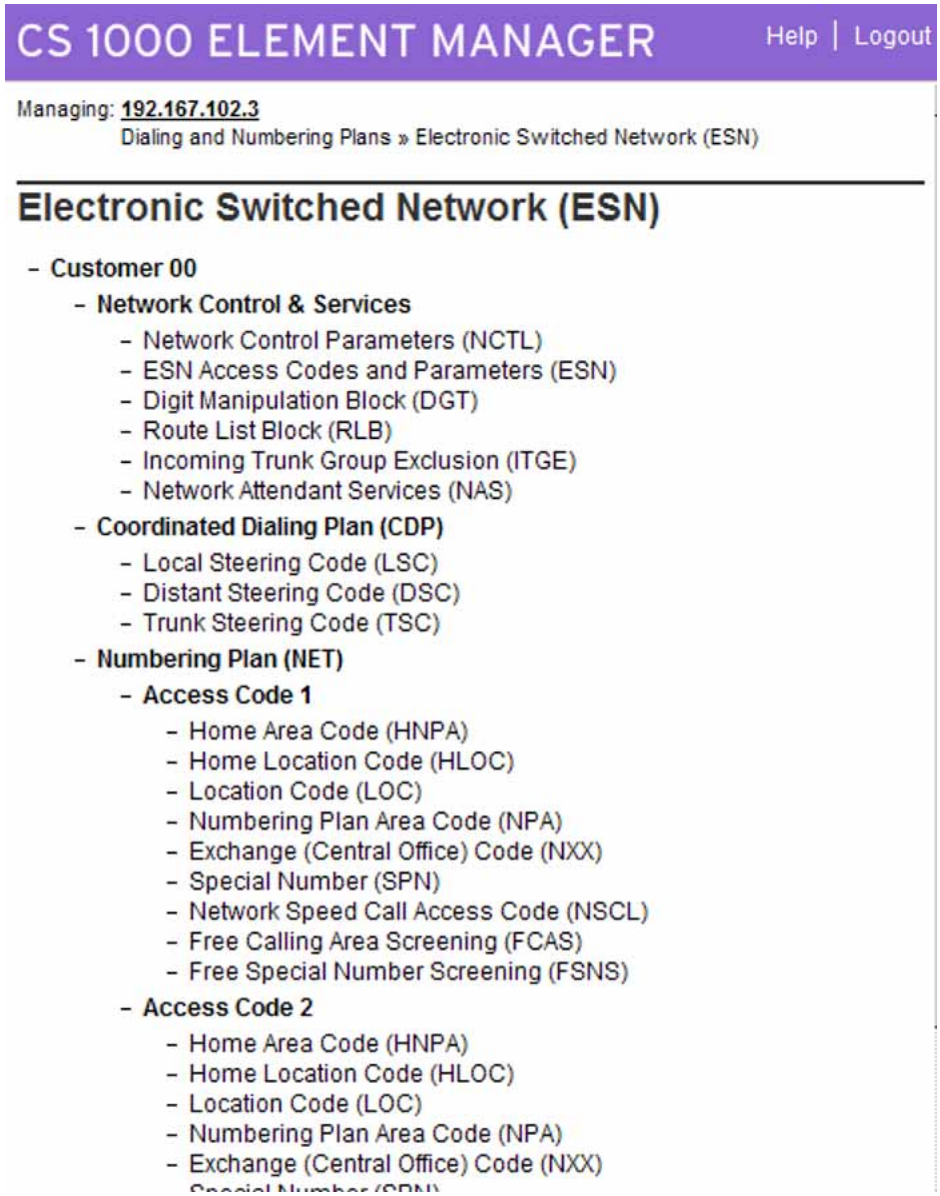
CS 1000 ELEMENT MANAGER
Help | Logout
Managing: 192.167.102.3
Dialing and Numbering Plans » Electronic Switched Network (ESN)
Electronic Switched Network (ESN)
- Customer 00
- Network Control & Services
- Network Control Parameters (NCTL)
- ESN Access Codes and Parameters (ESN)
- Digit Manipulation Block (DGT)
- Route List Block (RLB)
- Incoming Trunk Group Exclusion (ITGE)
- Network Attendant Services (NAS)
- Coordinated Dialing Plan (CDP)
- Local Steering Code (LSC)
- Distant Steering Code (DSC)
- Trunk Steering Code (TSC)
- Numbering Plan (NET)
- Access Code 1
- Home Area Code (HNPA)
- Home Location Code (HLOC)
- Location Code (LOC)
- Numbering Plan Area Code (NPA)
- Exchange (Central Office) Code (NXX)
- Special Number (SPN)
- Network Speed Call Access Code (NSCL)
- Free Calling Area Screening (FCAS)
- Free Special Number Screening (FSNS)
- Access Code 2
- Home Area Code (HNPA)
- Home Location Code (HLOC)
- Location Code (LOC)
- Numbering Plan Area Code (NPA)
- Exchange (Central Office) Code (NXX)

3 Select **Customer > Network Control & Services > ESN Access Codes and Parameters (ESN)**.

4 A message appears if ESN data is not configured. Click **OK**. The ESN Access Codes and Basic Parameters page appears. See Figure 12 "ESN Access Codes and Basic Parameters" (page 42). If ESN data is configured on your switch, the fields on this page appear populated.

Copyright © 2008, Nortel Networks

Figure 34
ESN Access Codes and Basic Parameters

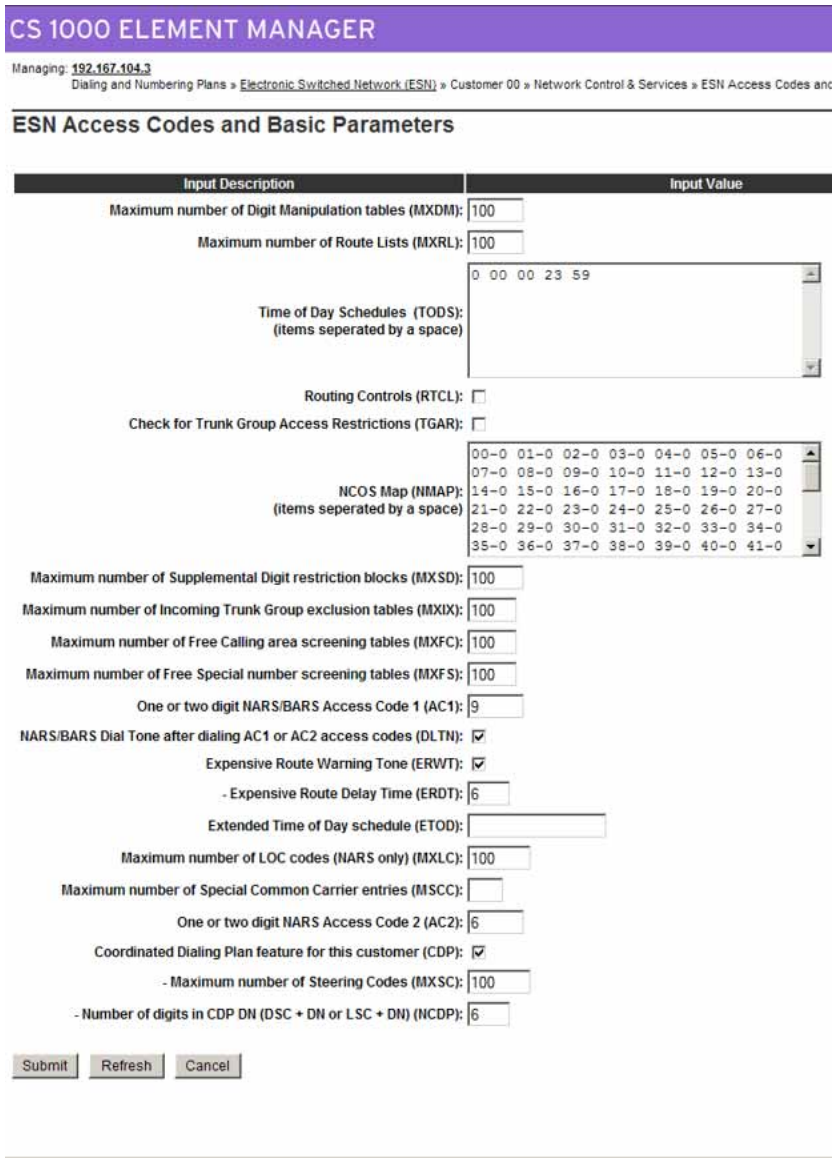
CS 1000 ELEMENT MANAGER
Managing: 192.167.104.3
Dialing and Numbering Plans » Electronic Switched Network (ESN) » Customer 00 » Network Control & Services » ESN Access Codes and
ESN Access Codes and Basic Parameters
Input Description
Input Value
Maximum number of Digit Manipulation tables (MXDM): 100
Maximum number of Route Lists (MXRL): 100
Time of Day Schedules (TODS): (items seperated by a space)
0 00 00 23 59
Routing Controls (RTCL):
Check for Trunk Group Access Restrictions (TGAR):
NCOS Map (NMAP): (items seperated by a space)
00-0 01-0 02-0 03-0 04-0 05-0 06-0
07-0 08-0 09-0 10-0 11-0 12-0 13-0
14-0 15-0 16-0 17-0 18-0 19-0 20-0
21-0 22-0 23-0 24-0 25-0 26-0 27-0
28-0 29-0 30-0 31-0 32-0 33-0 34-0
35-0 36-0 37-0 38-0 39-0 40-0 41-0
Maximum number of Supplemental Digit restriction blocks (MXSD): 100
Maximum number of Incoming Trunk Group exclusion tables (MXIX): 100
Maximum number of Free Calling area screening tables (MXFC): 100
Maximum number of Free Special number screening tables (MXFS): 100
One or two digit NARS/BARS Access Code 1 (AC1): 9
NARS/BARS Dial Tone after dialing AC1 or AC2 access codes (DLTN):
Expensive Route Warning Tone (ERWT):
- Expensive Route Delay Time (ERDT): 6
Extended Time of Day schedule (ETOD):
Maximum number of LOC codes (NARS only) (MXLC): 100
Maximum number of Special Common Carrier entries (MSCC):
One or two digit NARS Access Code 2 (AC2): 6
Coordinated Dialing Plan feature for this customer (CDP):
- Maximum number of Steering Codes (MXSC): 100
- Number of digits in CDP DN (DSC + DN or LSC + DN) (NCDP): 6
Submit
Refresh
Cancel

5 Edit the main parameters (**MXDM**, **MXRL**, **MXSD**, **MXIX**, **MXFC**, **MXFS** and **MXLC**) if required, or leave the default values as is.

6 Select the **Coordinated Dialing Plan feature for this customer (CDP)** check box.

7 Set the value of the **Maximum number of Steering Codes (MXSC)**.

8 Set the value of the **Number of digits in CDP DN (DSC+DN or LSC+DN) (NCDP)**.

Copyright © 2008, Nortel Networks

9 Click **Submit**.

—End—

Creating the Network Control Block (NCTL) for network access (LD 87)

Perform the following procedure to create the Network Control Block.

Step	Action
1	Log onto Element Manager.
2	Select **Dialing and Numbering Plans > Electronic Switched Network**.
3	Select **Customer > Network Control & Services > Network Control Parameters (NCTL)**. See Figure 11 "Electronic Switched Network" (page 41).
4	A message appears if no network control data is configured. Click **OK** to configure new data. The Network Control Parameters page appears. See Figure 13 "Network Control Parameters" (page 43).

Figure 35
Network Control Parameters

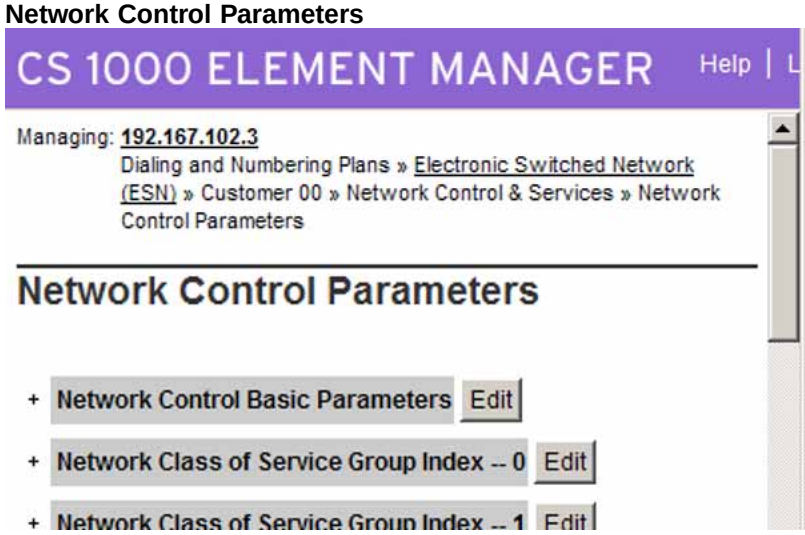
CS 1000 ELEMENT MANAGER
Help
Managing: 192.167.102.3
Dialing and Numbering Plans » Electronic Switched Network (ESN) » Customer 00 » Network Control & Services » Network Control Parameters
Network Control Parameters
+ Network Control Basic Parameters Edit
+ Network Class of Service Group Index -- 0 Edit
+ Network Class of Service Group Index -- 1 Edit

5 Click the **Edit** button next to Network Control Basic Parameters.
The Network Control Basic Parameters page appears. See Figure 36 "Network Control Basic Parameters" (page 77).

Copyright © 2008, Nortel Networks

Figure 36
Network Control Basic Parameters

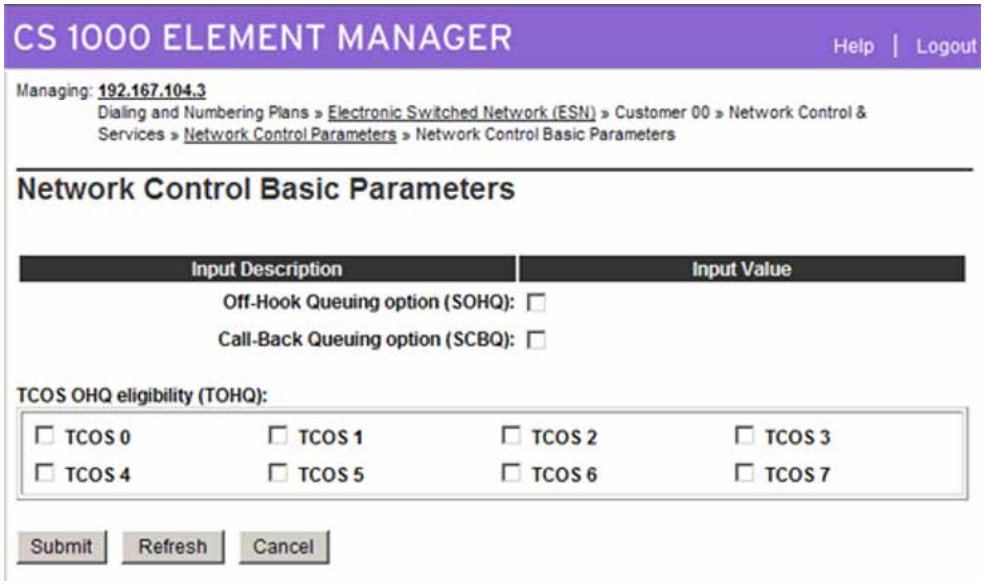

6 Choose the basic control parameters for your network.

7 Click **Submit**.

—End—

Creating the RLB for the virtual trunk route (LD 86)

Perform the following procedure to create the RLB for the virtual trunk route.

Step	Action
1	Log on to Element Manager.
2	Select **Dialing and Numbering Plans > Electronic Switched Network**.
3	Select **Customer > Network Control & Services > Route List Block (RLB)**. If route list blocks are not configured, the error message “Route List does not exist” appears. Click **OK**.
4	Type the **Route List Index number**.
5	Click **to Add**.

Copyright © 2008, Nortel Networks

The Route List Block Configuration page appears. See Figure 15 "Route List Block" (page 45).

Figure 37
Route List Block

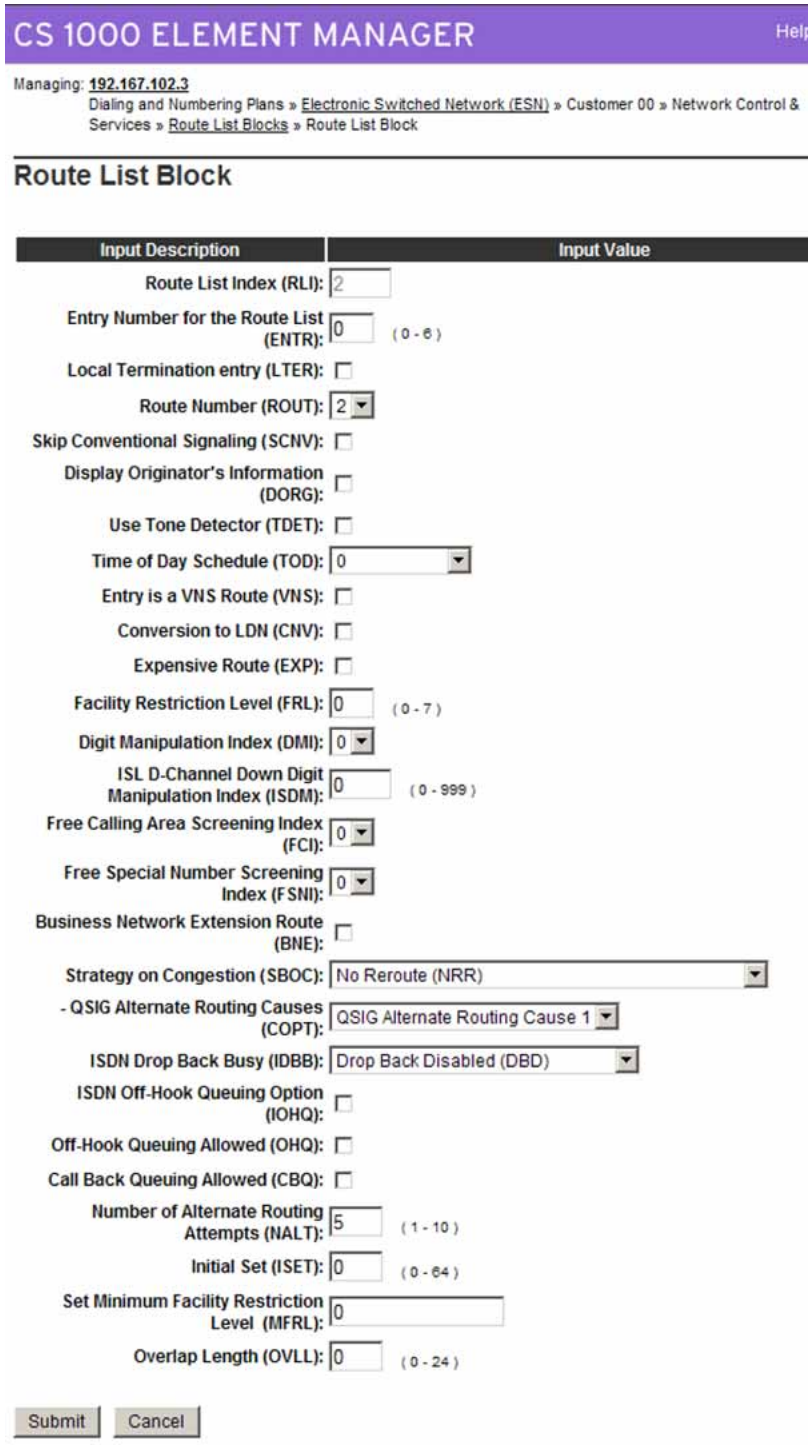
CS 1000 ELEMENT MANAGER
Help
Managing: 192.167.102.3
Dialing and Numbering Plans » Electronic Switched Network (ESN) » Customer 00 » Network Control & Services » Route List Blocks » Route List Block
Route List Block
Input Description
Input Value
Route List Index (RLI): 2
Entry Number for the Route List (ENTR): 0 (0 - 6)
Local Termination entry (LTER):
Route Number (ROUT): 2
Skip Conventional Signaling (SCNV):
Display Originator's Information (DORG):
Use Tone Detector (TDET):
Time of Day Schedule (TOD): 0
Entry is a VNS Route (VNS):
Conversion to LDN (CNV):
Expensive Route (EXP):
Facility Restriction Level (FRL): 0 (0 - 7)
Digit Manipulation Index (DMI): 0
ISL D-Channel Down Digit Manipulation Index (ISDM): 0 (0 - 999)
Free Calling Area Screening Index (FCI): 0
Free Special Number Screening Index (FSNI): 0
Business Network Extension Route (BNE):
Strategy on Congestion (SBOC): No Reroute (NRR)
- QSIG Alternate Routing Causes (COPT): QSIG Alternate Routing Cause 1
ISDN Drop Back Busy (IDBB): Drop Back Disabled (DBD)
ISDN Off-Hook Queuing Option (IOHQ):
Off-Hook Queuing Allowed (OHQ):
Call Back Queuing Allowed (CBQ):
Number of Alternate Routing Attempts (NALT): 5 (1 - 10)
Initial Set (ISET): 0 (0 - 64)
Set Minimum Facility Restriction Level (MFRL): 0
Overlap Length (OVLL): 0 (0 - 24)
Submit
Cancel

Copyright © 2008, Nortel Networks

6 Select the **Route Number (ROUT)** you previously defined.

7 For **Strategy on Congestion (SBOC)**, select **Reroute All (RRA)**.

8 Accept the other defaults and click **Submit**.
The new Route List Block is generated. You can check the configuration by selecting Route List Block Index and Data Entry Index.

—End—

Creating the CDP steering codes (LD 87)

Perform the following procedure to create the CDP steering codes.

Step	Action
1	Log on to Element Manager.
2	Select **Dialing and Numbering Plans > Electronic Switched Network**. The Electronic Switched Network page appears. See Figure 11 "Electronic Switched Network" (page 41).
3	Select **Customer > Coordinated Dialing Plan (CDP) > Distant Steering Code (DSC)**. The Distant Steering Code List page appears. See Figure 38 "Distant Steering Code List" (page 79).

Figure 38
Distant Steering Code List

CS 1000 ELEMENT MANAGER
Help | Logout
Managing: 192.167.102.3
Dialing and Numbering Plans » Electronic Switched Network (ESN) » Customer 00 » Coordinated Dialing Plan (CDP) » Distant Steering Code List
Distant Steering Code List
Add
Add
Display
Please enter a distant steering code
to Add

4 Select **Add** to add a new Distant Steering Code.

Copyright © 2008, Nortel Networks

5 Enter a **Distant Steering Code (DSC)**.
The Distant Steering Code is a unique identifier for remote switches or locations. Add a Distant Steering Code for all remote locations.

6 Click **to Add**.
The Distant Steering Code page appears. See Figure 17 "Distant Steering Code" (page 47).

Figure 39
Distant Steering Code

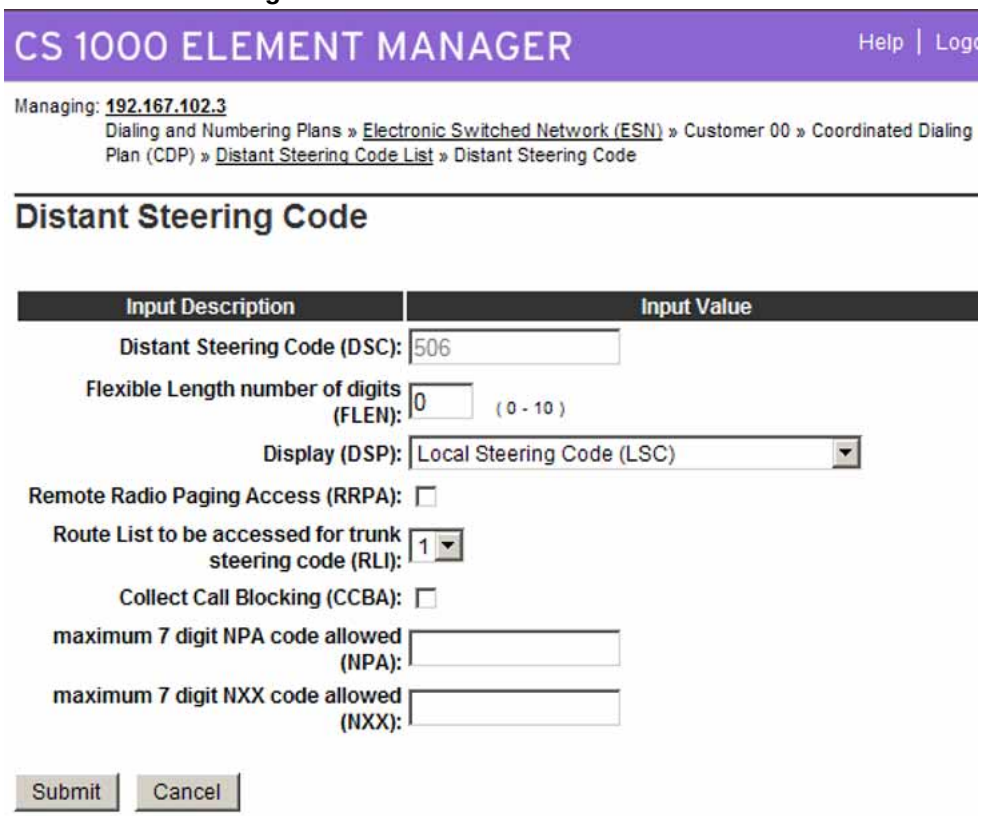
CS 1000 ELEMENT MANAGER
Help | Logo
Managing: 192.167.102.3
Dialing and Numbering Plans » Electronic Switched Network (ESN) » Customer 00 » Coordinated Dialing Plan (CDP) » Distant Steering Code List » Distant Steering Code
Distant Steering Code
Input Description
Input Value
Distant Steering Code (DSC):
506
Flexible Length number of digits (FLEN):
0
(0 - 10)
Display (DSP):
Local Steering Code (LSC)
Remote Radio Paging Access (RRPA):
Route List to be accessed for trunk steering code (RLI):
1
Collect Call Blocking (CCBA):
maximum 7 digit NPA code allowed (NPA):
maximum 7 digit NXX code allowed (NXX):
Submit
Cancel

7 Check that the parameters are configured appropriately for your system.

8 Select a **Route List to be accessed for trunk steering code (RLI)**.

9 Click **Submit**.

10 Repeat this procedure for all other DSCs on your network.

—End—

Copyright © 2008, Nortel Networks

Checking CODEC and QoS settings

At this point, the Call Server configuration is complete. It is recommended that you check the CODEC and QoS settings.

Step	Action
1	Log on to Element Manager.
2	Select **System > IP Network > Nodes: Servers, Media Cards**. See Figure 18 "Node Configuration" (page 48).

Figure 40
Node Configuration

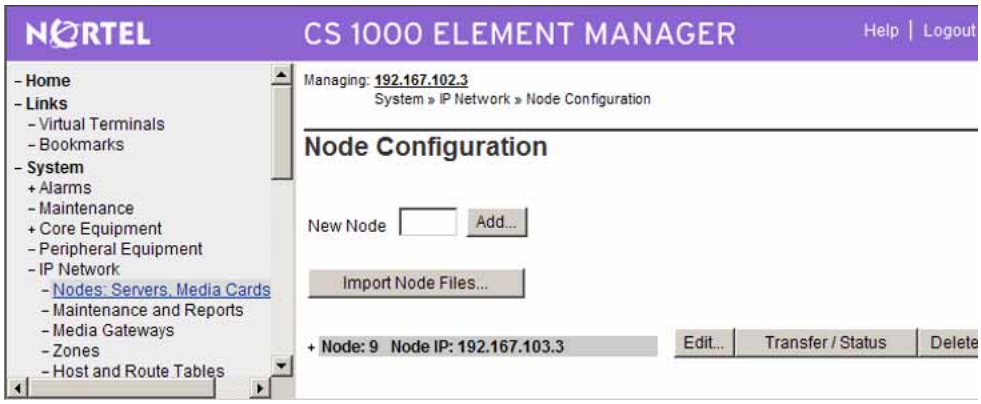

3	Click **Edit**.
4	Expand the **VGW and IP phone codec profile** heading and edit the fields as necessary. See Figure 41 "VGW and IP phone codec profile" (page 82).

Copyright © 2008, Nortel Networks

Figure 41
VGW and IP phone codec profile

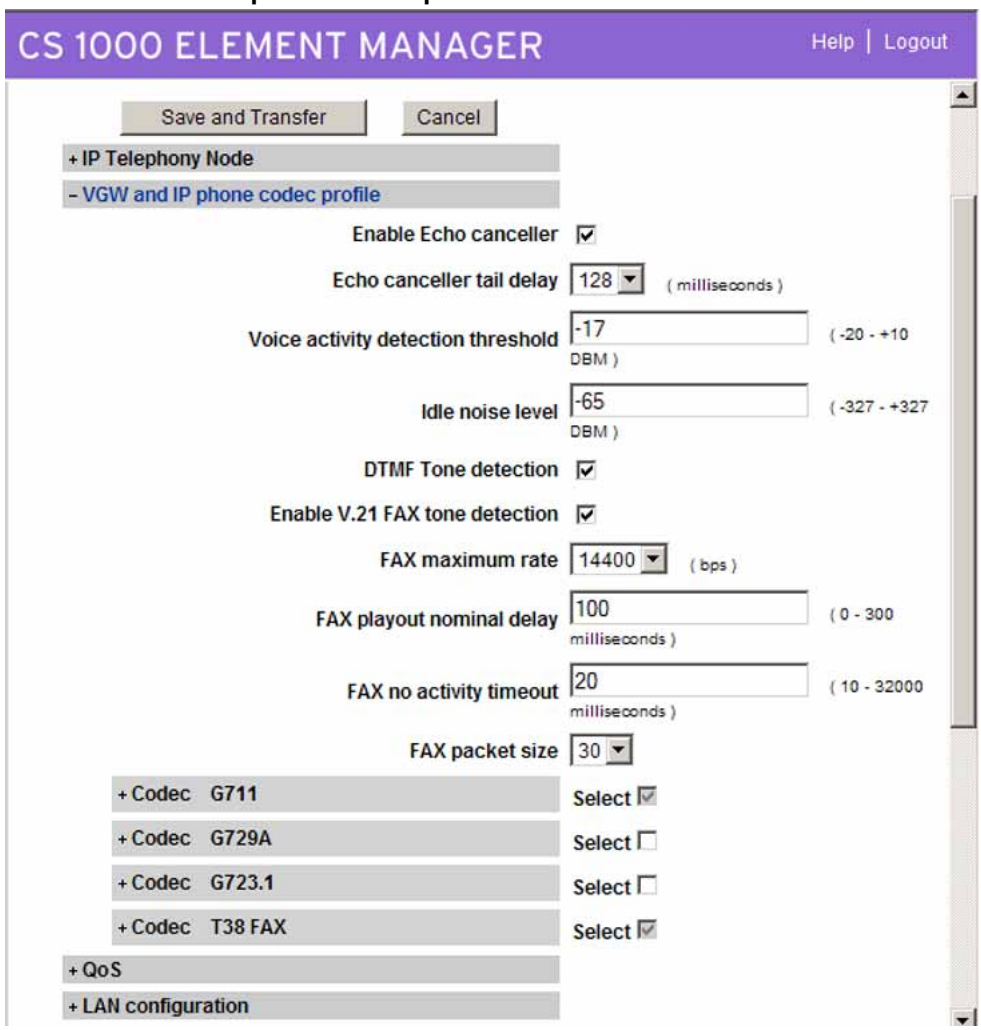

5 Expand the **QoS** heading and edit the fields as necessary. See Figure 42 "QoS" (page 83).

Copyright © 2008, Nortel Networks

Figure 42
QoS

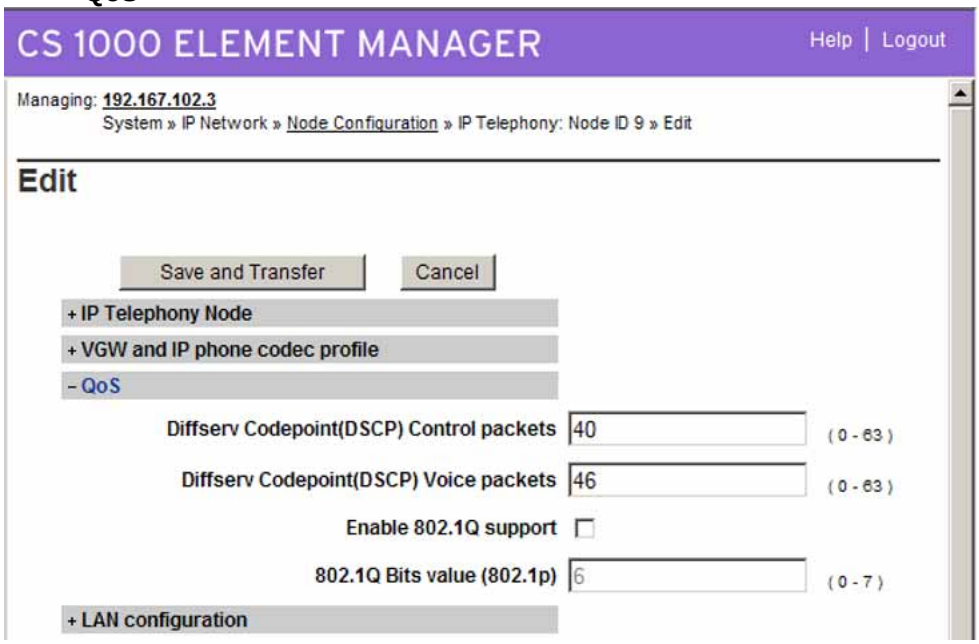

6 If you make configuration changes, click **Save and Transfer**. When the successful transfer notification message appears, click **OK**.
If you do not make configuration changes, click **Cancel**.

—End—

Copyright © 2008, Nortel Networks

Copyright © 2008, Nortel Networks

NRS configuration

The Network Routing Service (NRS) uses a basic SIP structure for its configuration, which is applicable for SIP, H.323, and Network Connection Server (NCS) call completion. This structure is the basis of the single network dialing/numbering plan.

Before you begin configuration of the NRS, gather the names of all domains and subdomains.

NRS configuration procedures

The sequence of NRS configuration procedures is as follows:

- "Launching NRS Manager" (page 85)
- "Verifying and adjusting system-wide settings" (page 87)
- "Configuring the NRS server settings (H.323 Gatekeeper or SIP)" (page 89)
- "Configuring the service domain" (page 91)
- "Configuring the L1 domain (UDP)" (page 92)
- "Configuring the L0 domain (CDP)" (page 94)
- "Configuring Gateway endpoints" (page 97)
- "Configuring routing entries" (page 101)
- "Configuring collaborative servers" (page 103)
- "Updating the database" (page 105)
- "Checking the status of registered endpoints" (page 106)
- "Checking the status of virtual D-channels" (page 107)
- "Checking the status of virtual trunks" (page 108)

Launching NRS Manager

Perform the following procedure to launch NRS Manager.

Copyright © 2008, Nortel Networks

Step	Action
1	Log on to Element Manager.
2	Select **Dialing and Numbering Plans > Network Routing Service**.
3	Click **Next**. The NRS logon page appears.
4	Click **Login**.
5	Enter the user ID and password. The NRS Overview page appears. See Figure 43 "NRS Overview" (page 87).

Copyright © 2008, Nortel Networks

Figure 43
NRS Overview

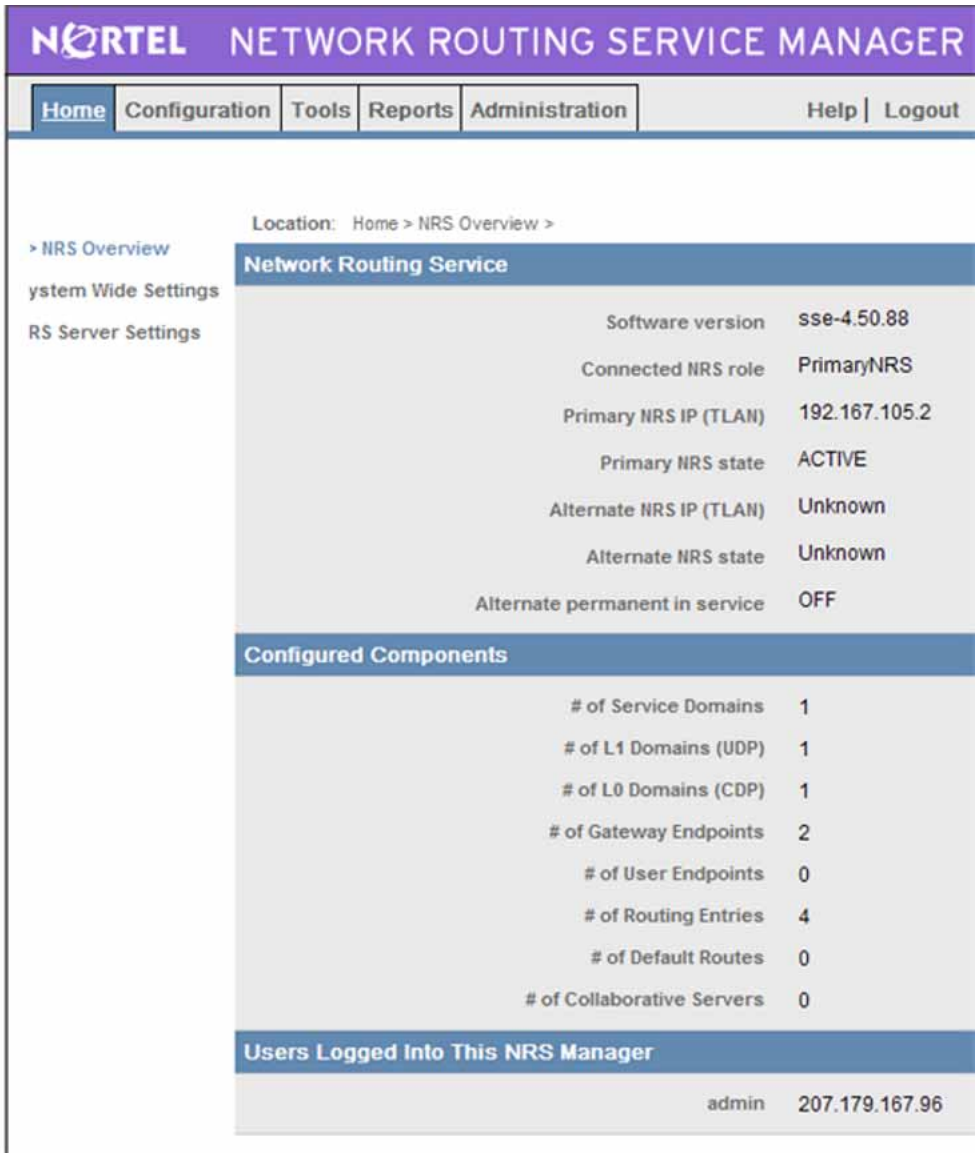

—End—

Verifying and adjusting system-wide settings

You can check system-wide settings and make changes from NRS Manager.

Copyright © 2008, Nortel Networks

Step	Action
1	Log on to NRS Manager.
2	Select **System Wide Settings**. The System Wide Settings page appears. See Figure 44 "System Wide Settings" (page 88).

Figure 44
System Wide Settings

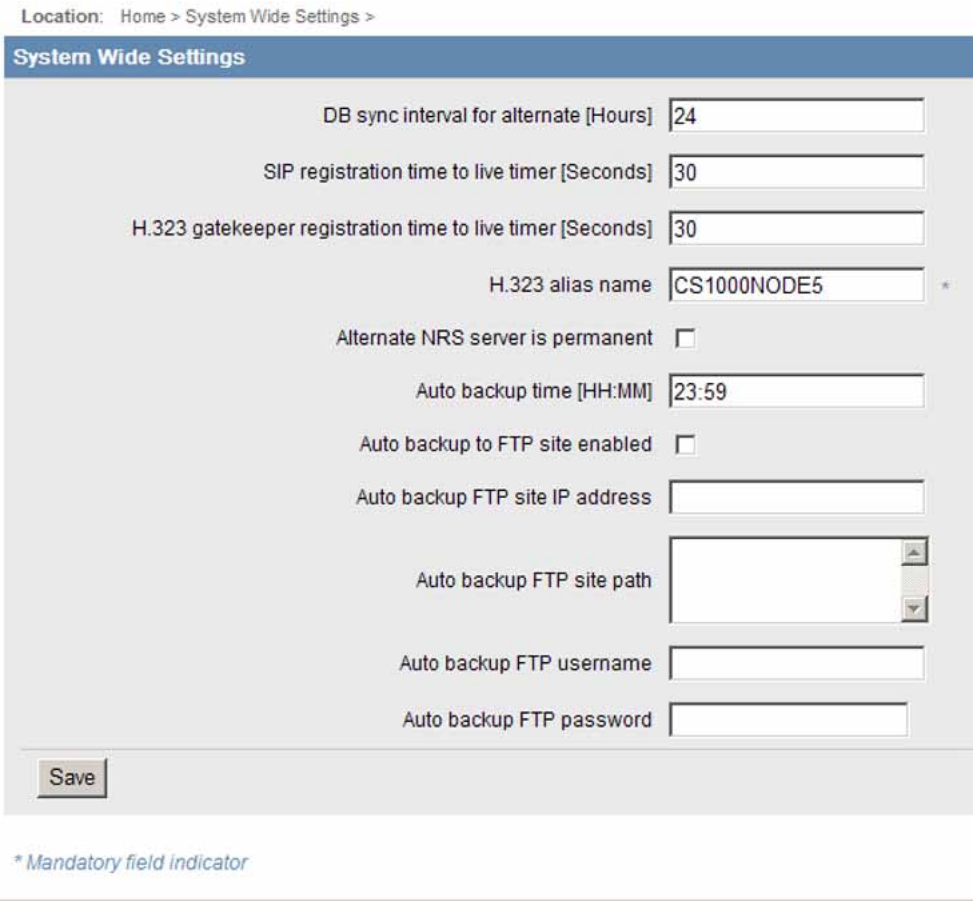

Step	Action
3	Configure the information in the System Wide Settings page. Refer to Table 4 "System Wide Settings fields" (page 88).

Table 4
System Wide Settings fields

Field	Description
DB synch interval for alternate [Hours]	24 is the default.

Copyright © 2008, Nortel Networks

Field	Description
SIP registration time to live timer [Seconds]	30 seconds is recommended.
H.323 Gatekeeper registration time to live timer [Seconds]	30 seconds is recommended.
H.323 alias name	This is a mandatory field. The H.323 Alias Name must be alphanumeric and contain no spaces. The default value is the same as the H.323 ID and HostName value configured in the PRIMARY Signaling Server's config.ini file.
Alternate NRS server is permanent	Select this check box if the Alternate NRS Server is to remain in service after a switch-over, even if the Primary NRS recovers. Clear the check box if the Alternate NRS switches over functions to the Primary NRS Server after the Primary NRS Server recovers.
Auto backup time [HH:MM]	Enter the time when the database backup automatically occurs.
Auto backup to FTP site enabled	Select this check box to enable automatic backup of the NRS database to an FTP site.
Auto backup FTP site IP address **Auto backup FTP site path** **Auto backup FTP username** **Auto backup FTP password**	Enter values for Autobackup FTP if you enabled automatic backup of the NRS database to an FTP site.

4 Click **Save**.

—End—

Configuring the NRS server settings (H.323 Gatekeeper or SIP)

Perform the following procedure to configure NRS server settings.

Step	Action
1	Log on to NRS Manager.
2	Select **NRS Server Settings**. The NRS Settings page appears. See Figure 45 "NRS Settings" (page 90).

Copyright © 2008, Nortel Networks

Figure 45
NRS Settings

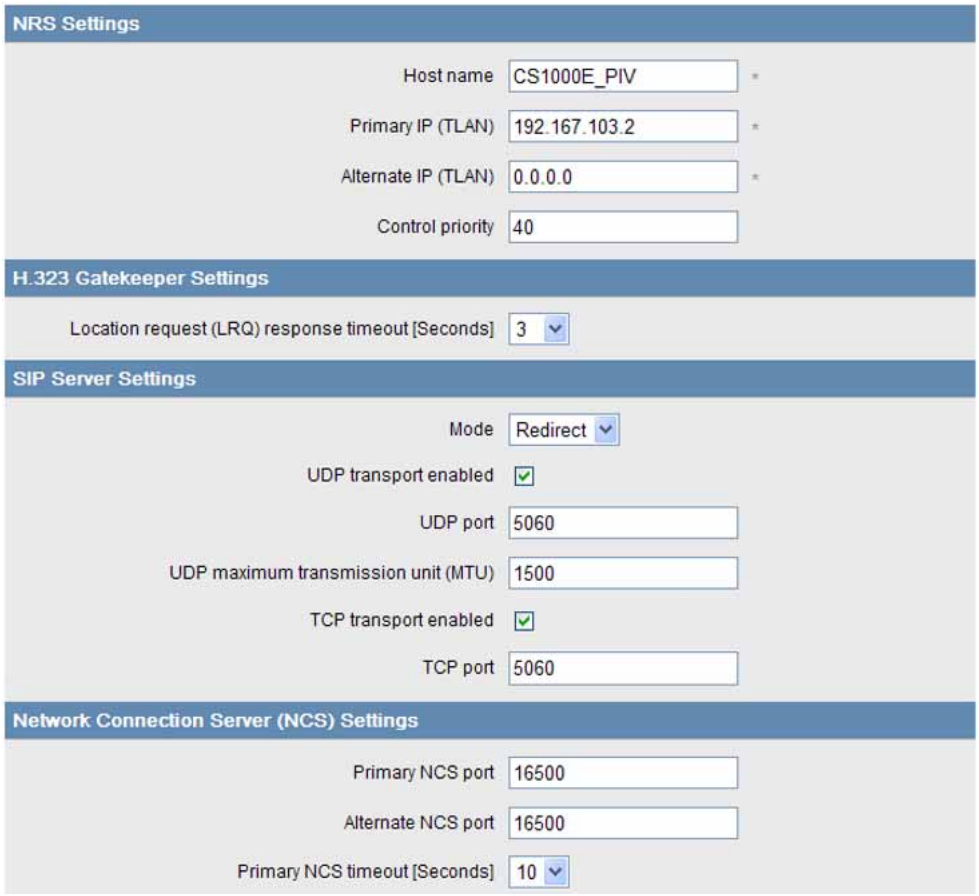

3 Under **NRS Settings**, set the following values:

- **Host name**
- **Primary IP (TLAN)**
- **Alternate IP (TLAN)**
- **Control priority**

4 Under **H.323 Gatekeeper Settings**, select the **Location request (LRQ) response timeout [Seconds]**.

5 Under **SIP Server Settings**, set the following values:

- **Mode**
- **UDP transport enabled/disabled**
- **UDP port**

Copyright © 2008, Nortel Networks

- **UDP maximum transmission unit (MTU)**
- **TCP transport enabled/disabled**
- **TCP port**
- **TCP maximum transmission unit (MTU)**

Make the values under SIP Server Settings the same as those you configure for the SIP Proxy in Element Manager.

6 Under **Network Connection Server (NCS) Settings**, set the following values:

- **Primary NCS port**
- **Alternate NCS port**
- **Primary NCS timeout [Seconds]**

7 Click **Save**.

—End—

Configuring the service domain

The NRS database information configured in this procedure is required by both the SIP Redirect Server and the H.323 Gatekeeper.

Step	Action
1	Log on to NRS Manager.
2	Select the **Configuration** tab.
3	A message may appear if the active and Standby databases are not synchronized. Click **OK**.
4	Click **set Standby DB view** to switch from active to standby database view. The active database view is the default view. Use the active database for runtime queries, and the standby database for administrator modifications. You must use standby view to make changes to the database. See Figure 46 "Service Domains" (page 92).

Copyright © 2008, Nortel Networks

Figure 46
Service Domains

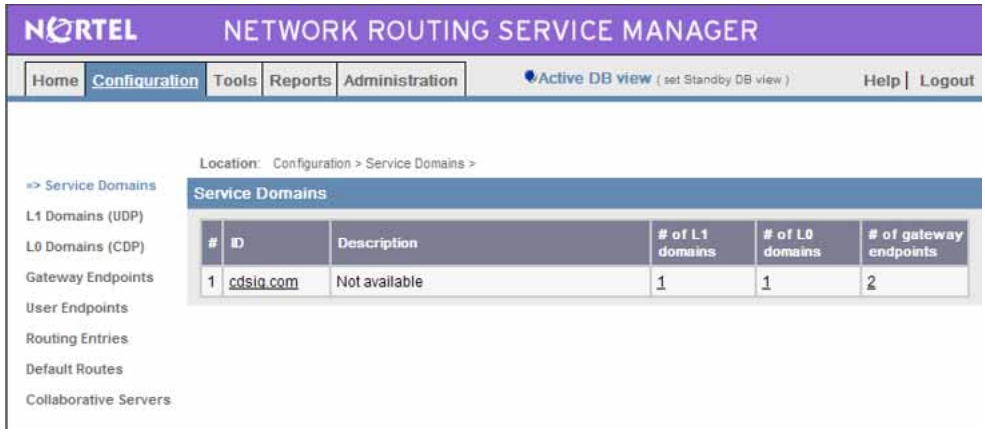

5 Select **Service Domains**.

6 Click **Add**.

7 Enter your **Domain name** and a **Domain description**.
These values must match that set for the Signaling Server.

8 Click **Save**.
The Service Domains page appears again with the new domain added.
When no description is entered, the service domain is shown with the message “Not available”. This means that the description is not entered, but the service domain is still active. This applies to all description fields in NRS Manager.

—End—

Configuring the L1 domain (UDP)

You can configure the L1 domain after you configure the service domain. The L1 domain is a service domain associated with UDP.

Step	Action

1 Log on to NRS Manager.

2 Select the **Configuration** tab.

3 Click **set Standby DB view** to switch from active to standby database view.

4 Select **L1 Domains (UDP)**.

Copyright © 2008, Nortel Networks

5 Click **Add**.
The Add L1 Domain page appears. See Figure 47 "Add L1 Domain" (page 93).

Figure 47
Add L1 Domain

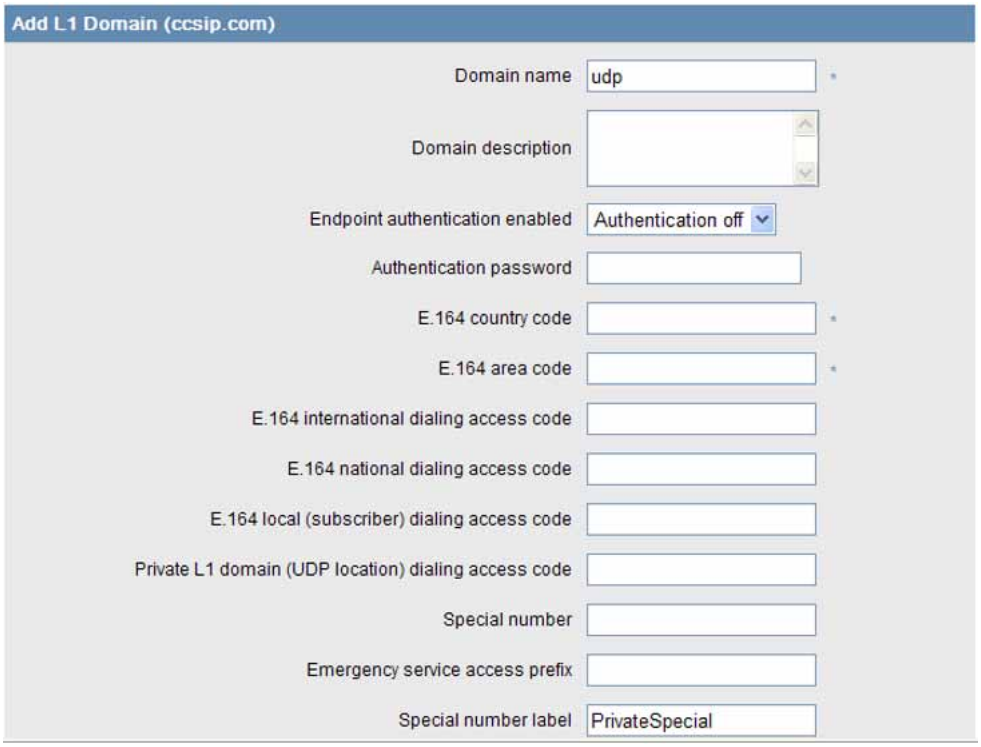

6 Configure the L1 domain.
Refer to Table 5 "L1 domain fields" (page 93) for configuration information.

Table 5
L1 domain fields

Field	Value	Description
Domain name	<alphanumeric string>	Mandatory. The name must be alphanumeric and can be up to 30 characters in length.
Domain description	<character string>	Optional. The description can include any character except single quotes and be up to 120 characters in length.
Endpoint authentication enabled	Authentication off Authentication on Not configured	If Authentication on is selected, all endpoints require authentication.

Copyright © 2008, Nortel Networks

Field	Value	Description
Authentication password	<alphanumeric string>	If Authentication on is selected, enter an authentication password. The password must be alphanumeric and up to 30 characters in length.
E.164 country code	<numeric string>	Mandatory. The code must be numeric and up to 7 characters in length.
E.164 area code	<numeric string>	Mandatory. The code must be numeric and up to 7 characters in length.
E.164 international dialing access code	<numeric string>	Optional. The code must be numeric and up to 7 characters in length.
E.164 national dialing access code	<numeric string>	Optional. The code must be numeric and up to 7 characters in length.
E.164 local (subscriber) dialing access code	<numeric string>	Optional. The code must be numeric and up to 7 characters in length.
Private L1 domain (UDP) location) dialing access code	<numeric string>	Optional. The code must be numeric and up to 7 characters in length.
Special number	<numeric string>	Optional. The number must be numeric and up to 30 characters in length.
Emergency service access prefix	<numeric string>	Optional. The number must be numeric and up to 30 characters in length.
Special number label	<alphanumeric string>	Optional. The label must be alphanumeric and up to 30 characters in length. The first character in the label must be alphabetic.

7 Click **Save**.
The L1 Domains page appears again with the new L1 domain added.

8 To view the configured data for the L1 domain, click the **ID** in the **L1 Domains (UDP)** menu.
The View L1 Domain Property page appears, displaying your configured data.

—End—

Configuring the L0 domain (CDP)

The L0 domain is a service domain associated with CDP, representing the private addresses field in the SIP URI. This address is composed of the service, L1, and L0 domains.

Copyright © 2008, Nortel Networks

Step	Action
1	Log on to NRS Manager.
2	Select the **Configuration** tab.
3	Click **set Standby DB view** to switch from active to standby database view.
4	Select **L0 Domains (CDP)**.
5	Click **Add**. The Add L0 Domain page appears. See Figure 48 "Add L0 Domain" (page 95).

Figure 48
Add L0 Domain

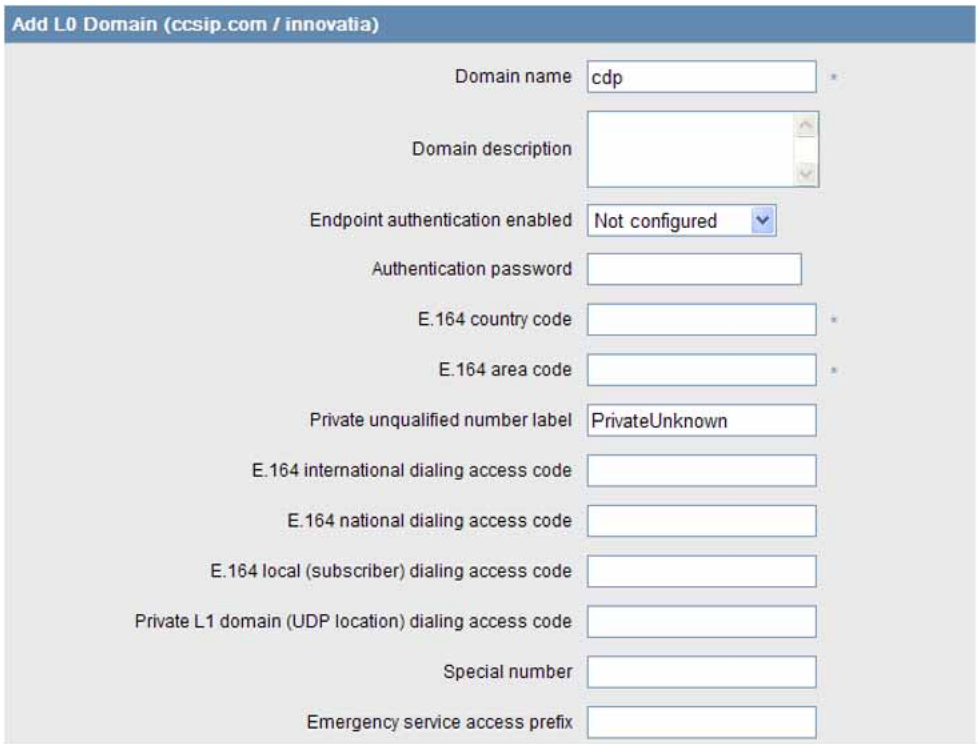

6	Enter the appropriate values for your network. Refer to Table 6 "Add L0 Domain fields" (page 96)for configuration information. The country codes, area codes, public prefixes, and private prefixes must match those of your L1 domain.

Copyright © 2008, Nortel Networks

Table 6
Add L0 Domain fields

Field	Value	Description
Domain name	<alphanumeric string>	Mandatory. The name must be alphanumeric and can be up to 30 characters in length.
Domain description	<character string>	Optional. The description can include any character except single quotes and can be up to 120 characters in length.
Endpoint authentication enabled	Authentication off Authentication on Not configured	If Authentication on is selected, then all endpoints require authentication.
Authentication password	<alphanumeric string>	if Authentication on is selected, enter a password. The password must be alphanumeric and up to 30 characters in length.
E.164 country code	<numeric string>	Optional. The code must be numeric and up to 7 characters in length.
E.164 area code	<numeric string>	Optional. The code must be numeric and up to 7 characters in length.
Private unqualified number label	<alphanumeric string>	The label must be alphanumeric and up to 30 characters in length. The first character in the label must be alphabetic.
E.164 international dialing access code	<numeric string>	Optional. The code must be numeric and up to 7 characters in length.
E.164 national dialing access code	<numeric string>	Optional. The code must be numeric and up to 7 characters in length.
E.164 local (subscriber) dialing access code	<numeric string>	Optional. The code must be numeric and up to 7 characters in length.
Private L1 domain (UDP location) dialing access code	<numeric string>	Optional. The code must be numeric and up to 7 characters in length.
Special number	<numeric string>	Optional. The number must be numeric and up to 30 characters in length.
Emergency service access prefix	<numeric string>	Optional. The number must be numeric and up to 30 characters in length.

7 Click **Save**.
The L0 Domains page appears again, showing the added domain.

Copyright © 2008, Nortel Networks

8 To view the configured data, in the L0 domain page, select the service domain and L1 domain and click **Show**.
A list of configured L0 domains appears.

9 Select the L0 domain to view its configuration information.
The View L0 Domain Property page appears. See Figure 48 "Add L0 Domain" (page 95).

—End—

Configuring Gateway endpoints

Add an endpoint for both the Communication Server 1000 (CS 1000) and Business Communications Manager (BCM) systems.

These are Gateway endpoints, which can be served by several users. You can add multiple endpoints, some SIP-only, some H.323-only, and Unistim. You can also configure a user endpoint, which can be only one of these three protocols.

Step	Action
1	Log on to NRS Manager.
2	Select the **Configuration** tab
3	Click **set Standby DB view** to switch from active to standby database view.
4	Click **Gateway Endpoints**.
5	Click **Add**. The Add Gateway Endpoint page appears. See Figure 49 "Add Gateway Endpoint" (page 98).

Copyright © 2008, Nortel Networks

Figure 49
Add Gateway Endpoint

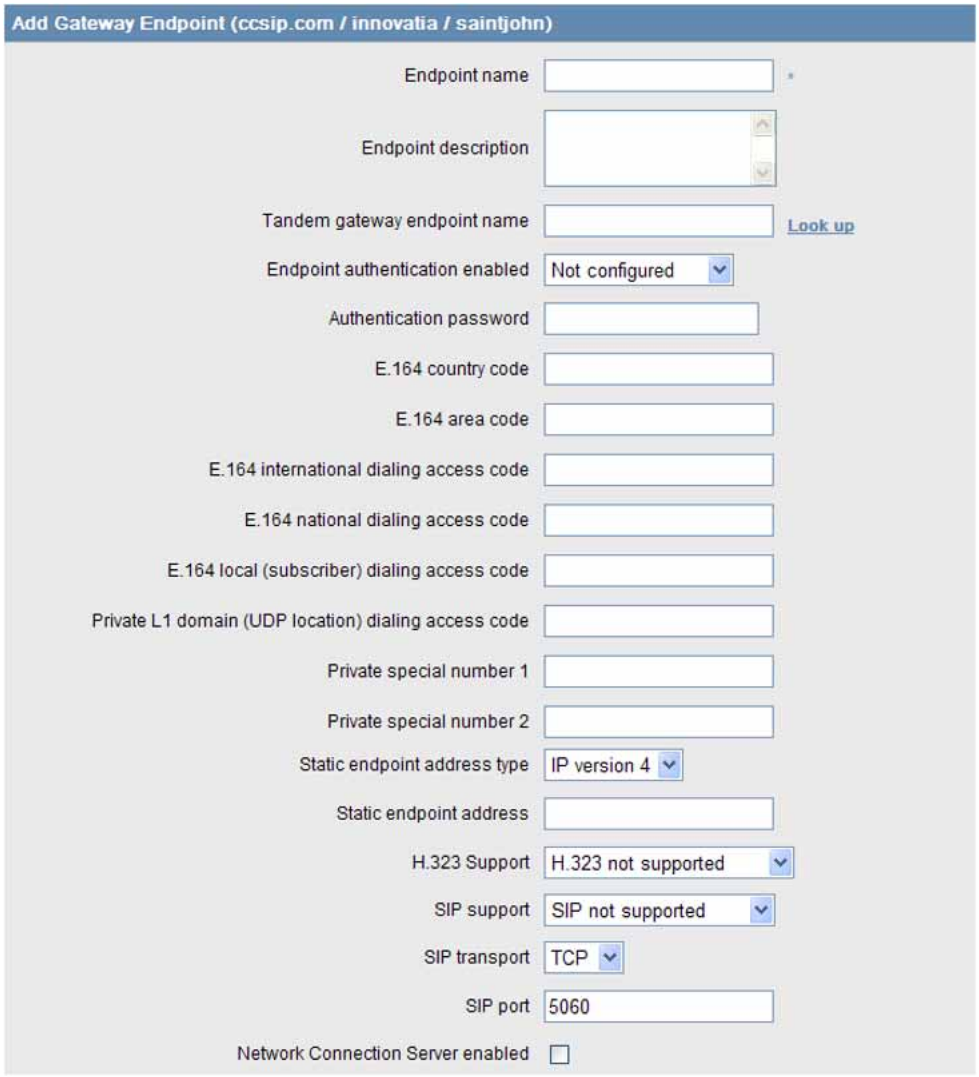

6 Enter the appropriate values for your network.
Refer to Table 7 "Add Gateway Endpoint fields" (page 98) for configuration information.

Table 7
Add Gateway Endpoint fields

Field	Value	Description
Endpoint name	<alphanumeric string>	The name must be alphanumeric and up to 30 characters in length.

Copyright © 2008, Nortel Networks

Field	Value	Description
Endpoint description	<alphanumeric string>	The description must be alphanumeric and up to 120 characters in length.
Tandem gateway endpoint name	<alphanumeric string>	The tandem Gateway is optional. This indicates whether the endpoint is used to tandem calls from outside the network. The name must be alphanumeric and up to 30 characters in length. **Note**: Use the Look-up link to find configured Gateway endpoints.
Endpoint authentication enabled	Not configured Authentication off Authentication on	If this option is selected, the Gateway endpoint uses the L1 or L0 authentication (if enabled). If this option is selected, authentication is off for this Gateway endpoint even if L1 or L0 authentication is enabled. If this option is selected, authentication is on for this Gateway endpoint, and the authentication overrides the L1 or L0 authentication (if enabled).
Authentication password	<alphanumeric string>	If Authentication on is selected, choose a password. The password must be alphanumeric and up to 30 characters in length.
E.164 country code	<numeric string>	Optional. The code must be numeric and up to 7 characters in length.
E.164 area code	<numeric string>	Optional. The code must be numeric and up to 7 characters in length.
E.164 international dialing access code	<numeric string>	Optional. The code must be numeric and up to 7 characters in length.
E.164 national dialing access code	<numeric string>	Optional. The code must be numeric and up to 7 characters in length.
E.164 local (subscriber) dialing access code	<numeric string>	Optional. The code must be numeric and up to 7 characters in length.
Private L1 domain (UDP location) dialing access code	<numeric string>	Optional. The code must be numeric and up to 7 characters in length.
Private special number 1	<numeric string>	Optional. The number must be numeric and up to 30 characters in length.
Private special number 2	<numeric string>	Optional. The number must be numeric and up to 30 characters in length.
Static endpoint address type	IP version 4	Select IP version 4 from the drop-down list.

Copyright © 2008, Nortel Networks

Field	Value	Description
Static endpoint address	<Node IP address>	This is the address of the BCM application server. If a third-party Gateway is used, it is the IP address of the Gateway.
H.323 support	H.323 not supported RAS H.323 endpoint Not RAS H.323 endpoint	RAS H.323 Endpoint is recommended. If an H.323 Gateway Endpoint is configured with an H.323 Support type of RAS H.323 endpoint, NRS Manager displays Endpoint Dynamic Registration information after the H.323 Gateway registers with the NRS. Endpoint Dynamic Registration information includes Call Signaling IP, RAS IP, Alias name, t35Country code, t35Extension, Manufacturer code, Product ID, and Version ID.
SIP support	SIP not supported Static SIP endpoint Dynamic SIP endpoint	Dynamic SIP Endpoint is recommended. If a SIP Trunk Gateway Endpoint is configured with a SIP Support type of Dynamic SIP endpoint, NRS Manager displays Endpoint Dynamic Registration Information for SIP after the SIP Trunk Gateway registers with the NRS. Endpoint Dynamic Registration Information includes SIP IP, Registration expiry time, User agent, and Preference.
SIP transport	TCP UDP TLS	TCP is selected by default. Select UDP or TLS if security is enabled, as the BCM system does not support TCP. Ensure that the far end matches this setting.
SIP port	<port value>	Default SIP port value is 5060. If the SIP Port is changed, the value must be numeric and up to 5 numbers in length. The range is 0 to 65535.
Network Connection Server enabled	<check box>	Select the Network Connection Server is enabled check box if this Gateway Endpoint supports the NCS for branch office or SRG user redirection to the main office, Virtual Office, or Geographic Redundancy.

7 Click **Save**.
The Gateway Endpoints window appears again with the new endpoints added.

8 From the Gateway Endpoint page, select the **Service Domain**, **L1 domain**, and **L0 domain** to view the configured data of an endpoint.

Copyright © 2008, Nortel Networks

9 Click **Show**.
A list of configured Gateways appears.

10 Click the **Gateway ID** you wish to view.
The Add Gateway Endpoint page appears. See Figure 49 "Add Gateway Endpoint" (page 98).

—End—

Configuring routing entries

Perform the following procedure to configure routing entries.

Step	Action
1	Log on to NRS Manager.
2	Select the **Configuration** tab
3	Click **set Standby DB view** to switch from active to standby database view.
4	Click **Routing Entries**.
5	Type the relevant **Gateway Endpoint** OR Click the **Look up** link and perform a search. All configured endpoints appear.
6	Click the endpoint to configure as a Routing Entry.
7	Select a **DN** type. For **UDP**, select **Private level 1 regional (UDP location code)**.
8	For **CDP**, select **Private level 0 regional (CDP steering code)**.
9	Click **Show**. The Routing Entries page appears. See Figure 50 "Routing Entries" (page 102).

Copyright © 2008, Nortel Networks

Figure 50
Routing Entries

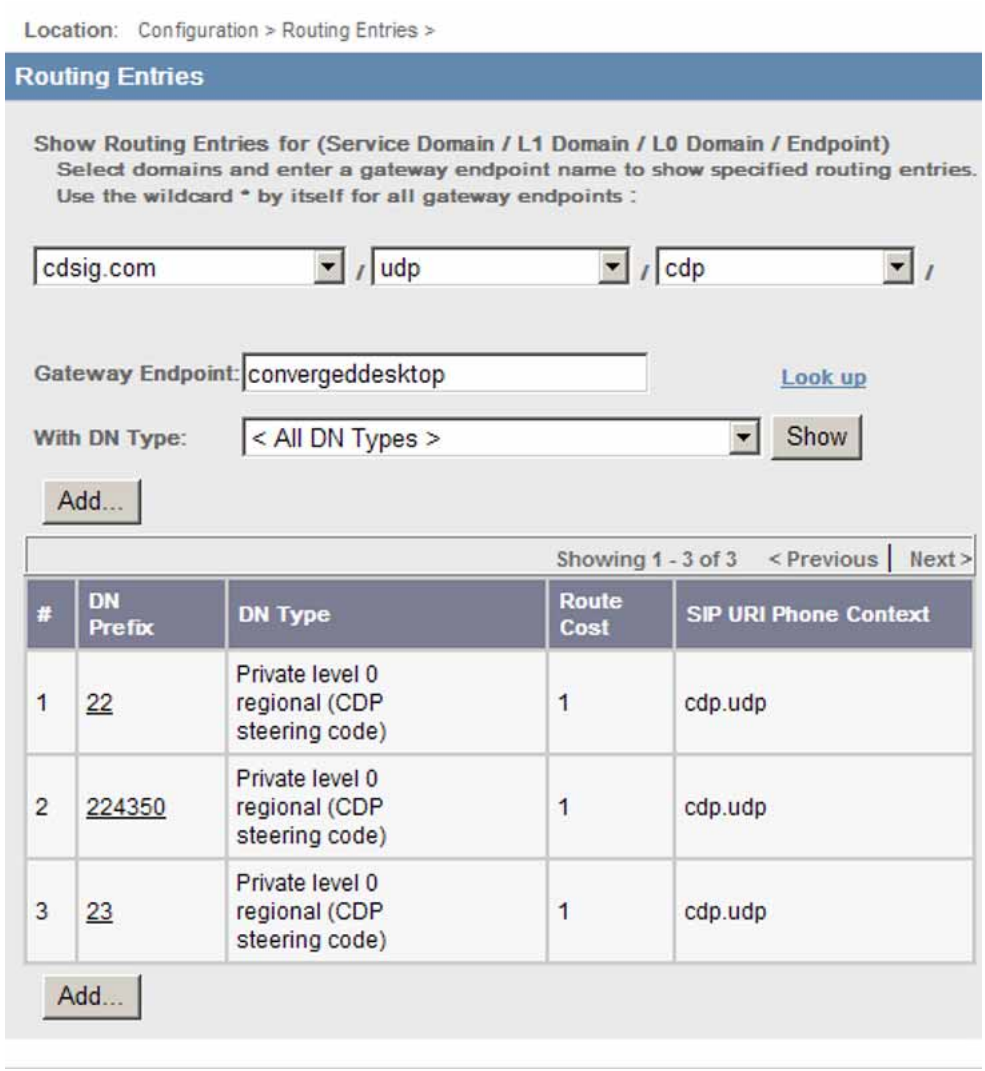
Location: Configuration > Routing Entries >
Routing Entries
Show Routing Entries for (Service Domain / L1 Domain / L0 Domain / Endpoint)
Select domains and enter a gateway endpoint name to show specified routing entries.
Use the wildcard * by itself for all gateway endpoints :
cdsig.com / udp / cdp /
Gateway Endpoint: convergeddesktop
Look up
With DN Type: < All DN Types >
Show
Add...
Showing 1 - 3 of 3 < Previous | Next >
| DN Prefix | DN Type | Route Cost | SIP URI Phone Context
1 | 22 | Private level 0 regional (CDP steering code) | 1 | cdp.udp
2 | 224350 | Private level 0 regional (CDP steering code) | 1 | cdp.udp
3 | 23 | Private level 0 regional (CDP steering code) | 1 | cdp.udp
Add...

10 Click **Add** to add a new Routing Entry.
The Add Routing Entry page appears. See Figure 51 "Add Routing Entry" (page 103).

Copyright © 2008, Nortel Networks

Figure 51
Add Routing Entry

Add Routing Entry (ccsip.com / innovatia / saintjohn / bcm20022)
DN type
Private level 0 regional (CDP steering code)
DN prefix
Route cost (1 -255)
Save

11 Enter the **DN prefix**.
This is the CDP DSC steering code.

12 Enter the **Route cost**.
The higher the number, the higher the cost. This is equivalent to Least Cost Routing.

13 Click **Save**.

—End—

Configuring collaborative servers

A Collaborative Server is a server in another network zone that can resolve requests when your NRS cannot find a match in its numbering plan database.

You can specify a list of Networking Routing Servers in different network zones in your NRS. The NRS Manager provides a utility for adding and viewing a list of NRSs (Collaborative Servers) in different network zones.

Step	Action
1	Log on to NRS Manager.
2	Select the **Configuration** tab
3	Click **set Standby DB view** to switch from active to standby database view.
4	Click **Collaborative Servers**.
5	Click **Add**. The Add Collaborative Server page appears. See Figure 52 "Add Collaborative Server" (page 104). This page may differ from the view shown here depending on the value you choose for the Domain type for collaborative server.

Copyright © 2008, Nortel Networks

Figure 52
Add Collaborative Server

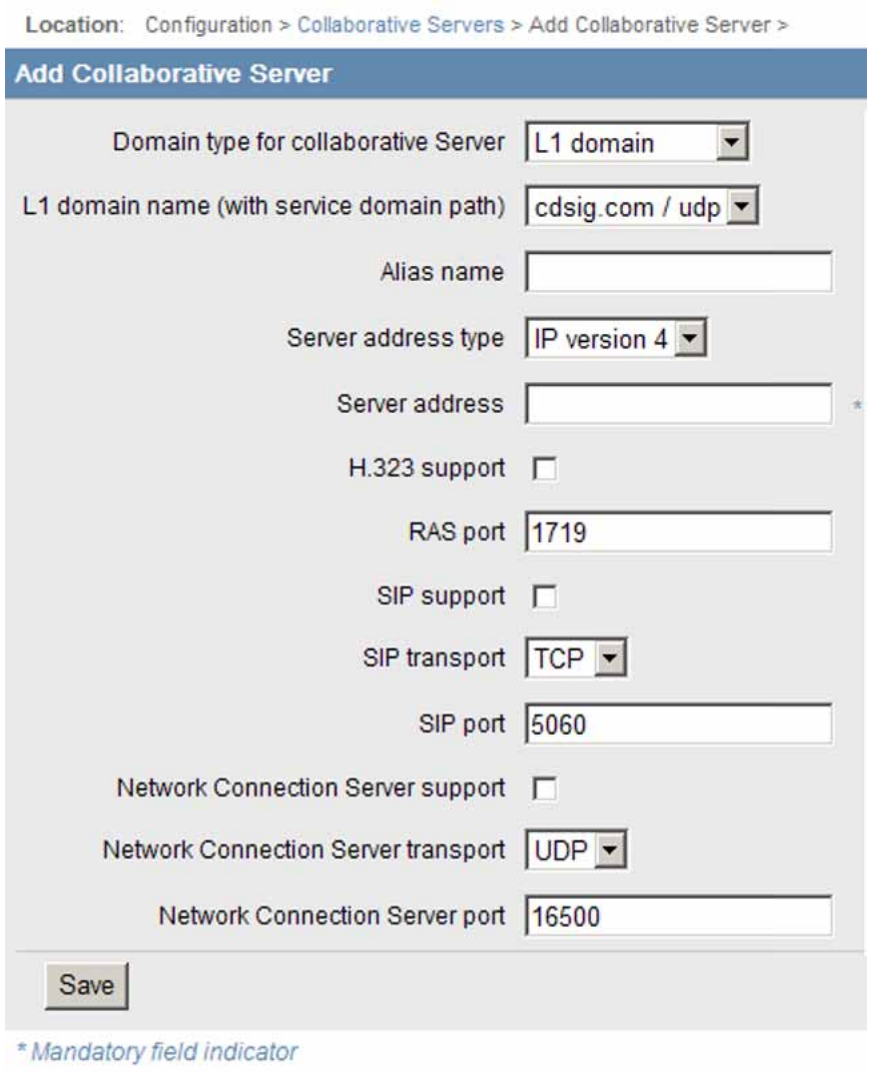

6 For **Domain type for collaborative Server**, select either **L0 domain** or **L1 domain**.

7 For the **L1** or **L0 domain name**, select the L1 or L0 domain name.

8 Enter the **Alias name** of the collaborative server.
The alias name must be alphanumeric and contain no spaces.

9 For **Server address type**, select **IP version 4**.

10 For **Server address**, type the server IP address.

Copyright © 2008, Nortel Networks

11 If the H.323 protocol is supported by the server, populate the following fields:

- **H.323 support** check box
- **RAS port**

12 If the SIP protocol is supported by the server, populate the following fields:

- **SIP support** check box
- **SIP transport** protocol
- **SIP port**

13 If Network Connection Service is supported by the server, populate the following fields:

- **Network Connection Server support** check box
- **Network Connection Server transport**
- **Network Connection Server port**

14 Click **Save**.
The Collaborative Servers page appears with the new server.

15 For redundancy purposes, perform this procedure again for the alternate NRS in the other network zone.

—End—

Updating the database

To save your entries, you must update the database.

Step	Action
1	Log on to NRS Manager.
2	Click the **Tools** tab.
3	Click the **Database Actions** tab. The Database Actions page appears, showing the Database State as Changed. See Figure 53 "Database Actions" (page 106).

Copyright © 2008, Nortel Networks

Figure 53
Database Actions

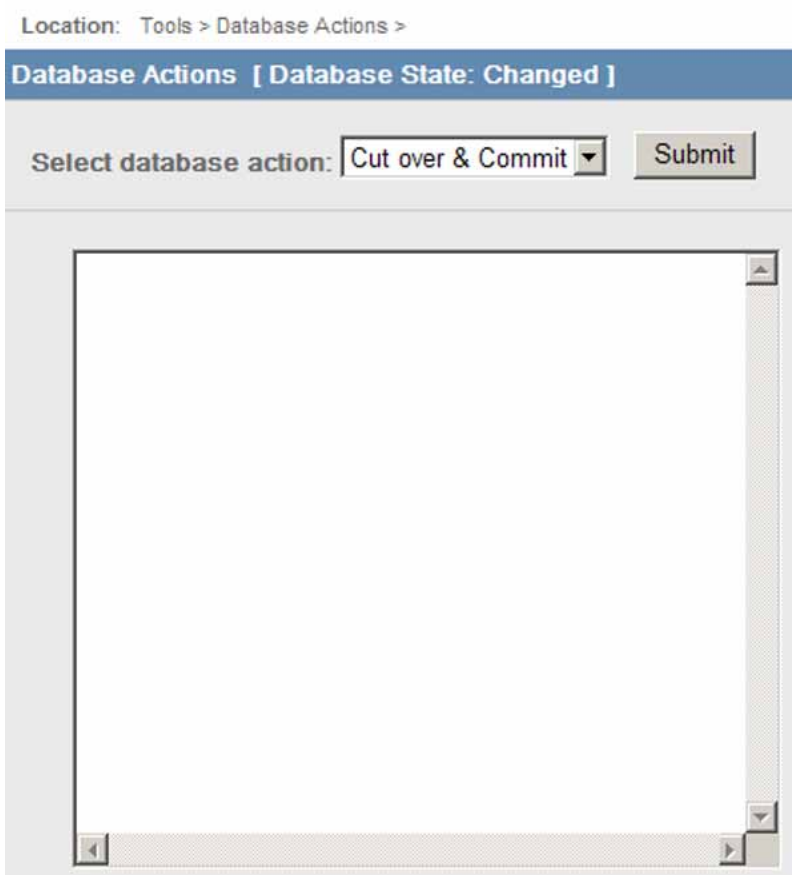
Location: Tools > Database Actions >
Database Actions [Database State: Changed]
Select database action:
Cut over & Commit
Submit

4 From the **Select database action** menu, select **Cut over & Commit**.

5 Click **Submit**.

—End—

Checking the status of registered endpoints

Perform the following procedure to check the status of registered endpoints.

Step	Action
1	Log on to NRS Manager.
2	Click the **Configuration** tab.
3	Select **Service Domains**. See Figure 46 "Service Domains" (page 92).

Copyright © 2008, Nortel Networks

4 Ensure that **Active DB View** is selected.

5 Click the number in the **# of gateway endpoints** column.

6 Click **Show**.
The Gateway Endpoints page appears. See Figure 54 "Gateway Endpoints" (page 107).

Figure 54
Gateway Endpoints

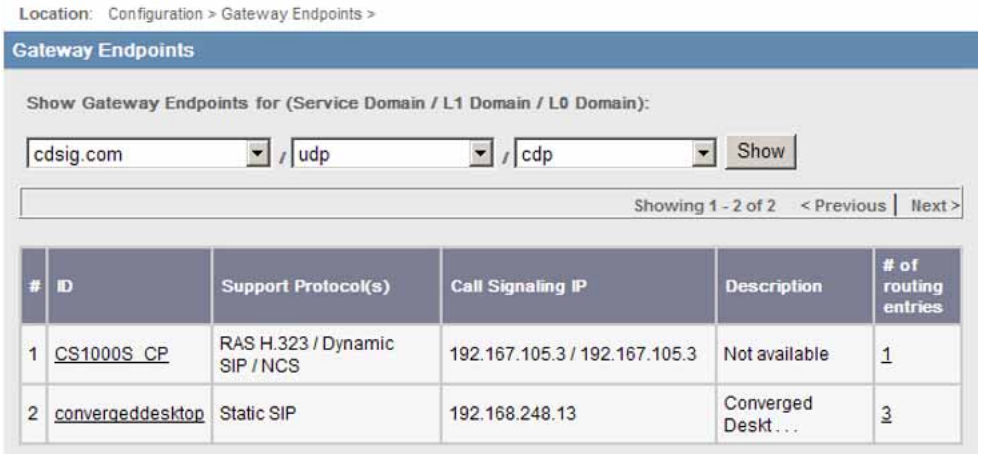
Location: Configuration > Gateway Endpoints >
Gateway Endpoints
Show Gateway Endpoints for (Service Domain / L1 Domain / L0 Domain):
cdsig.com / udp / cdp
Show
Showing 1 - 2 of 2 < Previous | Next >
ID Support Protocol(s) Call Signaling IP Description # of routing entries
1 CS1000S_CP RAS H.323 / Dynamic SIP / NCS 192.167.105.3 / 192.167.105.3 Not available 1
2 convergeddesktop Static SIP 192.168.248.13 Converged Deskt . . . 3

—End—

Checking the status of virtual D-channels

Perform the following procedure to check the status of virtual D-channels.

Step	Action
1	Log on to Element Manager.
2	Select **Routes and Trunks > D-Channels**.
3	Select **D-Channel Diagnostics (LD 96)**. The D-Channel Diagnostics page appears. See Figure 55 "D-Channel Diagnostics" (page 108).

Copyright © 2008, Nortel Networks

Figure 55
D-Channel Diagnostics

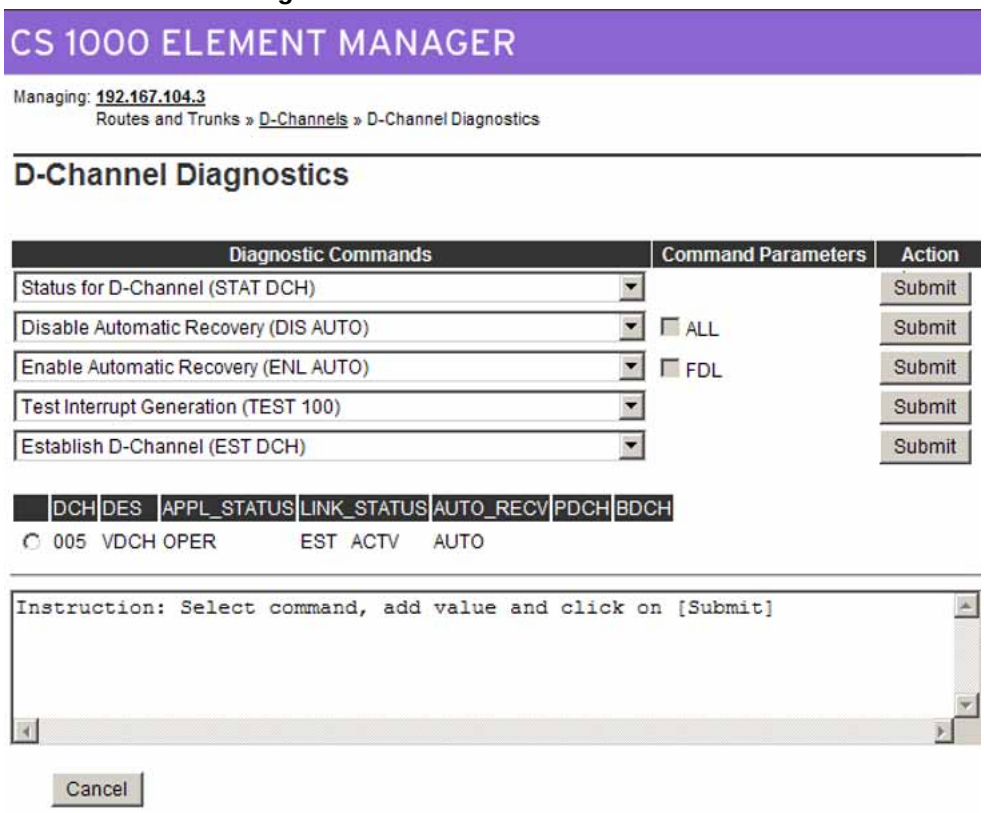

4 Under **Diagnostic Commands**, select **Status for D-Channel (STAT DCH)**.

5 Click **Submit**.

6 Check that the D-Channel is operational, established, and active.

—End—

Checking the status of virtual trunks

Perform the following procedure to check the status of virtual trunks.

Step	Action
1	Log on to Element Manager.
2	Select **System > IP Network > Maintenance and Reports**.
3	Expand the **Node ID** heading.

Copyright © 2008, Nortel Networks

4 Click **GEN CMD** for the switch.
The General Commands page appears. See Figure 56 "General Commands" (page 109).

Figure 56
General Commands

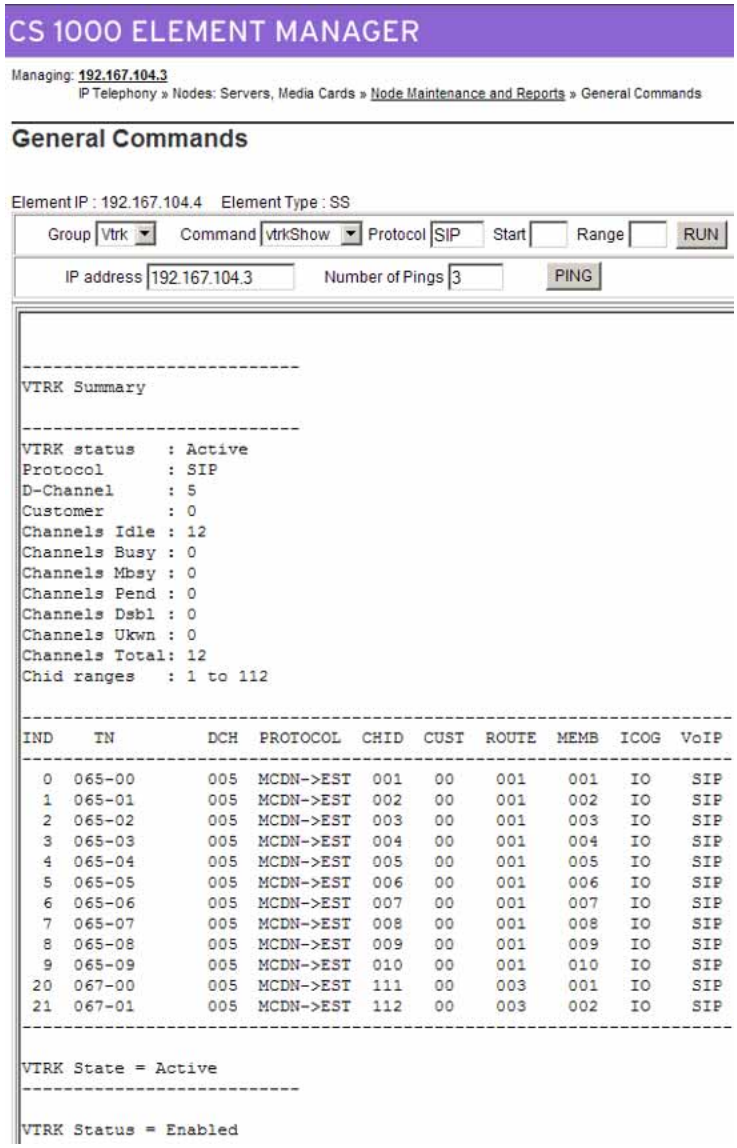
CS 1000 ELEMENT MANAGER
Managing: 192.167.104.3
IP Telephony » Nodes: Servers, Media Cards » Node Maintenance and Reports » General Commands
General Commands
Element IP : 192.167.104.4 Element Type : SS
Group Vtrk Command vtrkShow Protocol SIP Start Range RUN
IP address 192.167.104.3 Number of Pings 3 PING
VTRK Summary
VTRK status : Active
Protocol : SIP
D-Channel : 5
Customer : 0
Channels Idle : 12
Channels Busy : 0
Channels Mbsy : 0
Channels Pend : 0
Channels Dsbl : 0
Channels Ukwn : 0
Channels Total: 12
Chid ranges : 1 to 112
IND TN DCH PROTOCOL CHID CUST ROUTE MEMB ICOG VoIP
0 065-00 005 MCDN->EST 001 00 001 001 IO SIP
1 065-01 005 MCDN->EST 002 00 001 002 IO SIP
2 065-02 005 MCDN->EST 003 00 001 003 IO SIP
3 065-03 005 MCDN->EST 004 00 001 004 IO SIP
4 065-04 005 MCDN->EST 005 00 001 005 IO SIP
5 065-05 005 MCDN->EST 006 00 001 006 IO SIP
6 065-06 005 MCDN->EST 007 00 001 007 IO SIP
7 065-07 005 MCDN->EST 008 00 001 008 IO SIP
8 065-08 005 MCDN->EST 009 00 001 009 IO SIP
9 065-09 005 MCDN->EST 010 00 001 010 IO SIP
20 067-00 005 MCDN->EST 111 00 003 001 IO SIP
21 067-01 005 MCDN->EST 112 00 003 002 IO SIP
VTRK State = Active
VTRK Status = Enabled

5 For **Group**, select **Vtrk**.

6 For **Command**, select **vtrkShow**.

7 For **Protocol**, type **H323**.

8 Click **Run**.

Copyright © 2008, Nortel Networks

The Virtual Trunk status appears.

9 Check each IP Phone manually (that is, not through Element Manager). At the **DEF GW** option, verify that the IP address is the same as the T-LAN Gateway of that system.
If the phones ring and have dial tone but there is no speech path, the Default Gateway is 0.0.0.0 and is not operational.

—End—

Copyright © 2008, Nortel Networks

BCM 200/400 configuration

This chapter describes configuration procedures for the Business Communications Manager (BCM) 200 and 400 systems.

Element Manager as viewed on your system may differ slightly from the screens shown in this chapter because you can customize the column display in Element Manager.

BCM 200/400 configuration procedures

The sequence of BCM 200/400 configuration procedures is as follows:

- "Configuring incoming VoIP trunks" (page 111)
- "Verifying system license and keycodes" (page 112)
- "Configuring VoIP trunk media parameters" (page 113)
- "Configuring local Gateway parameters" (page 116)
- "Configuring target lines" (page 121)
- "Configuring VoIP lines" (page 124)

Configuring incoming VoIP trunks

Perform the following procedure to configure incoming VoIP trunks.

Step	Action
1	Log on to Element Manager.
2	In the **Task Navigation Panel**, select the **Configuration** tab.
3	Select **System > Keycodes**. See Figure 57 "Keycodes" (page 112).

Copyright © 2008, Nortel Networks

Figure 57
Keycodes

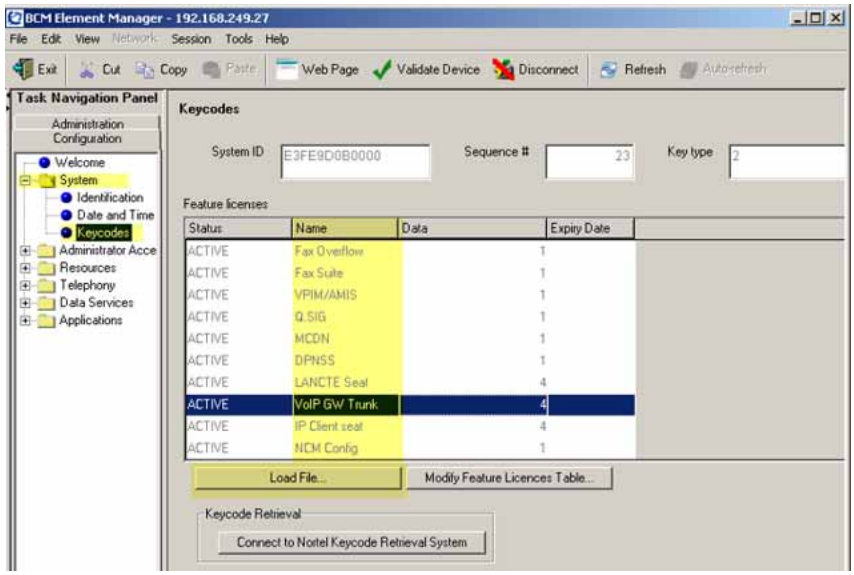

4 Load new Keycodes by loading a new keycode file or connecting to Nortel's Keycode Retrieval System (KRS).
For more information about keycodes and keycode retrieval, see *Keycode Installation Guide* (NN40010-301).

—End—

Verifying system license and keycodes

Perform the following procedure to verify system license and keycodes.

Step	Action
1	Log on to Element Manager.
2	In the **Task Navigation Panel**, select the **Configuration** tab.
3	Select **System > Keycodes**. See Figure 57 "Keycodes" (page 112).
4	In the **Name** column, scroll down to **VoIP GW Trunk**. The number of license keys you have are listed in the Data column.

—End—

Copyright © 2008, Nortel Networks

Configuring VoIP trunk media parameters

Perform the following procedure to configure VoIP trunk media parameters.

Step	Action
1	Log on to Element Manager.
2	In the **Task Navigation Panel**, select the **Configuration** tab.
3	Select **Resources > Telephony Resources**. See Figure 58 "Telephony Resources" (page 113).

Figure 58
Telephony Resources

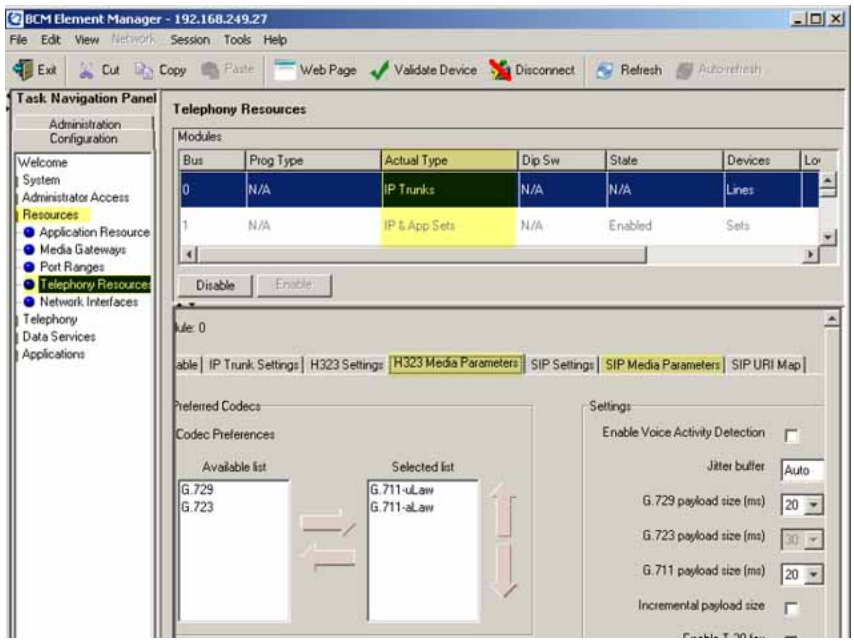

4	In the **Modules** panel, select the line where the **Module Type** column is set to **IP Trunks**.
5	Select the **H.323 Media Parameters** or **SIP Media Parameters** tab.
6	Enter the information that supports your system. Ensure that these settings are consistent with the other systems on your network. Refer to Table 8 "H.323 Media Parameters fields" (page 114) and Table 9 "SIP Media Parameters fields" (page 115) for a description of the parameters.

—End—

Copyright © 2008, Nortel Networks

Table 8
H.323 Media Parameters fields

Field	Value	Description
Preferred Codecs	G.711 -uLaw G.711 -aLaw G.729 G.723	Add codecs to the Selected list and order them in the order in which you want the system to attempt to use them. The system attempts to use the codecs in top-to-bottom sequence. **Performance note:** Codecs on all networked BCMs must be consistent to ensure the proper functionality of interacting features such as Transfer and Conference. Systems running BCM Release 3.5 or later allow codec negotiation and renegotiation to accommodate inconsistencies in codec settings over VoIP trunks.
Enable Voice Activity Detection	<check box>	Voice Activity Detection (VAD), also known as silence suppression, identifies periods of silence in a conversation and stops sending IP speech packets during those periods. In a typical telephone conversation, most of the conversation is half-duplex, meaning that one person is speaking while the other is listening. If VAD is enabled, no voice packets are sent from the listener end. This greatly reduces bandwidth requirements. G.723.1 and G.729 support VAD. G.711 does not support VAD. **Performance note:** VAD on all networked BCMs and IPT systems must be consistent to ensure functionality of features such as Transfer and Conference. The Payload size on the IPT must be set to 30ms.
Jitter Buffer	Auto None Small Medium Large	Select the size of jitter buffer for your system.
G.729 payload size (ms) **G.723 payload size (ms)** **G.711 payload size (ms)**	10,20,30,40,50,60 30 10,20,30,40,50,60	Set the maximum required payload size, per codec, for the VoIP calls sent over H.323 trunks. **Note:** Payload size can also be set for Nortel IP telephones. See *BCM50 Networking Configuration Guide* (NN40020-603).

Copyright © 2008, Nortel Networks

Field	Value	Description
Incremental payload size	<check box>	When enabled, the system advertises a variable payload size (40, 30, 20, 10 ms).
Enable T.38 fax	<check box>	When enabled, the system supports T.38 fax over IP. **Caution:** Fax tones broadcast through a telephone speaker may disrupt calls at other telephones using VoIP trunks in the vicinity of the fax machine. To minimize the possibility of your VoIP calls being dropped due to fax tone interference: • place the fax machine away from other telephones • turn the fax machine's speaker volume to the lowest level, or off, if available
Force G.711 for 3.1k Audio	<check box>	When enabled, the system forces the VoIP trunk to use the G.711 codec for 3.1k audio signals, such as modem or TTY machines. **Note:** You also can use this setting for fax machines if T.38 fax is not enabled on the trunk.

Table 9
SIP Media Parameters fields

Field	Value	Description
Preferred Codecs	G.711 -uLaw G.711 -aLaw G.729 G.723	Add codecs to the Selected list and order them in the order in which you want the system to attempt to use them. The system attempts to use the codecs in a top-to-bottom sequence. **Performance note:** Codecs on all networked BCMs must be consistent to ensure the proper functionality of interacting features such as Transfer and Conference. Systems running BCM Release 3.5 or later allow codec negotiation and renegotiation to accommodate inconsistencies in codec settings over VoIP trunks.

Copyright © 2008, Nortel Networks

Field	Value	Description
Enable Voice Activity Detection	<check box>	Voice Activity Detection (VAD), also known as silence suppression, identifies periods of silence in a conversation and stops sending IP speech packets during those periods. In a typical telephone conversation, most of the conversation is half-duplex, meaning that one person is speaking while the other is listening. If VAD is enabled, no voice packets are sent from the listener end. This greatly reduces bandwidth requirements. G.723.1 and G.729 support VAD. G.711 does not support VAD. **Performance note:** VAD on all networked BCMs and IPT systems must be consistent to ensure functionality of features such as Transfer and Conference. The Payload size on the IPT must be set to 30ms.
Jitter Buffer	Auto None Small Medium Large	Select the size of jitter buffer for your system.
G.729 payload size (ms) **G.723 payload size (ms)** **G.711 payload size (ms)**	10,20,30,40,50,60 30 10,20,30,40,50,60	Set the maximum required payload size, per codec, for the VoIP calls sent over H.323 trunks. **Note:** Payload size can also be set for Nortel IP telephones. See *BCM50 Networking Configuration Guide* (NN40020-603).
Enable T.38 fax	<check box>	When enabled, the system supports T.38 fax over IP. **Caution:** Fax tones broadcast through a telephone speaker may disrupt calls at other telephones using VoIP trunks in the vicinity of the fax machine. To minimize the possibility of your VoIP calls being dropped due to fax tone interference: • place the fax machine away from other telephones • turn the fax machine's speaker volume to the lowest level, or off, if available

Configuring local Gateway parameters

Perform the following procedure to configure local Gateway parameters.

Copyright © 2008, Nortel Networks

Step	Action
1	Log on to Element Manager.
2	In the **Task Navigation Panel**, select the **Configuration** tab.
3	Select **Resources > Telephony Resources**.
4	In the **Modules** panel, select the line in which the **Module Type** column is set to **IP Trunks**. See Figure 58 "Telephony Resources" (page 113).
5	Select the **IP Trunk Settings** tab and enter the information that supports your system. See Figure 59 "IP Trunk Settings" (page 117). Refer to Table 10 "IP Trunk Settings fields" (page 117) for information about the IP Trunk Settings fields.

Figure 59
IP Trunk Settings

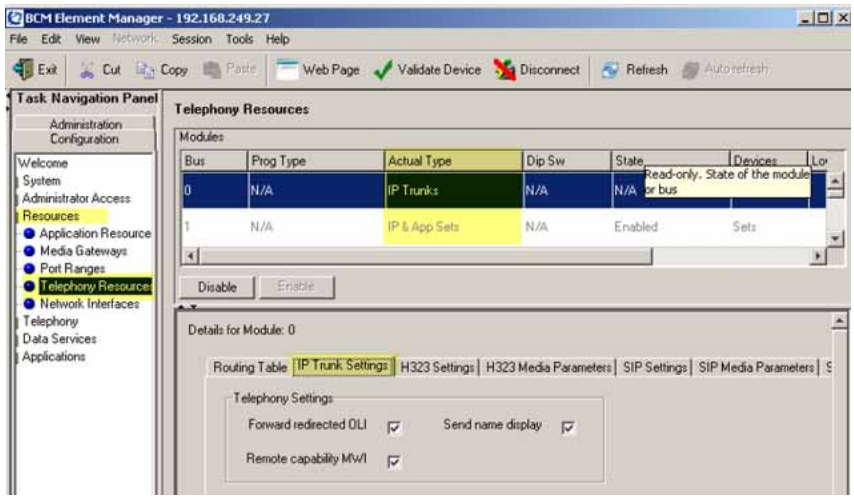

Table 10
IP Trunk Settings fields

Field	Value	Description
Forward redirected OLI	<check box>	If enabled, the OLI of an internal telephone is forwarded over the VoIP trunk when a call is transferred to an external number over the private VoIP network. If disabled, only the CLID of the transferred call is forwarded.

Copyright © 2008, Nortel Networks

Field	Value	Description
Send name display	<check box>	If enabled, the telephone name is sent with outgoing calls to the network.
Remote capability MWI	<check box>	This setting must coordinate with the functionality of the remote system hosting remote voice mail.

6 For H.323 VoIP trunks, select the **H.323 Settings** tab.
See Figure 60 "H.323 Settings" (page 118).

Figure 60
H.323 Settings

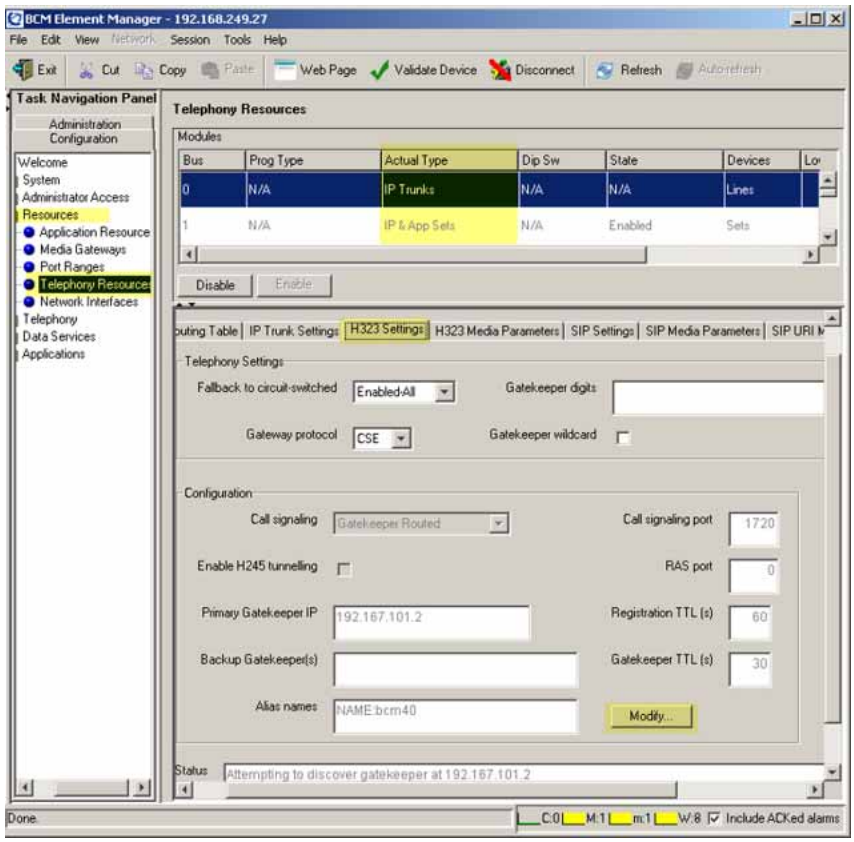

7 When implementing your dialing plan, in the **H.323 Settings** tab, select a value for **Fall back to circuit-switched**. This determines how the system handles calls if the IP network cannot be used.

8 For **Gateway protocol**, select **CSE**.

9 Scroll down to **Alias names** and click **Modify**.
The Modify Call Signaling Settings page appears.

10 Enter the information that supports your system.

Copyright © 2008, Nortel Networks

Applying the changes made to the Call Signaling Settings causes all H.323 calls to be dropped. It is recommended that you make changes to the Call Signaling Settings during off-peak hours or a scheduled maintenance window.
Refer to Table 11 "H.323 Call Signaling Settings fields" (page 119).

Table 11
H.323 Call Signaling Settings fields

Field	Value	Description
Call Signaling	Direct	Call signaling information is passed directly between H.323 endpoints. You must set up remote Gateways.
	Gatekeeper Resolved	All call signaling occurs directly between H.323 endpoints. This means that the Gatekeeper resolves the phone numbers into IP addresses, but the Gatekeeper is not involved in call signaling.
	Gatekeeper Routed	Gatekeeper Routed uses a Gatekeeper for call setup and control. In this method, call signaling is directed through the Gatekeeper.
	Gatekeeper Routed no\	Use this setting for a NetCentrex Gatekeeper. With this setting, the system routes all calls through the Gatekeeper but does not use any of the Gatekeeper Registration and Admission Services (RAS). Choose this option if RAS is not enabled on the NRS.
Call Signaling Port	<port value>	If VoIP applications are installed that require nonstandard call signaling ports, enter the port number here. Port number 0 means that the system uses the first available port. The default port for call signaling is 1720.
RAS Port	<port value>	If the VoIP application requires a nonstandard RAS port, enter the port number here. Port number 0 means that the system uses the first available port.
Enable H245 tunneling	<check box>	Select this field to allow H.245 messages within H.225. Restart the VoIP service for this feature to take effect.
Primary Gatekeeper IP	<IP address>	Fill in this field only if the network is controlled by a Gatekeeper. This is the IP address of the primary Gatekeeper (TLAN IP address).

Copyright © 2008, Nortel Networks

Field	Value	Description
Backup Gatekeeper (s)	<IP address>	NetCentrex Gatekeeper does not support RAS. Any backup Gatekeepers must be entered in this field. Gatekeepers that use RAS can provide a list of backup Gatekeepers for the endpoint to use in the event of a primary Gatekeeper failure.
Alias names	NAME:<alias name>	Enter the alias names of the BCM required to direct call signals to your system. **Note:** The Alias name is case sensitive. It must match the name configured in NRS.
Registration TTL(s)	<numeric value>	Specifies the keep-alive interval.

11 For SIP trunks, select the **SIP Settings** tab. See Figure 61 "SIP Settings" (page 120).

Figure 61
SIP Settings

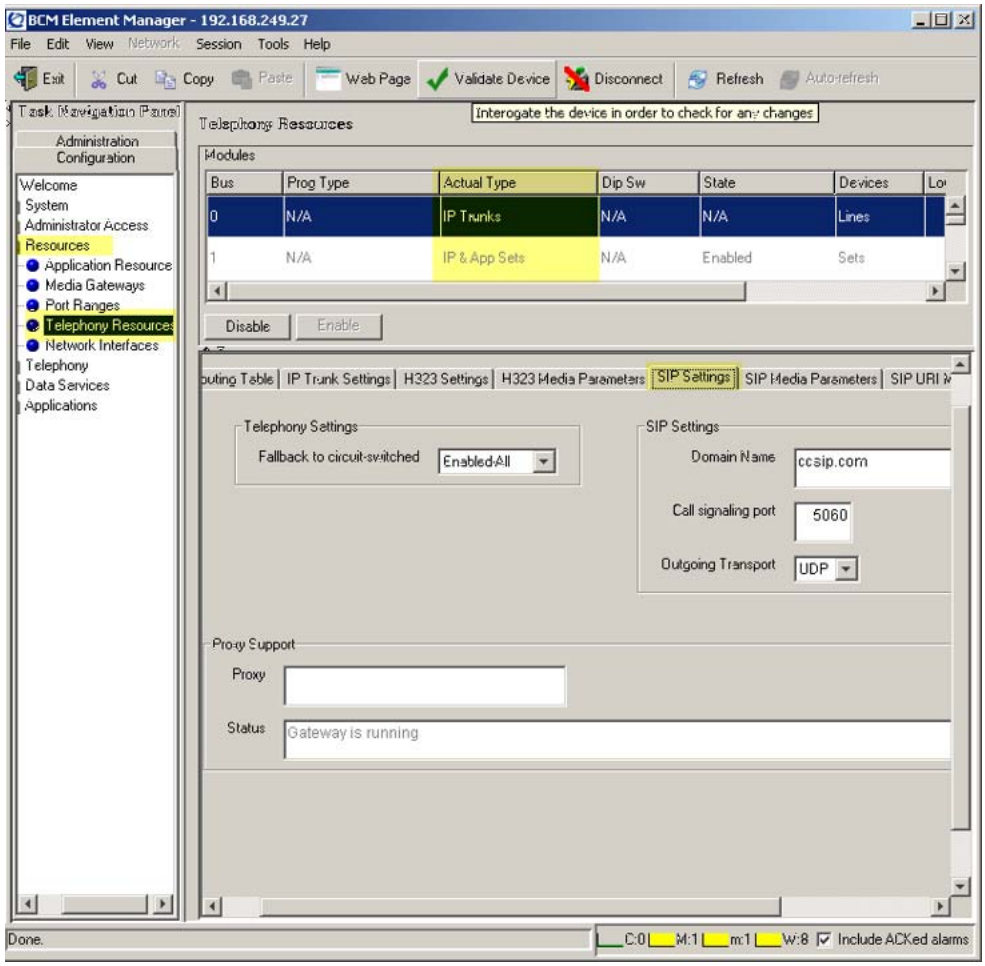

Copyright © 2008, Nortel Networks

12 Enter the information that supports your system.
Refer to Table 12 "SIP Settings fields" (page 121) for more information.

Table 12
SIP Settings fields

Field	Value	Description
Fallback to Circuit-Switched	Disabled	Defines how you want the system to handle calls that the system fails to send over the VoIP trunk. Enabled-TDM enables fallback for calls originating on digital telephones. This is useful if your IP telephones are connected remotely, on the public side of the BCM network, because PSTN fallback is unlikely to result in better quality of service.
	Enabled-TDM	
	Enabled-All	
Domain Name		Type the domain name of the SIP network.
Call Signaling Port	<port value>	If VoIP applications are installed that require nonstandard call signaling ports, enter the port number here. Port number 0 means that the system uses the first available port.
Outgoing Transport	UDP	
	TCP	
Proxy		If entered, all SIP calls originate to this address.
Status	Read Only	This field displays the current status of the Gatekeeper.

—End—

Configuring target lines

Target lines are virtual communication paths between trunks and telephones on the BCM system. They are incoming lines only and cannot be selected for outgoing calls or networking applications.

Step	Action
1	Log on to Element Manager.
2	In the **Task Navigation Panel**, select the **Configuration** tab.
3	Select **Telephony > Lines > Target Lines**.
4	Highlight the individual line you wish to configure.

Copyright © 2008, Nortel Networks

5 Select the **Parameters** tab and enter the appropriate information for your network.
See Figure 62 "Parameters" (page 122). Refer to Table 13 "Parameters fields" (page 122) for configuration information.

Figure 62
Parameters

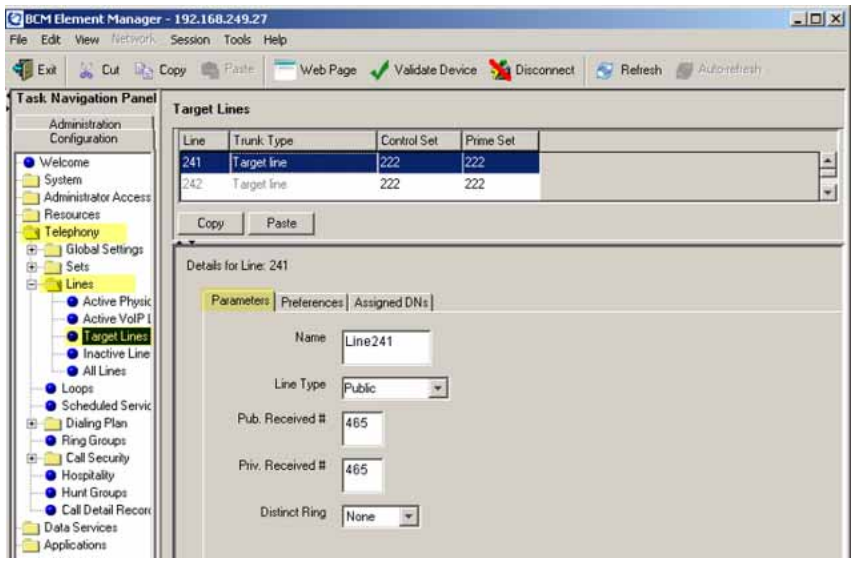

Table 13
Parameters fields

Field	Value	Description
Line Type	Public DN:*	If the line is to be shared among telephones, select Public. If the line is only assigned to one telephone, select DN:*:.
Pub. Received #		Confirm the existing number or enter a public received number (PSTN DID or PRI trunks) that the system uses to identify calls from the public network to the target line. The public received number cannot be the same as the beginning digits of a line pool access code or destination code.
Priv. Received #		If private network trunks (PRI or VoIP trunks) are configured, enter a private received number. The private received number specifies the digits the system uses to identify calls from the private network to a target line. This number is usually the same as the DN.
Distinct Ring	2, 3, 4, or None	If you want this line to have a special ring, select a ring pattern.

Copyright © 2008, Nortel Networks

6 Select the **Preferences** tab and enter the appropriate information for your network.
See Figure 63 "Preferences" (page 123). Refer toTable 14 "Preferences fields" (page 123) for configuration information.

Figure 63
Preferences

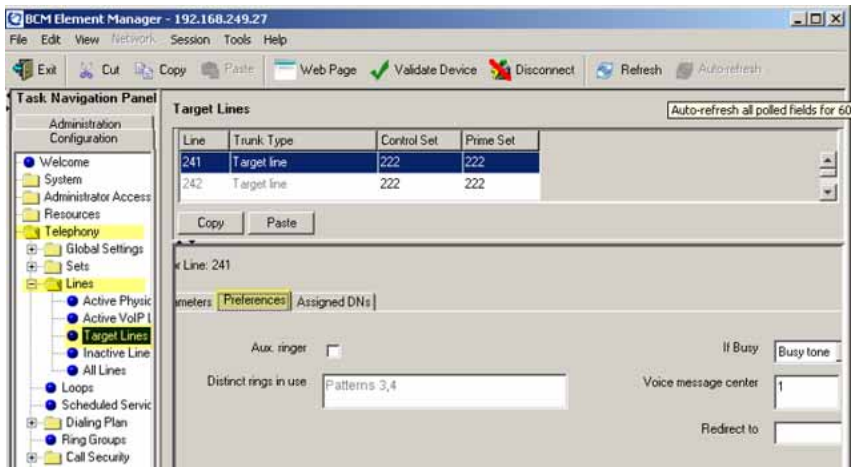

Table 14
Preferences fields

Field	Value	Description
Aux. ringer	<check box>	If your system is equipped with an external ringer, you can enable this setting so that this line rings at the external ringer.
If Busy	Busy tone To Prime	To automatically direct calls to the prime telephone, select To prime. Otherwise, select Busy tone.
Distinct rings in use	Read only	
Voice message center		If the system is using a remote voice mail, select the center configured with the contact number.
Redirect to		To automatically direct calls out of the system to a specific telephone, such as a head office answer attendant, enter that remote number here. Ensure that you include the proper routing information.

7 Select the **Assigned DNs** tab.
See Figure 64 "Assigned DNs" (page 124).

Copyright © 2008, Nortel Networks

Figure 64
Assigned DNs

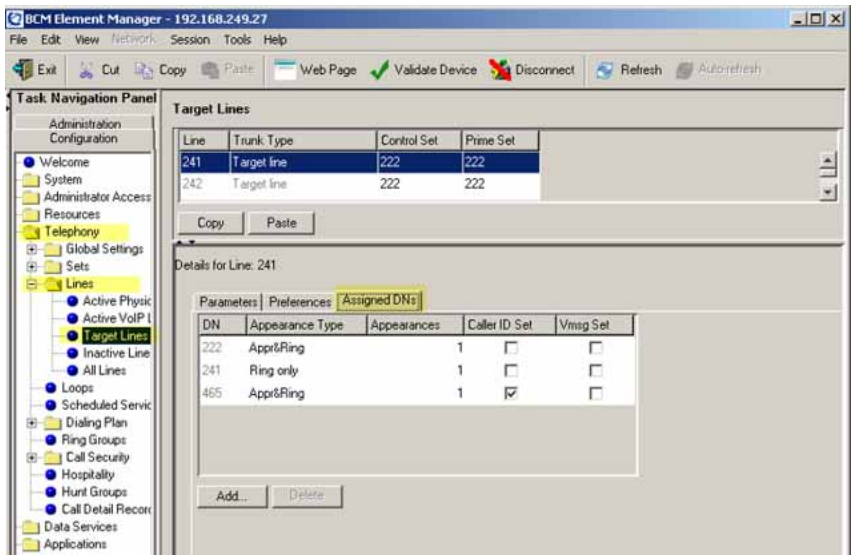

8 Edit the listed DNs, or click **Add** to add a DN as required.

9 Enter the appropriate information for your network.
Refer to Table 18 "Assigned DNs fields" (page 129) for configuration information.

—End—

Configuring VoIP lines

Voice over IP (VoIP) lines simulate traditional Central Office (CO) lines. VoIP lines transmit data over an IP network rather than over physical lines.

Step	Action
1	Log on to Element Manager.
2	In the **Task Navigation Panel**, select the **Configuration** tab.
3	Select **Telephony > Lines > All Lines**.
4	Highlight the individual line you wish to configure.
5	Select the **Parameters** tab. See Figure 65 "VoIP lines" (page 125).

Copyright © 2008, Nortel Networks

Figure 65
VoIP lines

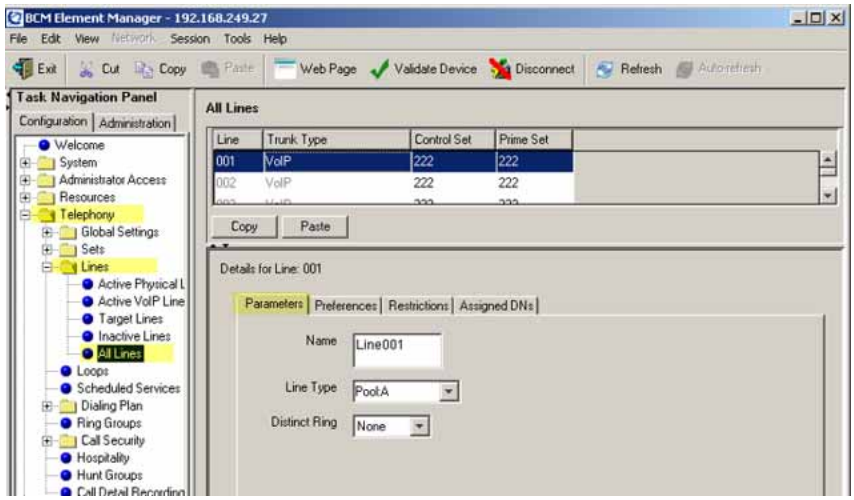

6 Configure the Parameters tab appropriately for your network. Refer to Table 15 "VoIP line descriptions" (page 125) for configuration information.

Table 15
VoIP line descriptions

Field	Value	Description
Line	001-060	Unique line number.
Trunk Type	VoIP	Ensure that the trunk type is set to VoIP when configuring VoIP lines.
Control Set		Identify a DN if you are using this line with scheduling. To change the DN, double-click the Control Set DN. For VoIP trunks, it is recommended that the Control Set be set to None because these are virtual trunks. Ensure that the VoIP trunk is assigned to a line pool.
Prime Set		Use the Prime Set if you want the line to be answered at another telephone when the line is not answered at the target telephone. To change the Prime set, double-click the Prime set DN. For VoIP trunks, it is recommended that the Prime Set be set to None because these are virtual trunks. Ensure that the VoIP trunk is assigned to a line pool.
Name		Identify the line in a meaningful way.

Copyright © 2008, Nortel Networks

Field	Value	Description
Line Type		Defines how the line is used in relation to other lines in the system.
	Public	If the line is to be shared among telephones, set to Public.
	DN:*	If the line is assigned to only one telephone, set to DN:*.
	Pool [A to O]	If you are using routing, put the line into line pool (A to F). If you are using line pools, configure the target lines. If your system uses both H.323 and SIP trunks, assign H.323 trunks to one pool and SIP trunks to another.
Distinct Ring	2, 3, 4, or None	For trunks assigned to line pools, set the Distinct Ring pattern to None.

7 Select the **Preferences** tab.
See Figure 66 "Preferences" (page 126).

Figure 66
Preferences

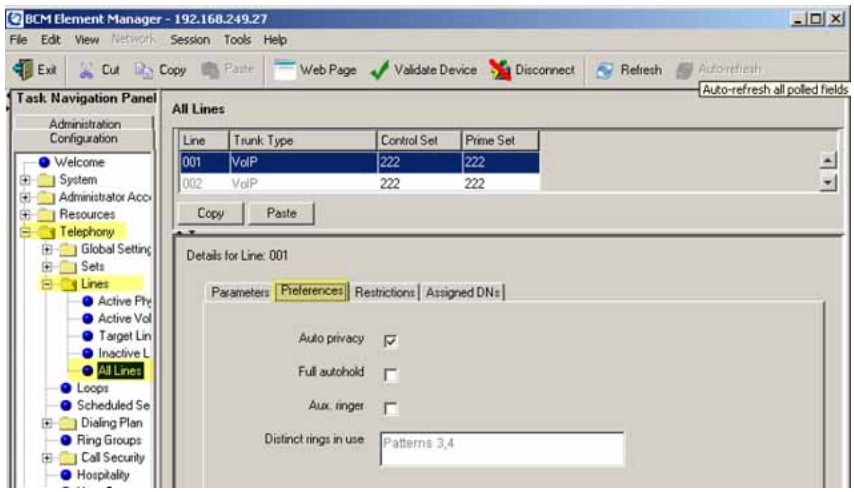

8 Configure the Preferences tab appropriately for your network. Refer to Table 16 "Preferences fields" (page 127) for configuration information.

Copyright © 2008, Nortel Networks

Table 16
Preferences fields

Field	Value	Description
Auto privacy	<check box>	Defines whether one BCM user can select a line in use at another telephone to join an existing call. For more information, see *BCM 4.0 Device Configuration Guide* (N0060600).
Full autohold	<check box>	Enables or disables Full autohold. When enabled, if a caller selects an idle line but does not dial any digits, that line is automatically placed on hold if the caller selects another line. Change the default setting only if Full autohold is required for a specific application.
Aux. ringer	<check box>	If your system is equipped with an external ringer, you can enable this setting so that this line rings at the external ringer.
Distinct rings in use	Read only	Indicates whether a special ring is assigned.

9 Select the **Restrictions** tab.
See Figure 67 "Restrictions" (page 127).

Figure 67
Restrictions

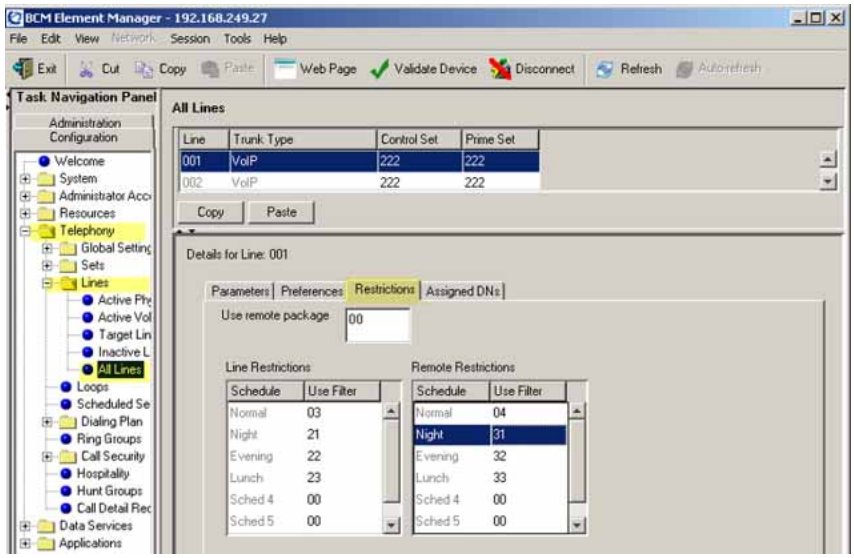

10 Configure the Restrictions tab appropriately for your network.
Refer to Table 17 "Restrictions fields" (page 128) for configuration information.

Copyright © 2008, Nortel Networks

Table 17
Restrictions fields

Field	Value	Description
Use remote package	< package #>	If the line is used to receive external calls or calls from other nodes on the private network, ensure that you indicate a remote package that provides only the availability that you want for external callers. This attribute is typically used for tandeming calls.
Schedule	Default: Normal, Night, Evening, Lunch, Sched 4, Sched 5, Sched 6	
Line Restrictions - Use Filter	<00-99>	Enter the restriction filter number that applies to each schedule. These settings control outgoing calls.
Remote Restrictions - Use Filter	<00-99>	Enter the restriction filter that applies to each schedule. These settings provide call controls for incoming calls over a private network or from a remote user dialing in over PSTN.

11 Select the **Assigned DNs** tab.
See Figure 68 "Assigned DNs" (page 128).

Figure 68
Assigned DNs

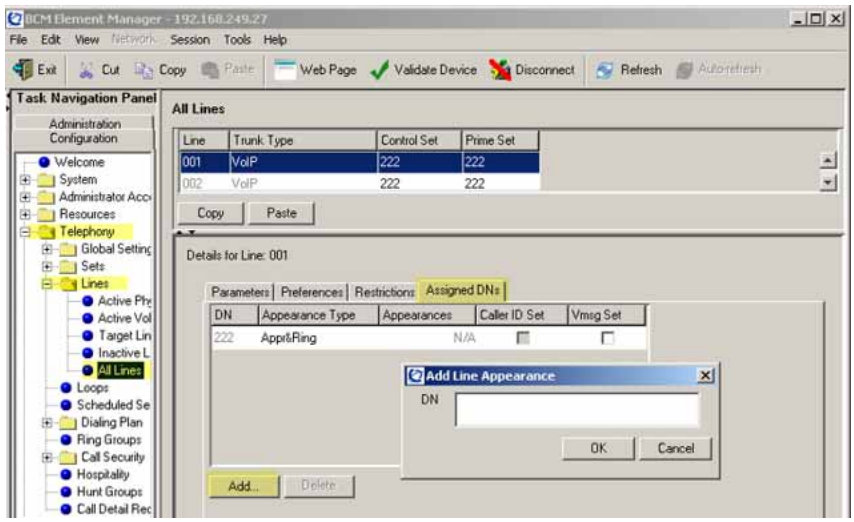

12 Click **Add** to add the Target Line DN.

13 Enter the appropriate information for your network.

Copyright © 2008, Nortel Networks

Refer to Table 18 "Assigned DNs fields" (page 129) for configuration information.

Table 18
Assigned DNs fields

Field	Value	Description
DN		Unique number
Appearance Type	Ring only Appr&Ring Appr only	Select Appr Only or Appr&Ring if the telephone has an available button. Otherwise select Ring Only.
Appearances		Target lines can have more than one appearance to accommodate multiple calls. For telephones that have these lines set to Ring Only, set to None.
Caller ID Set	<check box>	When enabled, displays caller ID for calls coming in over the target line.
Vmsg Set	<check box>	When enabled, an indicator appears on the telephone when a message is waiting from a remote voice mail system. Check with your system administrator for the system voice mail setup before changing this parameter.

—End—

Copyright © 2008, Nortel Networks

Copyright © 2008, Nortel Networks

BCM50 configuration

This chapter describes configuration procedures for the Business Communications Manager 50 (BCM50) system.

Element Manager as viewed on your system may differ slightly from the screens shown in this chapter because you can customize the column display in Element Manager.

BCM50 configuration procedures

The sequence of BCM50 configuration procedures is as follows:

- "Configuring incoming VoIP trunks" (page 131)
- "Verifying system license and keycodes" (page 132)
- "Configuring VoIP trunk media parameters" (page 133)
- "Configuring local Gateway parameters" (page 137)
- "Configuring VoIP lines" (page 141)
- "Configuring target lines" (page 145)

Configuring incoming VoIP trunks

Perform the following procedure to configure incoming VoIP trunks.

Configuring incoming VoIP trunks

Step	Action
1	Log on to Element Manager.
2	In the **Task Navigation Panel**, select the **Configuration** tab.
3	Select **System > Keycodes**. See Figure 69 "Keycodes" (page 132).

Copyright © 2008, Nortel Networks

Figure 69
Keycodes

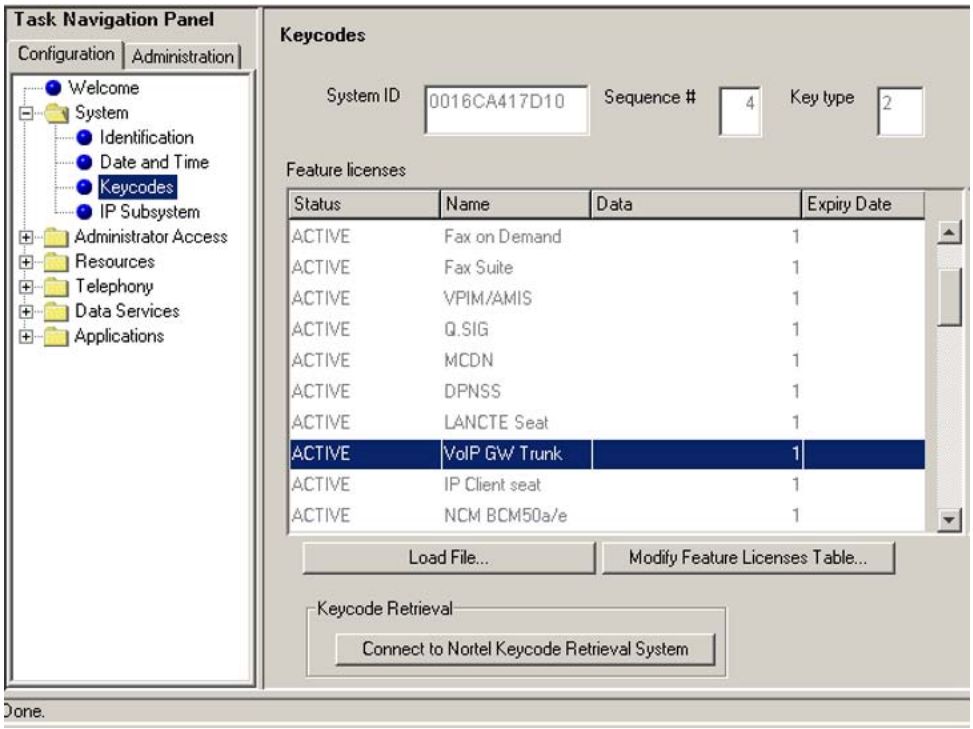

4 Load new Keycodes by loading a new keycode file or connecting to Nortel's Keycode Retrieval System (KRS).
For more information about keycodes and keycode retrieval, see *Keycode Installation Guide* (NN40010-301).

—End—

Verifying system license and keycodes

Perform the following procedure to verify system license and keycodes.

Verifying system license and keycodes

Step	Action
1	Log on to Element Manager.
2	In the **Task Navigation Panel**, select the **Configuration** tab.
3	Select **System > Keycodes**. See Figure 69 "Keycodes" (page 132).

Copyright © 2008, Nortel Networks

4 In the **Name** column, scroll down to **VoIP GW Trunk**. The number of license keys you have are listed in the Data column.

—End—

Configuring VoIP trunk media parameters

Perform the following procedure to configure VoIP trunk media parameters.

Configuring VoIP trunk media parameters

Step	Action
1	Log on to Element Manager.
2	In the **Task Navigation Panel**, select the **Configuration** tab.
3	Select **Resources > Telephony Resources**. See Figure 70 "Telephony Resources" (page 133).

Figure 70
Telephony Resources

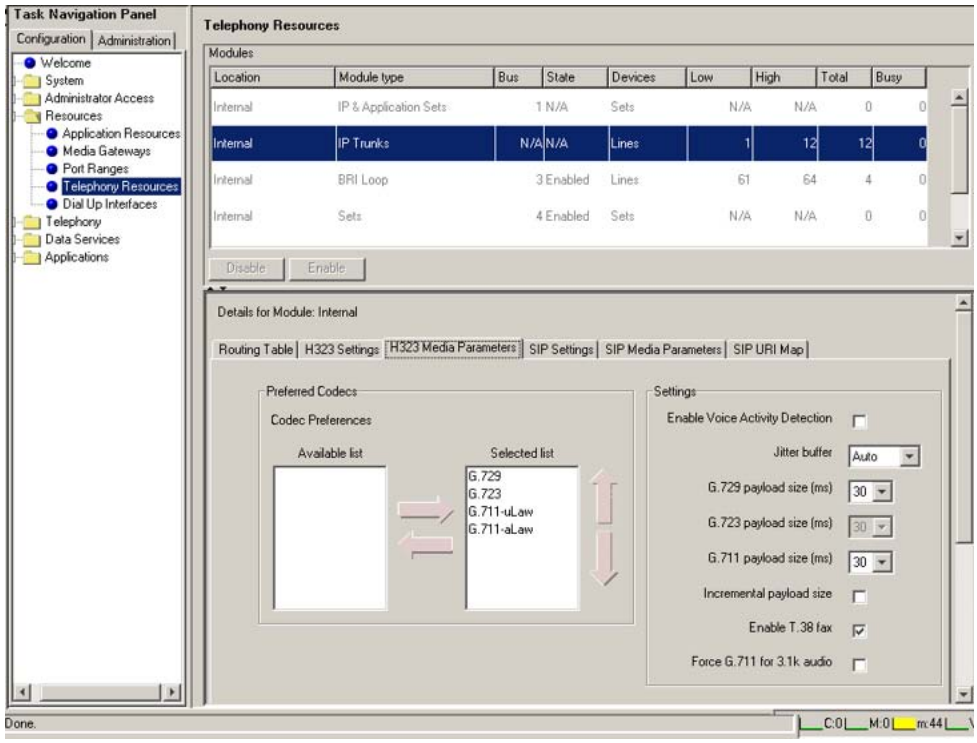

4 In the **Modules** panel, select the line where the **Module Type** column is set to **IP Trunks**.

Copyright © 2008, Nortel Networks

5 Select the **H.323 Media Parameters** or **SIP Media Parameters** tab.

6 Enter the information that supports your system.
Ensure that these settings are consistent with the other systems on your network.
Refer to Table 19 "H.323 Media Parameters fields" (page 134) and Table 20 "SIP Media Parameters fields" (page 135) for a description of the parameters.

—End—

Table 19
H.323 Media Parameters fields

Field	Value	Description
Preferred Codecs	G.711 -uLaw G.711 -aLaw G.729 G.723	Add codecs to the Selected list and order them in the order in which you want the system to attempt to use them. The system attempts to use the codecs in top-to-bottom sequence. **Performance note:** Codecs on all networked BCMs must be consistent to ensure the proper functionality of interacting features such as Transfer and Conference. Systems running BCM Release 3.5 or later allow codec negotiation and renegotiation to accommodate inconsistencies in codec settings over VoIP trunks.
Enable Voice Activity Detection	<check box>	Voice Activity Detection (VAD), also known as silence suppression, identifies periods of silence in a conversation and stops sending IP speech packets during those periods. In a typical telephone conversation, most of the conversation is half-duplex, meaning that one person is speaking while the other is listening. If VAD is enabled, no voice packets are sent from the listener end. This greatly reduces bandwidth requirements. G.723.1 and G.729 support VAD. G.711 does not support VAD. **Performance note:** VAD on all networked BCMs and IPT systems must be consistent to ensure functionality of features such as Transfer and Conference. The Payload size on the IPT must be set to 30ms.

Copyright © 2008, Nortel Networks

Field	Value	Description
Jitter buffer	Auto None Small Medium Large	Select the size of jitter buffer for your system.
G.729 payload size (ms) **G.723 payload size (ms)** **G.711 payload size (ms)**	10,20,30,40,50,60 30 10,20,30,40,50,60	Set the maximum required payload size, per codec, for the VoIP calls sent over H.323 trunks. **Note:** Payload size can also be set for Nortel IP telephones. See *BCM 4.0 Telephony Device Installation Guide* (N0060609).
Incremental payload size	<check box>	When enabled, the system advertises a variable payload size (40, 30, 20, 10 ms).
Enable T.38 fax	<check box>	When enabled, the system supports T.38 fax over IP. **Caution:** Fax tones broadcast through a telephone speaker may disrupt calls at other telephones using VoIP trunks in the vicinity of the fax machine. To minimize the possibility of your VoIP calls being dropped due to fax tone interference: • place the fax machine away from other telephones • turn the fax machine's speaker volume to the lowest level, or off, if available
Force G.711 for 3.1k Audio	<check box>	When enabled, the system forces the VoIP trunk to use the G.711 codec for 3.1k audio signals, such as modem or TTY machines. **Note:** You also can use this setting for fax machines if T.38 fax is not enabled on the trunk.

Table 20
SIP Media Parameters fields

Field	Value	Description
Preferred Codecs	G.711 -uLaw G.711 -aLaw G.729	Add codecs to the Selected list and order them in the order in which you want the system to attempt to use them. The system attempts to use the codecs in a top-to-bottom sequence.

Copyright © 2008, Nortel Networks

Field	Value	Description
	G.723	**Performance note:** Codecs on all networked BCMs must be consistent to ensure the proper functionality of interacting features such as Transfer and Conference. Systems running BCM Release 3.5 or later allow codec negotiation and renegotiation to accommodate inconsistencies in codec settings over VoIP trunks.
Enable Voice Activity Detection	<check box>	Voice Activity Detection (VAD), also known as silence suppression, identifies periods of silence in a conversation and stops sending IP speech packets during those periods. In a typical telephone conversation, most of the conversation is half-duplex, meaning that one person is speaking while the other is listening. If VAD is enabled, no voice packets are sent from the listener end. This greatly reduces bandwidth requirements. G.723.1 and G.729 support VAD. G.711 does not support VAD. **Performance note:** VAD on all networked BCMs and IPT systems must be consistent to ensure functionality of features such as Transfer and Conference. The Payload size on the IPT must be set to 30ms.
Jitter Buffer	Auto None Small Medium Large	Select the size of jitter buffer for your system.
G.729 payload size (ms) **G.723 payload size (ms)** **G.711 payload size (ms)**	10,20,30,40,50,60 30 10,20,30,40,50,60	Set the maximum required payload size, per codec, for the VoIP calls sent over H.323 trunks. **Note:** Payload size can also be set for Nortel IP telephones. See *BCM 4.0 Telephony Device Installation Guide* (N0060609).
Enable T.38 fax	<check box>	When enabled, the system supports T.38 fax over IP. **Caution:** Fax tones broadcast through a telephone speaker may disrupt calls at other telephones using VoIP trunks in the vicinity of

Copyright © 2008, Nortel Networks

Field	Value	Description
		the fax machine. To minimize the possibility of your VoIP calls being dropped due to fax tone interference: • place the fax machine away from other telephones • turn the fax machine's speaker volume to the lowest level, or off, if available

Configuring local Gateway parameters

Perform the following procedure to configure local Gateway parameters.

Configuring local Gateway parameters

Step	Action
1	Log on to Element Manager.
2	In the **Task Navigation Panel**, select the **Configuration** tab.
3	Select **Resources > Telephony Resources**.
4	In the **Modules** panel, select the line in which the **Module Type** column is set to **IP Trunks**. See Figure 70 "Telephony Resources" (page 133).
5	For H.323 VoIP trunks, select the **H.323 Settings** tab. See Figure 71 "H.323 Settings" (page 138).

Copyright © 2008, Nortel Networks

Figure 71
H.323 Settings

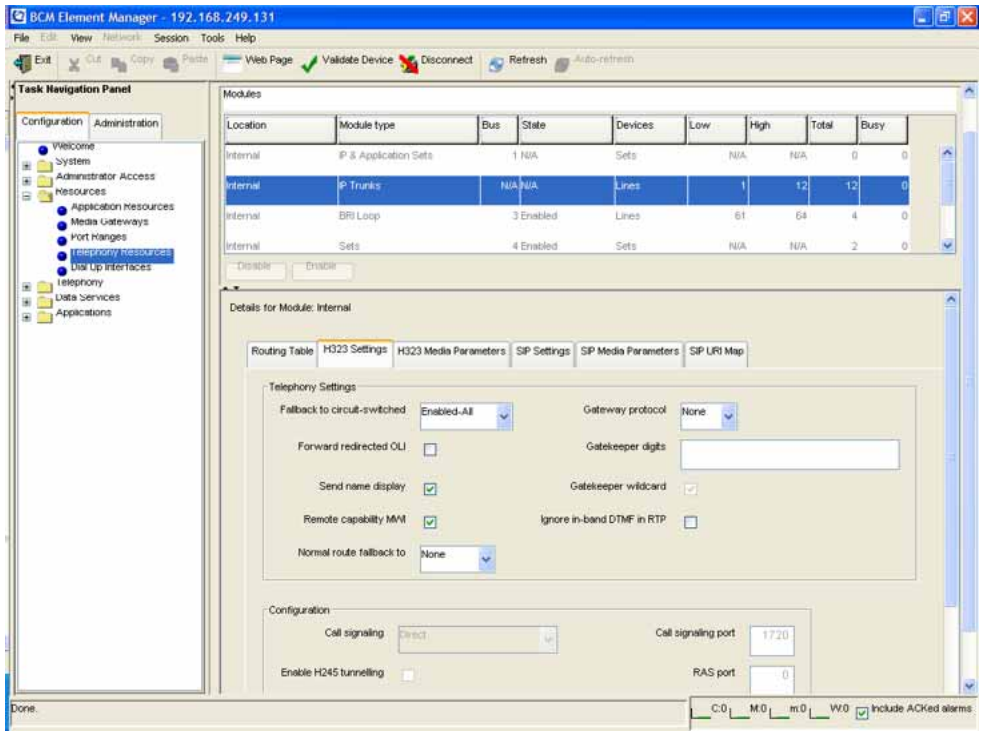
BCM Element Manager - 192.168.249.131
File Edit View Network Session Tools Help
Exit Cut Copy Paste Web Page Validate Device Disconnect Refresh Auto-refresh
Task Navigation Panel
Configuration Administration
Welcome
System
Administrator Access
Resources
Application Resources
Media Gateways
Port Ranges
Telephony Resources
Dial Up Interfaces
Telephony
Data Services
Applications
Modules
Location Module type Bus State Devices Low High Total Busy
Internal IP & Application Sets 1 N/A Sets N/A N/A 0 0
Internal IP Trunks N/A N/A Lines 1 12 12 0
Internal BRI Loop 3 Enabled Lines 61 64 4 0
Internal Sets 4 Enabled Sets N/A N/A 2 0
Disable Enable
Details for Module: Internal
Routing Table H323 Settings H323 Media Parameters SIP Settings SIP Media Parameters SIP URI Map
Telephony Settings
Fallback to circuit-switched Enabled-All
Gateway protocol None
Forward redirected OLI
Gatekeeper digits
Send name display
Gatekeeper wildcard
Remote capability MWI
Ignore in-band DTMF in RTP
Normal route fallback to None
Configuration
Call signaling Direct
Call signaling port 1720
Enable H245 tunnelling
RAS port 0
Done.
C:0 M:0 m:0 W:0 Include ACKed alarms

6 When implementing your dialing plan, in the **H323 Settings** tab, select a value for **Fall back to circuit-switched**. This determines how the system handles calls if the IP network cannot be used.

7 For **Gateway protocol**, select **CSE**.

8 Scroll down to **Alias names** and click **Modify**.
The Modify Call Signaling Settings page appears.

9 Enter the information that supports your system.
Applying the changes made to the Call Signaling Settings causes all H.323 calls to be dropped. It is recommended that you make changes to the Call Signaling Settings during off-peak hours or a scheduled maintenance window.
Refer to Table 21 "H.323 Call Signaling Settings fields" (page 139).

Copyright © 2008, Nortel Networks

Table 21
H.323 Call Signaling Settings fields

Field	Value	Description
Call signaling	Direct	Call signaling information is passed directly between H.323 endpoints. You must set up remote Gateways.
	Gatekeeper Resolved	All call signaling occurs directly between H.323 endpoints. This means that the Gatekeeper resolves the phone numbers into IP addresses, but the Gatekeeper is not involved in call signaling.
	Gatekeeper Routed	Gatekeeper Routed uses a Gatekeeper for call setup and control. In this method, call signaling is directed through the Gatekeeper.
	Gatekeeper Routed no RAS	Use this setting for a NetCentrex Gatekeeper. With this setting, the system routes all calls through the Gatekeeper but does not use any of the Gatekeeper Registration and Admission Services (RAS). Choose this option if RAS is not enabled on the NRS.
Call signaling port	<port value>	If VoIP applications are installed that require nonstandard call signaling ports, enter the port number here. Port number 0 means that the system uses the first available port. The default port for call signaling is 1720.
RAS port	<port value>	If the VoIP application requires a nonstandard RAS port, enter the port number here. Port number 0 means that the system uses the first available port.
Enable H245 tunneling	<check box>	Select this field to allow H.245 messages within H.225. Restart the VoIP service for this feature to take effect.
Primary Gatekeeper IP	<IP address>	Fill in this field only if the network is controlled by a Gatekeeper. This is the IP address of the primary Gatekeeper (TLAN IP address).
Backup Gatekeeper (s)	<IP address>	NetCentrex Gatekeeper does not support RAS. Any backup Gatekeepers must be entered in this field. Gatekeepers that use RAS can provide a list of backup Gatekeepers for the endpoint to use in the event of a primary Gatekeeper failure.

Copyright © 2008, Nortel Networks

Field	Value	Description
Alias names	NAME:<alias name>	Enter the alias names of the BCM required to direct call signals to your system. **Note:** The Alias name is case sensitive. It must match the name configured in NRS.
Registration TTL(s)	<numeric value>	Specifies the keep-alive interval.

10 For SIP trunks, select the **SIP Settings** tab.
See Figure 72 "SIP Settings" (page 140).

Figure 72
SIP Settings

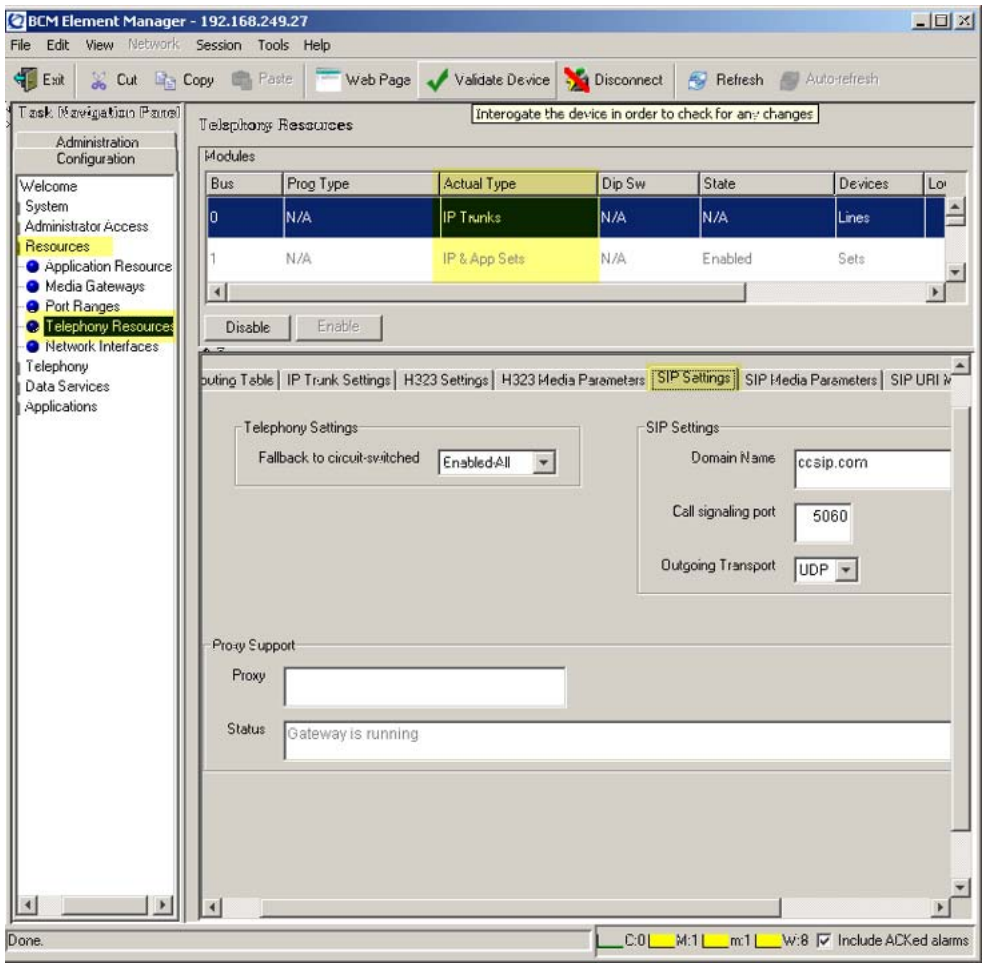

11 Enter the information that supports your system.
Refer to Table 22 "SIP Settings fields" (page 141) for more information.

Copyright © 2008, Nortel Networks

Table 22
SIP Settings fields

Field	Value	Description
Fallback to circuit-switched	Disabled	Defines how you want the system to handle calls that the system fails to send over the VoIP trunk. Enabled-TDM enables fallback for calls originating on digital telephones. This is useful if your IP telephones are connected remotely, on the public side of the BCM network, because PSTN fallback is unlikely to result in better quality of service.
	Enabled-TDM	
	Enabled-All	
Domain Name		Type the domain name of the SIP network.
Call signaling port	<port value>	If VoIP applications are installed that require nonstandard call signaling ports, enter the port number here. Port number 0 means that the system uses the first available port.
Outgoing Transport	UDP	
	TCP	
Proxy		If entered, all SIP calls originate to this address.
Status	Read Only	This field displays the current status of the Gatekeeper.

—End—

Configuring VoIP lines

Voice over IP (VoIP) lines simulate traditional Central Office (CO) lines. VoIP lines transmit data over an IP network rather than over physical lines.

Configuring VoIP lines

Step	Action
1	Log on to Element Manager.
2	In the **Task Navigation Panel**, select the **Configuration** tab.
3	Select **Telephony > Lines > All Lines**.
4	Highlight the individual line you wish to configure.
5	Select the **Preferences** tab. See Figure 73 "Preferences" (page 142).

Copyright © 2008, Nortel Networks

Figure 73
Preferences

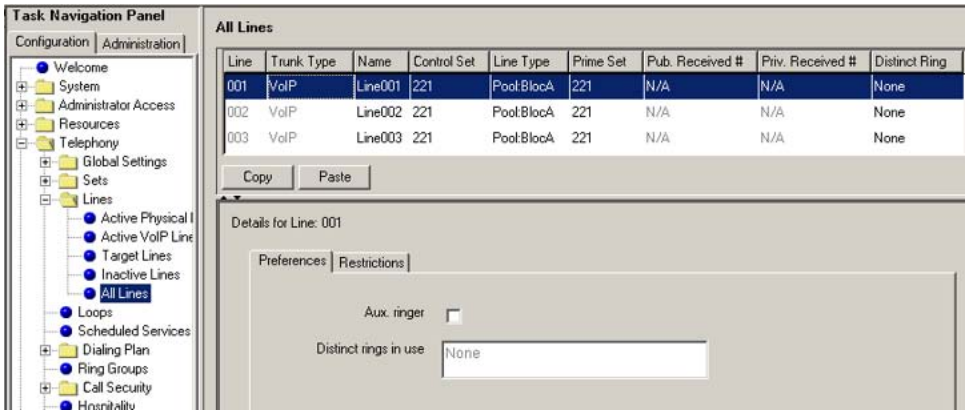

6 Configure the Preferences tab appropriately for your network. Refer to Table 23 "Preferences fields" (page 142) for configuration information.

Table 23
Preferences fields

Field	Value	Description
Aux. ringer	<check box>	If your system is equipped with an external ringer, you can enable this setting so that this line rings at the external ringer.
Distinct rings in use	Read only	Indicates whether a special ring is assigned.

7 Select the **Restrictions** tab.
See Figure 74 "Restrictions" (page 143).

Copyright © 2008, Nortel Networks

Figure 74
Restrictions

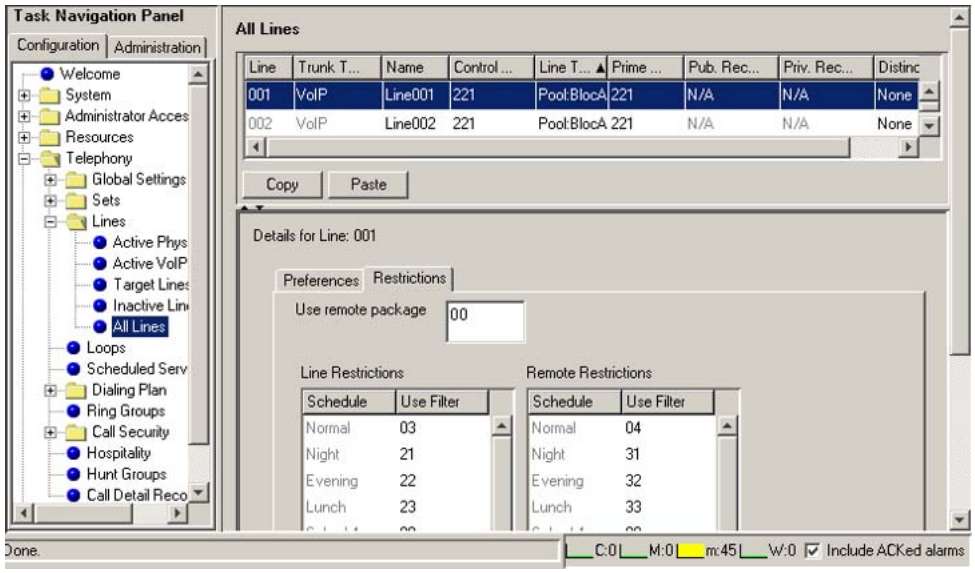

8 Configure the Restrictions tab appropriately for your network. Refer to Table 24 "Restrictions fields" (page 143) for configuration information.

Table 24
Restrictions fields

Field	Value	Description
Use remote package	< package #>	If the line is used to receive external calls or calls from other nodes on the private network, ensure that you indicate a remote package that provides only the availability that you want for external callers. This attribute is typically used for tandeming calls.
Schedule	Default: Normal, Night, Evening, Lunch, Sched 4, Sched 5, Sched 6	
Line Restrictions - Use Filter	<00-99>	Enter the restriction filter number that applies to each schedule. These settings control outgoing calls.
Remote Restrictions - Use Filter	<00-99>	Enter the restriction filter that applies to each schedule. These settings provide call controls for incoming calls over a private network or from a remote user dialing in over PSTN.

Copyright © 2008, Nortel Networks

9 In the **Task Navigation Panel**, in the **Configuration** tab, select **Telephony > Sets > All DNs**.

10 Highlight the individual line you wish to configure.

11 Select the **Line Assignment** tab.
See Figure 75 "Line Assignment" (page 144).

Figure 75
Line Assignment

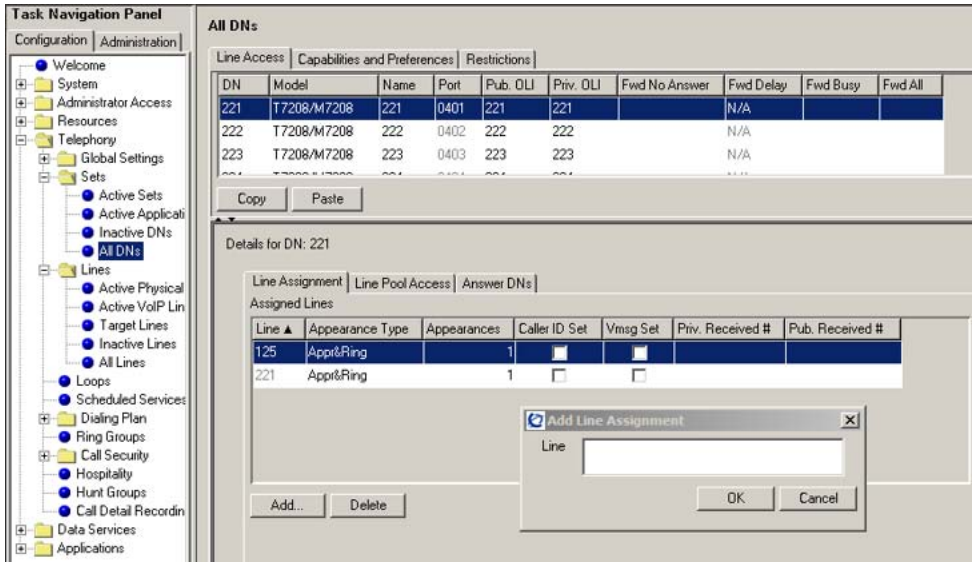

12 Edit the listed DNs, or click **Add** to add a DN as required.

13 Enter the appropriate information for your network.
Refer to Table 25 "Assigned DNs fields" (page 144) for configuration information.

Table 25
Assigned DNs fields

Field	Value	Description
DN		Unique number
Appearance Type	Ring Only Appr&Ring Appr Only	Select Appr Only or Appr&Ring if the telephone has an available button. Otherwise select Ring Only.
Appearances		Target lines can have more than one appearance to accommodate multiple calls. For telephones that have these lines set to Ring Only, set to None.

Copyright © 2008, Nortel Networks

Field	Value	Description
Caller ID Set	<check box>	When enabled, displays caller ID for calls coming in over the target line.
Vmsg Set	<check box>	When enabled, an indicator appears on the telephone when a message is waiting from a remote voice mail system. Check with your system administrator for the system voice mail setup before changing this parameter.

—End—

Configuring target lines

Target lines are virtual communication paths between trunks and telephones on the BCM system. They are incoming lines only and cannot be selected for outgoing calls or networking applications.

Configuring target lines

Step	Action
1	Log on to Element Manager.
2	In the **Task Navigation Panel**, select the **Configuration** tab.
3	Select **Telephony > Lines > Target Lines**.
4	Highlight the individual line you wish to configure.
5	Select the **Preferences** tab and enter the appropriate information for your network. See Figure 76 "Preferences" (page 146). Refer toTable 26 "Preferences fields" (page 146) for configuration information.

Copyright © 2008, Nortel Networks

Figure 76
Preferences

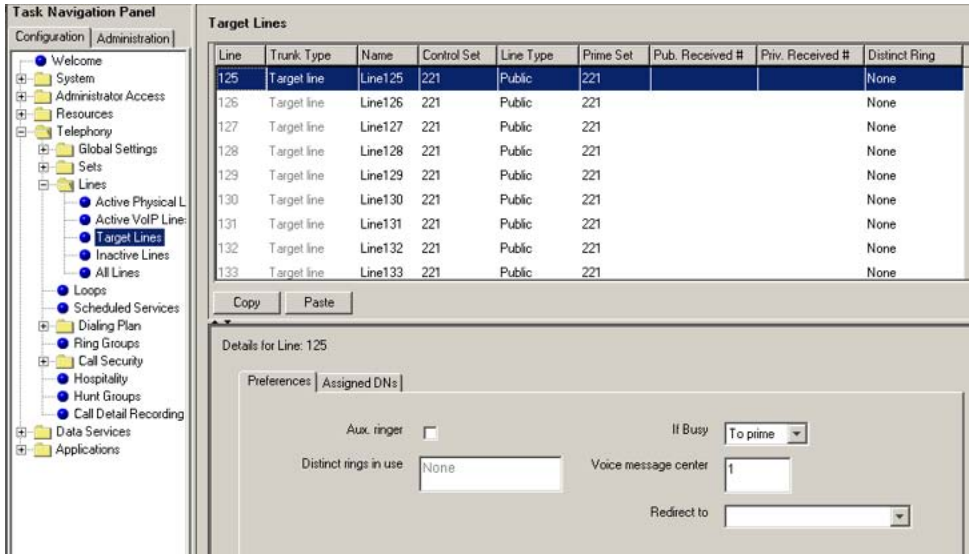

Table 26
Preferences fields

Field	Value	Description
Aux. ringer	<check box>	If your system is equipped with an external ringer, you can enable this setting so that this line rings at the external ringer.
If Busy	Busy tone To Prime	To automatically direct calls to the prime telephone, select To prime. Otherwise, select Busy tone.
Distinct rings in use	Read only	
Voice message center		If the system is using a remote voice mail, select the center configured with the contact number.
Redirect to		To automatically direct calls out of the system to a specific telephone, such as a head office answer attendant, enter that remote number here. Ensure that you include the proper routing information.

6 Select the **Assigned DNs** tab.
See Figure 77 "Assigned DNs" (page 147).

Copyright © 2008, Nortel Networks

Figure 77
Assigned DNs

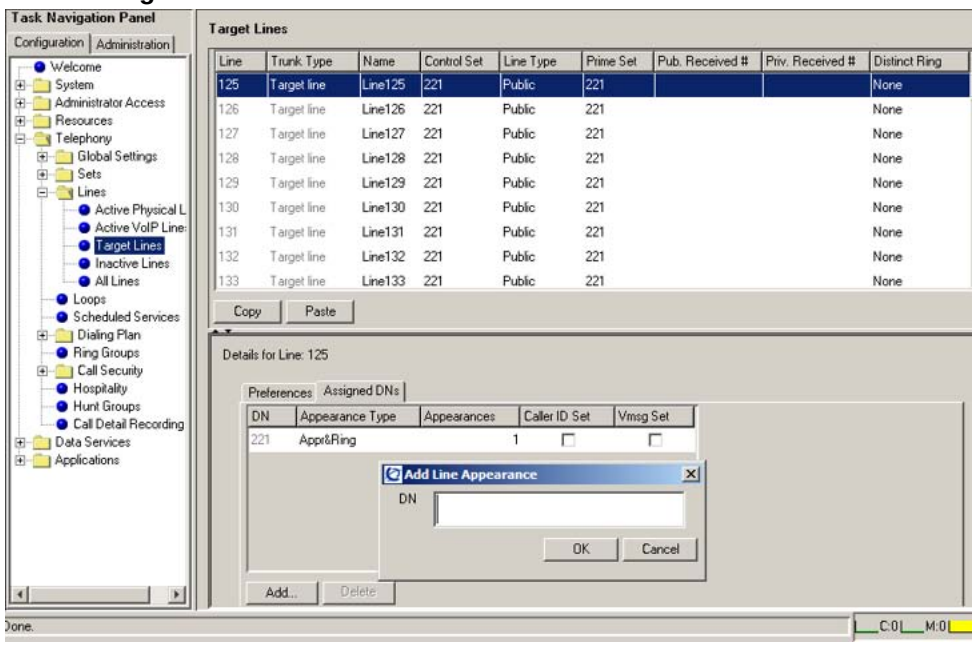

7 Edit the listed DNs, or click **Add** to add a DN as required.

8 Enter the appropriate information for your network.
Refer to Table 18 "Assigned DNs fields" (page 129) for configuration information.

—End—

Copyright © 2008, Nortel Networks

Copyright © 2008, Nortel Networks

Testing and troubleshooting

This chapter contains procedures to test and troubleshoot your Communication Server 1000/Business Communications Manager (BCM) integration.

Testing and troubleshooting procedures

The sequence of testing and troubleshooting procedures is as follows:

- "Testing" (page 149)
  - "Testing the integration from the BCM system" (page 150)
  - "Testing the integration from the CS 1000 system" (page 152)
- "Troubleshooting" (page 152)
  - "BCM is unable to contact the gatekeeper at IP address" (page 152)
  - "Unable to complete any calls" (page 152)
  - " Cannot make calls between the CS 1000 and BCM" (page 153)
  - "BCM fails to register to NRS" (page 153)
  - " H.323 Gateway service is down" (page 154)

Testing

The CS 1000/BCM integration is considered successful if BCM and Network Routing Service (NRS) are able to register to each other. You can determine this from either the CS 1000 side or the BCM side.

Successful call completion is not a criterion of integration success because call completion is dependent on the dialing plan and how it is implemented. For information about dialing plans, see *Dialing Plans: Description* (553-3001-183).

Copyright © 2008, Nortel Networks

Testing the integration from the BCM system

Step	Action
1	Log on to Element Manager on the BCM system.
2	Select **Resources > Telephony Resources**. See Figure 78 "Status" (page 151).

Copyright © 2008, Nortel Networks

Figure 78
Status

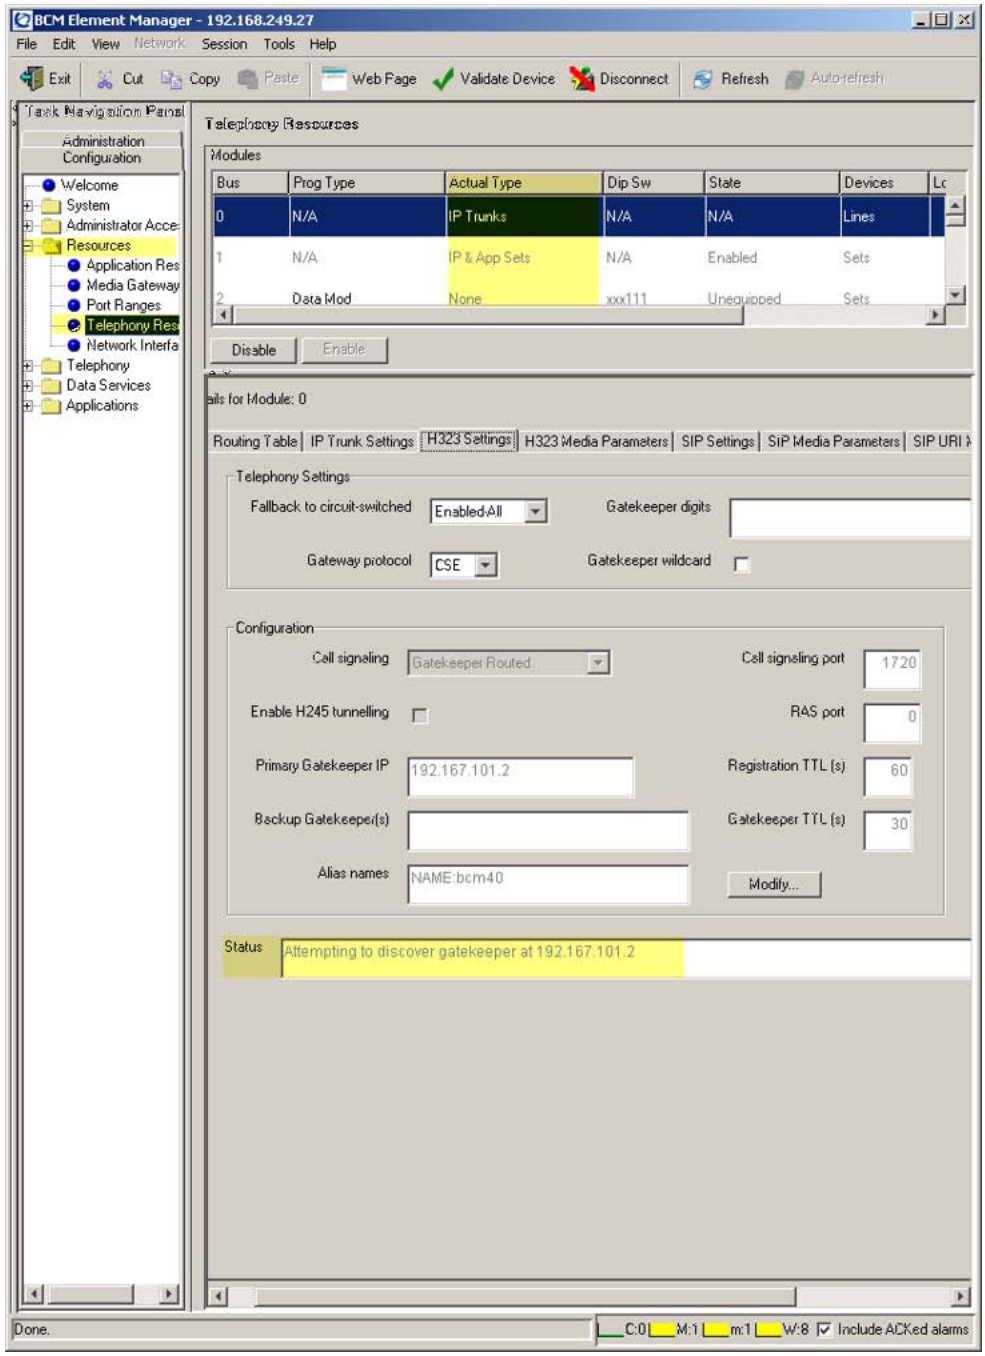

3 In the **Actual Type** column, highlight **IP Trunks**.

4 In the bottom half of the page, select the **H323 Settings** tab.

Copyright © 2008, Nortel Networks

5 Scroll down to the **Status** bar to determine if the two systems are successfully registered.

—End—

Testing the integration from the CS 1000 system

To determine if the two systems are registered from the CS 1000 side, check the status of the endpoints. Refer to the procedure "Checking the status of registered endpoints" (page 106).

Troubleshooting

Refer to these troubleshooting procedures to resolve common integration issues.

BCM is unable to contact the gatekeeper at IP address

Step	Action
1	Check whether you are able to ping the Gatekeeper across the network. If not, a routing issue can exist in your network. Contact your network administrator to resolve any routing issues.
2	Check that the correct Gateway endpoint IP address is configured in BCM. You may need to reset the feps service under the Service Manager.
3	Check that the correct Gateway endpoint IP address is configured in the CS 1000.
4	Check that the Alias name is properly configured in BCM. The alias name is case sensitive and must match exactly what is configured in the CS 1000.
5	Check that the Gateway protocol is set to CSE.

—End—

Unable to complete any calls

Step	Action
1	Check whether the BCM and Gatekeeper have established connectivity.

Copyright © 2008, Nortel Networks

If not, ensure that the BCM and NRS can communicate with each other.

2 Check that the line is configured for outgoing calls.
DNs need to have lines configured for both incoming and outgoing calls. Check your networks dialing plan or see *Dialing Plans: Description* (553-3001-183).

3 Verify that the dialing plan has been properly implemented on both the CS 1000 and BCM.
For more information about dialing plans, see *Dialing Plans: Description* (553-3001-183).

—End—

Cannot make calls between the CS 1000 and BCM

Symptoms:

- calls between the CS 1000 and BCM fail
- CDP calls fail
- no channel/circuit is available

Step	Action
1	Verify your dialing plan and call routing.
2	On the BCM, log on to Element Manager and select **Telephony > Dialing Plan > Private Network**.
3	Verify that **Private Network Type** is set to **CDP**.
4	Ensure that packets are not blocked by your network firewall.

—End—

BCM fails to register to NRS

Symptoms:

- BCM fails to register to the NRS
- calls fail between the CS 1000 and BCM in both directions

Step	Action
1	Check whether you can ping the BCM from the NRS command line.

Copyright © 2008, Nortel Networks

If unsuccessful, check your network settings. Note that the NRS does not respond to pings.

2 In the **H323 Settings** tab for IP trunks under **Resources > Telephony Resources**, verify that the BCM includes its alias name as “NAME:aliasname”.

3 Verify that the **Alias** names match on the NRS and BCM.

4 In the **H323 Settings** tab for IP trunks under **Resources > Telephony Resources**, make sure the Gateway protocol is set to **CSE**.

5 Verify that the NRS has the proper routing entries.

—End—

H.323 Gateway service is down

Symptoms:

- VoIP H.323 Gateway service is down
- VoIP Gateway cannot be started manually
- VoIP Gateway does not start after a reboot or power cycle

Step	Action
1	On the BCM, log on to Element Manager.
2	Select **Resources > Telephony Resources**.
3	In the **Actual Type** column, highlight **IP Trunks**.
4	Select the **H.323 Settings** tab and verify that the **Call signaling port** is set to **1720**.
5	Refer to the procedure "Testing the integration from the BCM system" (page 150).

—End—

Copyright © 2008, Nortel Networks

Enterprise: Common

Solution Integration Guide for Communication Server 1000 Release 5.0/Business Communications Manager

Copyright © 2008, Nortel Networks
All Rights Reserved.

Publication: NN43001-326
Document status: Standard
Document version: 01.06
Document date: 12 March 2008

To provide feedback or report a problem in this document, go to www.nortel.com/documentfeedback.

LEGAL NOTICE
While the information in this document is believed to be accurate and reliable, except as otherwise expressly agreed to in writing NORTEL PROVIDES THIS DOCUMENT "AS IS" WITHOUT WARRANTY OR CONDITION OF ANY KIND, EITHER EXPRESS OR IMPLIED. The information and/or products described in this document are subject to change without notice.

Nortel, the Nortel logo, and the Globemark are trademarks of Nortel Networks.
Microsoft, MS, MS-DOS, Windows, and Windows NT are trademarks of Microsoft Corporation.
All other trademarks are the property of their respective owners.

Sourced in Canada.